



CPI installation system

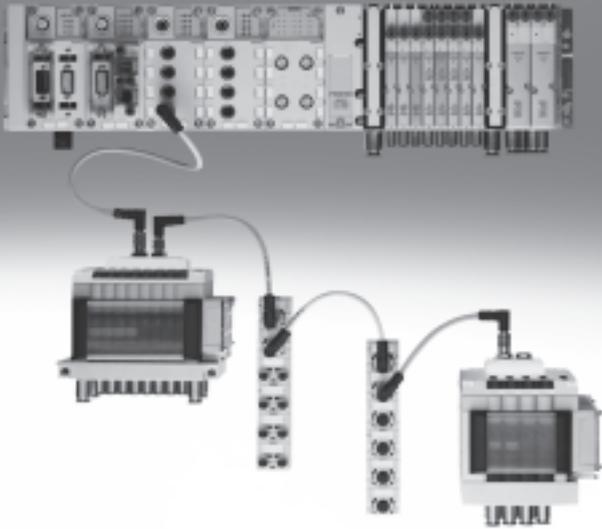

CPI installation system

Key features

FESTO

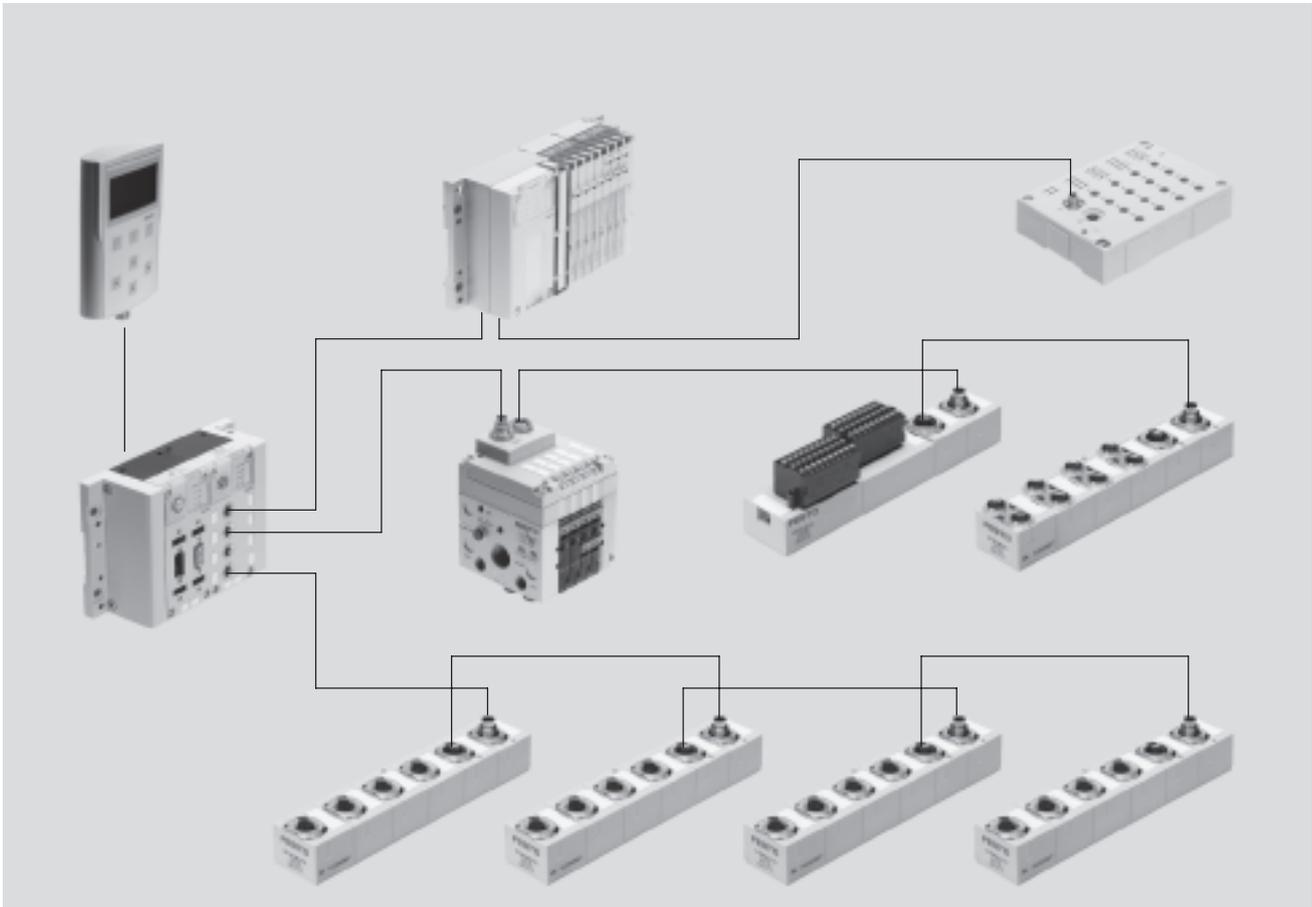

Innovative

- Complete concept for decentralised machine and system structure; centralised and decentralised installation can be combined with the CPX terminal
- Decentralised pneumatics and sensors for fast processes
- Centralised electrics for fieldbus and common power supply
- Flexible configuration of the individual CP strings
- Selectable valve terminal sizes for optimum pneumatic control loop systems
- Performance data as for the CP system with the addition of the comprehensive diagnostic capabilities of the CPX terminal

Sturdy

- Electrical accessories to IP65
- Proven valve terminals CPV (compact), MPA (sturdy, modular), CPV-SC (small, compact) and CPA (modular manifold sub-bases)
- Electrical input and output modules in metal housing or compact in encapsulated plastic housing
- Sturdy connection technology M12, alternatively M8
- IP20 modules for control cabinet installation with spring-loaded terminals or screw terminals

Versatile

- A number of CP interfaces can be combined under one fieldbus node
- Four CP strings up to 10 m in length (radius) facilitate optimum decentralisation
- Max. 32 inputs and 32 outputs/valves per string
- Available valves:
 - Valve terminal type 32 MPA, flow rate max. 700 l/min
 - Valve terminal type 10 CPV, flow rate max. 1,600 l/min
 - Valve terminal type 80 CPV-SC, flow rate max. 170 l/min
 - Valve terminal type 12 CPA, flow rate max. 650 l/min
- Input modules with 8 ... 32 inputs and output modules with 4 ... 8 outputs, each with or without additional power supply
- Universal electrical outputs

Reliable

- Sturdy modules and accessories
- Ready to install system including CP cable (hybrid cable for data and power)
- Polarity-safe and short circuit proof connections
- Valves with separate load voltage supply
- All modules equipped with local diagnostics and status LEDs
- Diagnostics of each CP string via controller/fieldbus
- Intelligent system (save button) "learns" current configuration
- Easy replacement of modules at any time

CPI installation system

Key features

CPI installation system

The CPI system is capable of meeting two completely different requirements and resolves the conflict between extensive decentralised modularisation and electrical installation.

High-speed machines require short cycle times and short pneumatic tubing. The valves must be mounted close to the cylinders. The CPI system was developed to meet these requirements without having to wire each valve individually.

The system integrates the modular valve terminals CPV, the manifold sub-base valve terminal CPA and various input/output modules in a single installation concept.

All CP valve terminals and CP modules are connected using a ready to install CP cable, and are attached to the CP interface. Four modules, for example one CPV valve terminal and one to three CP input modules, make up an installation string that ends at the CP interface.


Scope of features:

- Max. 4 installation strings per CP interface
- Max. 10 metre line length per string (radius)
- Max. 4 CP modules per string
- Max. 32 inputs and max. 32 outputs per string

The number of CP modules that can be connected and the number of inputs/outputs is dependent on the type of CP

module and CP interface. The maximum configuration (4 modules per string, 32 inputs/outputs) is only possible in combination with the CPX terminal and CP modules with CPI functionality.

The CP interface is the central connection point for the valve power supply and the sensor supply. The power supply for the sensors connected to the input modules is separate from the load voltage of the valves.

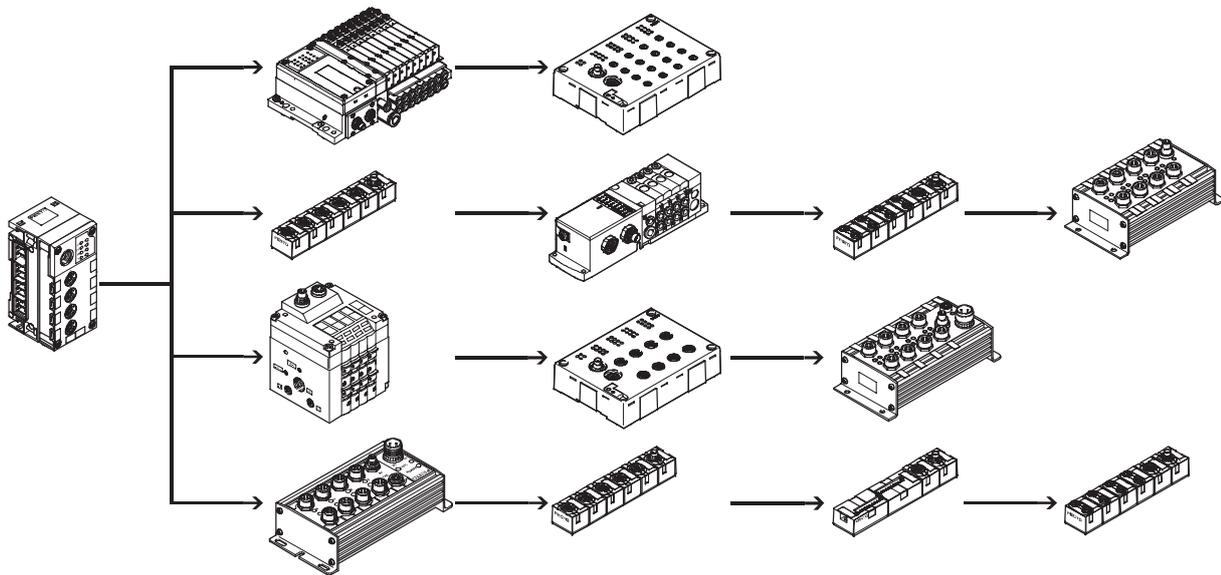


CPI installation system

Key features




Node types:


Fieldbus/control block
CPX with CP interface
CPX-...

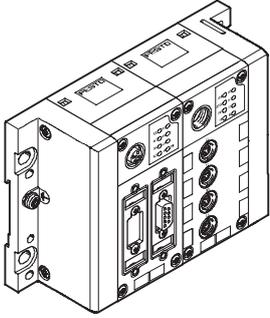


Fieldbus/control block
Type 03/04 with CP interface
ISF3-03

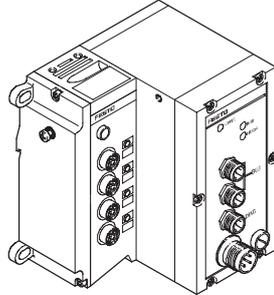

CP fieldbus node
CP-E

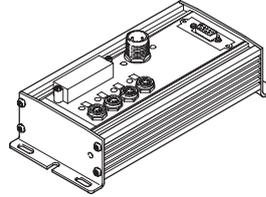

Valve terminal
with CP string extension
CPV, CPA-SC, CPV-SC, CDVI-DN, MPA

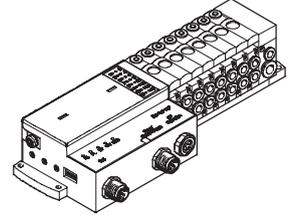

CPI installation system

Ordering system



Configurator


Online via: → www.festo.com

Selecting a CPI system using the online catalogue is quick and easy thanks to the convenient configurator provided. This makes it much easier to find the right product.

Components from the CPI system series, type CTEC, are ordered using the order code.

Ordering system for type 55E

→ Internet:cpi

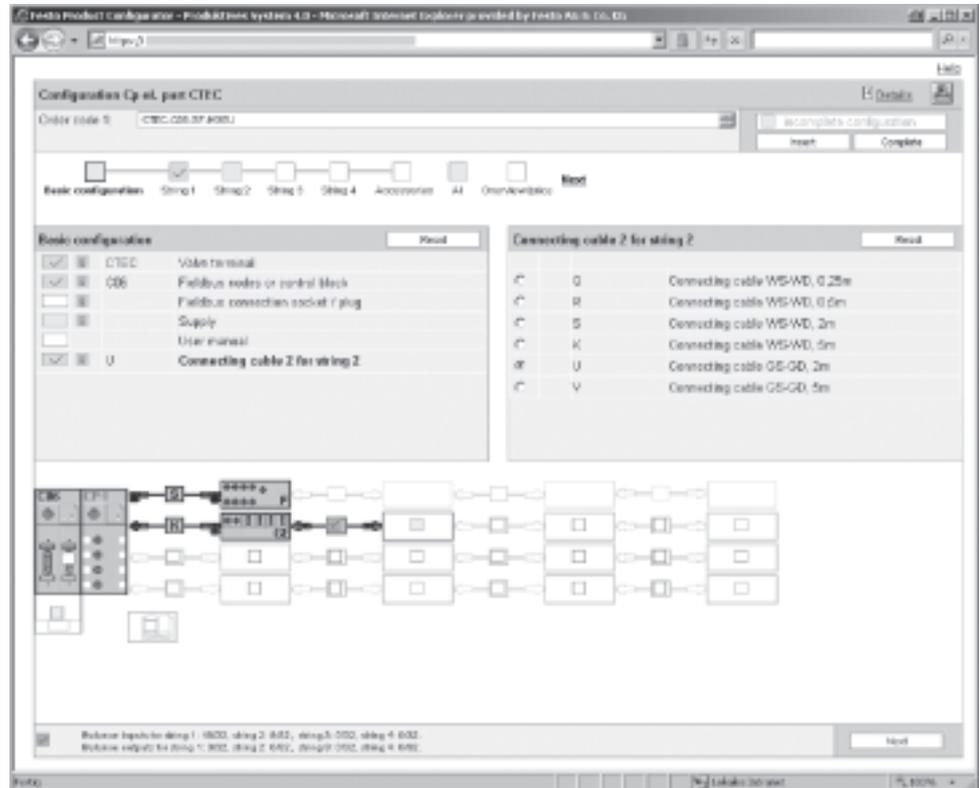

The illustration above provides an example of a configuration. The following steps explain how you arrive at the order code:

Once you have called up → www.festo.com, click on “Automation” and select the “Catalogue” from the “Products” submenu; this will take you directly to the home page of the catalogue. Then select “Control systems / bus systems / electrical periph-

erals”. Under the heading “Electrical terminals”, click on the link “For valve terminals type 10 CPV, type 12 CPA”. Select the required individual components or the entire system (type “CTEC”).

Once you have added your selection to the basket, you can configure the CPI system step by step (from left to right) according to your requirements.


CPI installation system

Peripherals overview

FESTO

Integration of the CPI installation system in various connection concepts

Centralised pneumatic connection (valve terminal)

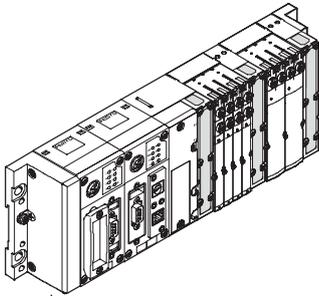


Advantages

- Pneumatic multiple connector plate
- Less tubing required than with individual valves
- Common valve air supply
- Central positioning
- Material, weight and cost savings

Disadvantages

- Only effective with a large number of closely spaced actuators
- Heavier than an individual valve (lower overall weight than the same number of individual valves), which may make assembly on moving systems or in very cramped installation spaces difficult
- Longer tube lengths are occasionally required, ruling out the possibility of optimum pneumatic performance

Decentralised pneumatic connection (individual valve/valve on individual sub-base)

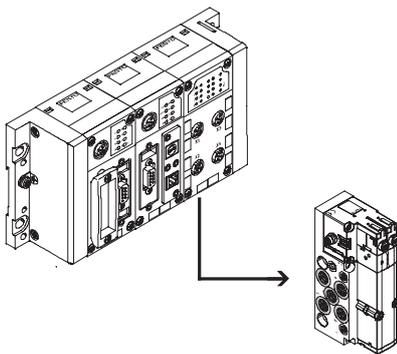

Advantages

- Can be positioned directly at the actuator, can even be integrated
- Short tubing length to the actuator enables short switching times
- Optimum pneumatic timing and performance possible

Disadvantages


- Air supply per valve requires more tubing
- Serial electrical interlinking not advisable/possible
- More complex electrical installation

CPI installation system

Peripherals overview

Integration of the CPI installation system in various connection concepts

Centralised electrical connection (multi-pin plug/fieldbus connection/standalone minicontroller)

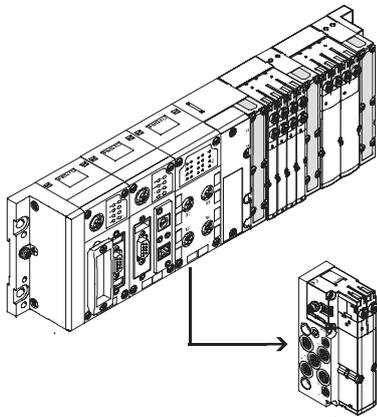


Advantages

- Internal electrical interlinking requires less cabling
- Increased transparency
- Material, weight and cost savings
- Ideal for connecting a large number of closely spaced valves

Disadvantages

- Not suitable for individual, more widely separated applications due to the more complex cabling
- More complex individual components (cables, fieldbus modules)

Decentralised electrical connection (CPI system/individual valve/valve on individual sub-base/valve manifold)

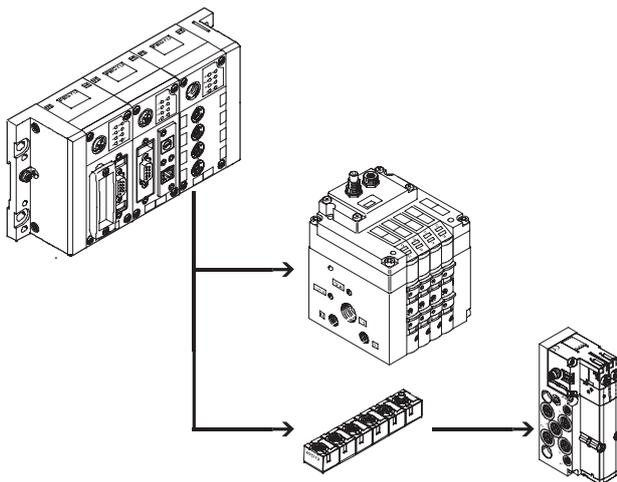

Advantages

- CPI system with reduced installation complexity for groups of actuators/sensors
- Different levels of complexity with widely separated individual components
- Easy replacement of components during servicing
- Optimum pneumatic timing and performance possible

Disadvantages

- Limited spatial expansion possible (CPI system up to 10 m, AS-interface up to 100 m)
- High installation costs


CPI installation system

Peripherals overview



Integration of the CPI installation system in various connection concepts

Combined centralised and decentralised connection (valve terminal with CP interface/output module)

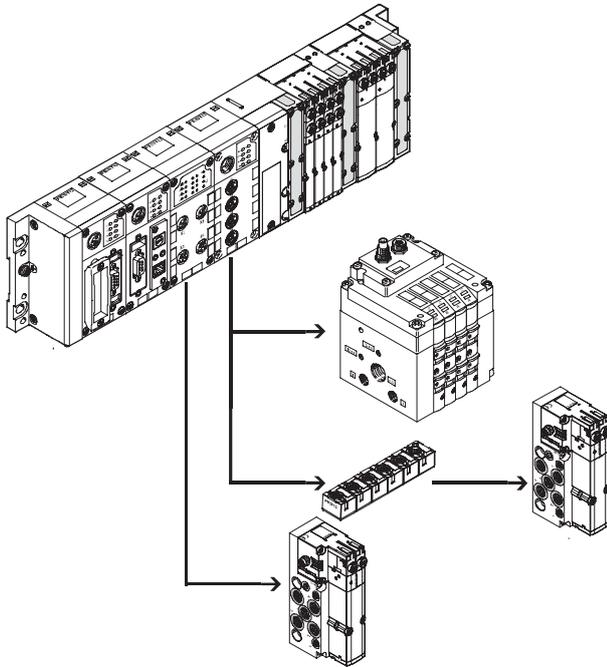

Advantages

- Can be scaled to different requirements within a system
- One control interface in the system, reduces installation complexity with closely and widely spaced actuators
- Enables an optimum electrical and pneumatic control chain

Disadvantages

- Application must at least partially meet the requirements of a centralised connection

Connection of the CPI installation system to a higher-level controller

Fieldbus node/Industrial Ethernet

Different bus nodes are used for integration in the control systems of various manufacturers. The CPI system can therefore be operated via more than 90% of the most commonly used fieldbus systems.

- Profibus DP
- Profinet
- Interbus
- DeviceNet
- Ethernet IP
- CANopen
- CC-Link

Control block

The optional Front End Controller CPX-FEC enables simultaneous access via Ethernet and an integrated web server, as well as autonomous pre-processing.

- Ethernet
- TCP/IP
- Web


CPI installation system

Peripherals overview



Connection of the CPI installation system to a higher-level controller

Overview

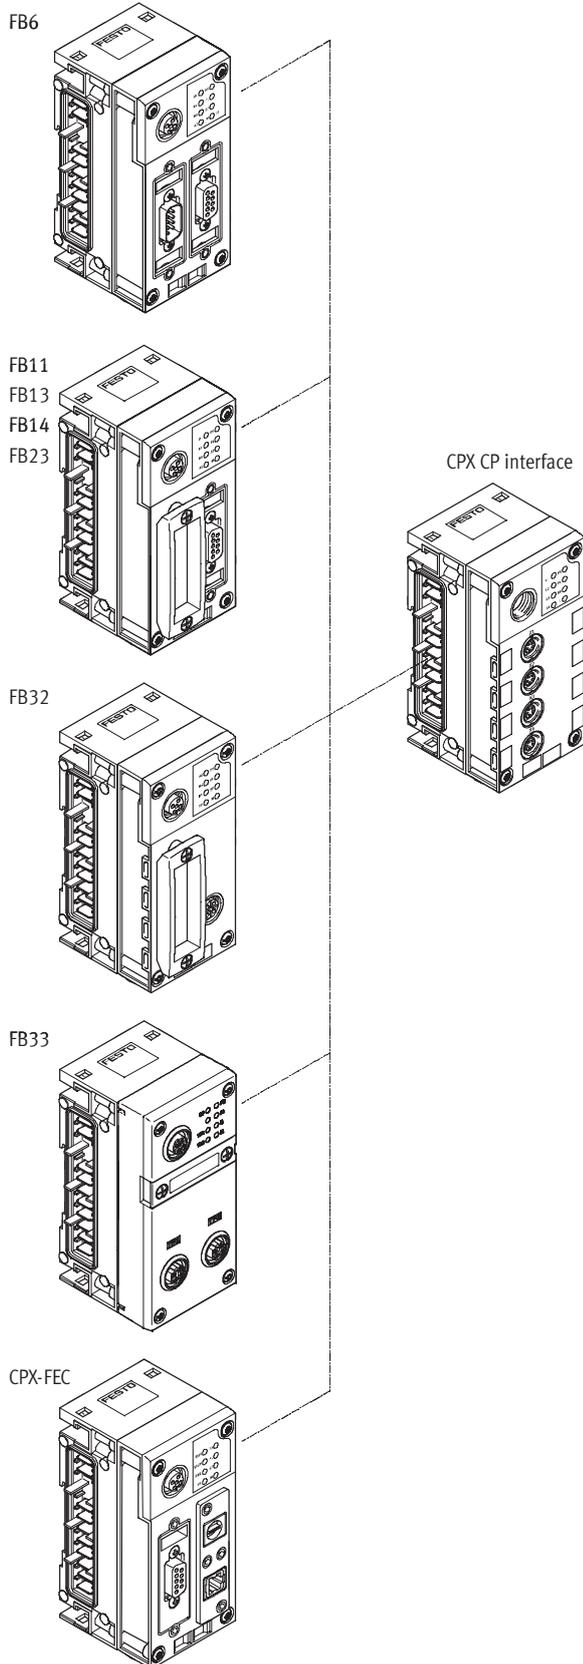

Bus protocol/fieldbus node

Interbus

FB6

Special features

- Up to 96 digital inputs/outputs
- 6 analogue inputs/outputs

DeviceNet

FB11

- Up to 512 digital inputs/outputs
- 18 analogue inputs/outputs

Profibus DP

FB13

- Up to 512 digital inputs/outputs
- 18 analogue inputs/outputs

CANopen

FB14

- Up to 64 digital inputs and 64 digital outputs
- 8 analogue inputs and 8 analogue outputs

CC-Link

FB23

- Up to 64 digital inputs/outputs
- 16 analogue inputs/outputs

Ethernet/IP

FB32

- Up to 128 digital inputs/outputs
- 8 analogue inputs/outputs

PROFINET RT

FB33

- Up to 512 digital inputs/outputs
- 32 analogue inputs/outputs

Control block FEC

- Modbus TCP
- Easy-IP
- Interbus, DeviceNet, Profibus DP, CANopen and CC-Link via combination with CPX fieldbus node
- TCP/IP and web connection via Ethernet interface
- Up to 512 inputs/outputs
- Several CP interfaces can be connected
- Ethernet fieldbus slave in remote I/O operating mode (T05)
- Autonomous control of the CPI system as a remote controller (T03)

CPI installation system

Connection options

Fieldbus Direct			
Special feature	Application	Characteristics of Fieldbus Direct	
<p>The Fieldbus Direct product range is the most compact way of connecting valves to a fieldbus. The fieldbus node is directly integrated in the electrical actuation of the valve terminal and therefore takes up only a minimal amount of space.</p>	<p>Fieldbus Direct is a system for the compact connection of a valve terminal to nine different fieldbus standards. The most important fieldbus protocols including Profibus, Interbus, DeviceNet and CANopen are supported. The CP string extension option allows the functions and components of the CPI installation system to be used.</p>	<ul style="list-style-type: none"> Extremely compact and space-saving design Low-cost solution for the connection of a small number of valves to the fieldbus Direct front-end integration with a high degree of protection (IP65) Comprehensive diagnostics and condition monitoring 	<p> - Note</p> <p>The range of functions and combination options of CPV, CPV-SC, CPA-SC, CDVI and MPA valves are described in detail in</p> <ul style="list-style-type: none"> ➔ Internet: type 80 (Valve terminal CPV-SC) ➔ Internet: cpasc (Valve terminal CPA-SC) ➔ Internet: type 15 (Valve terminal CDVI) ➔ Internet: type 10 (Valve terminal CPV) ➔ Internet: type 32 (Valve terminal MPA)

Fieldbus Direct and CP string extension			
<p>The optional string extension allows a further valve terminal and I/O modules to be connected to the Fieldbus Direct fieldbus node.</p> <ul style="list-style-type: none"> A CP string of the CP system is integrated in the fieldbus node as an extension Different input and output modules as well as CPV, CPA and MPA valve terminals can be connected 	<p>The maximum length of the CP string extension is 10 metres, which means that the extension modules can be mounted directly on-site. All of the required electrical signals including load current supply are transmitted via the CP cable, which in turn means that no further installation is needed on the expansion module.</p>	<p>The CP string interface offers:</p> <ul style="list-style-type: none"> Max. 32 input signals Max. 32 output signals for output modules 24 V DC or solenoid coils Logic and sensor supply for the input modules 	<ul style="list-style-type: none"> Load voltage supply for the valve terminals Logic supply for the output modules


CPI installation system

Connection options

FESTO

Fieldbus Direct with CP string extension

CPV valve terminal

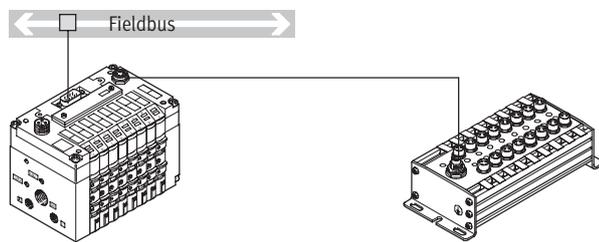


- 4 to 8 valve positions
- DeviceNet
- CANopen
- Profibus DP
- ABB CS31
- Interbus
- Moeller Suconet
- Festo fieldbus
- Beckhoff
- CC-Link
- 4 to 16 solenoid coils

Further information

➔ Internet: type 10

CPA-SC

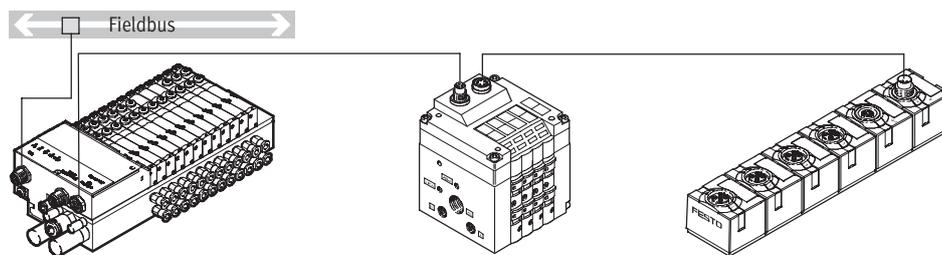


- 4 to 24 valve positions
- DeviceNet connection
- Profibus DP
- 4 to 32 solenoid coils

Further information

➔ Internet: cpasc

CPV-SC

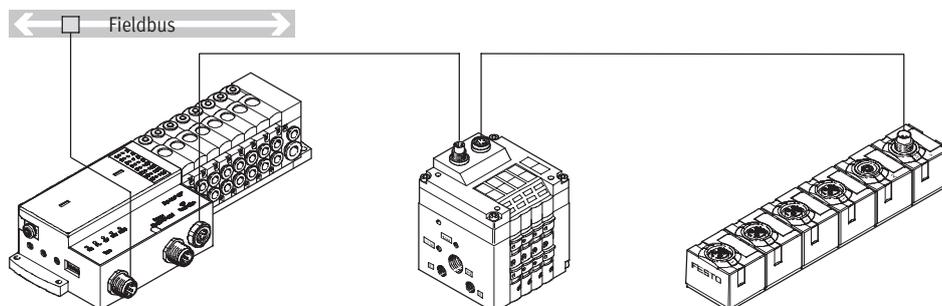


- 4 to 16 valve positions
- DeviceNet connection
- Profibus DP
- 4 to 16 solenoid coils

Further information

➔ Internet: type 80

CDVI-DN

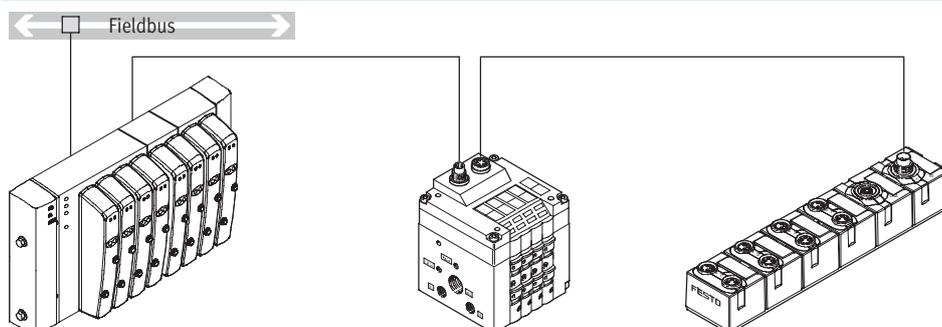

- 4, 6, 8 or 12 valve positions
- DeviceNet connection
- 4 to 24 solenoid coils

Further information

➔ Internet: type 15

CPI installation system


Connection options

Positioning systems		
Application		Properties
<p>The SPC200 is a position controller (closed loop) and positioning control (open loop) in one. Together with the drive, the displacement encoder and the proportional directional control valve, it forms a closed control loop.</p>	<p>The CP interface option enables the functions and components of the CP installation system to be used.</p>	<ul style="list-style-type: none"> • Modular with 9 different plug-in cards • Wide variety with up to 4 positioning axes, stepper motor axes and the option of operating pneumatic and electrical systems • Flexible with set selection for positioning tasks with fixed trajectories and program mode with up to 100 programs • Quick commissioning using the WINPISA diagnostic and programming tool

Positioning systems and CP interface		
<p>The plug-in cards for connecting the axis strings facilitate the connection of further input/output modules:</p> <ul style="list-style-type: none"> • One CP string of the CP system is possible as an extension • Various input and output modules as well as CPV valve terminals can be connected 	<p>The maximum length of the CP string extension is 10 metres, which means that the extension modules can be mounted directly on-site. All of the required electrical signals including load current supply are transmitted via the CP cable, which in turn means that no further installation is needed on the extension module.</p>	<p>The CP string interface offers:</p> <ul style="list-style-type: none"> • 16 input signals • 16 output signals for output modules 24 V DC or solenoid coils • Logic and sensor supply for the input modules • Load voltage supply for the valve terminals • Logic supply for the output modules

Note
 CP input modules can only be connected via a terminating resistor (KZW-M9-R100).


Axis controller SPC200 with CP interface

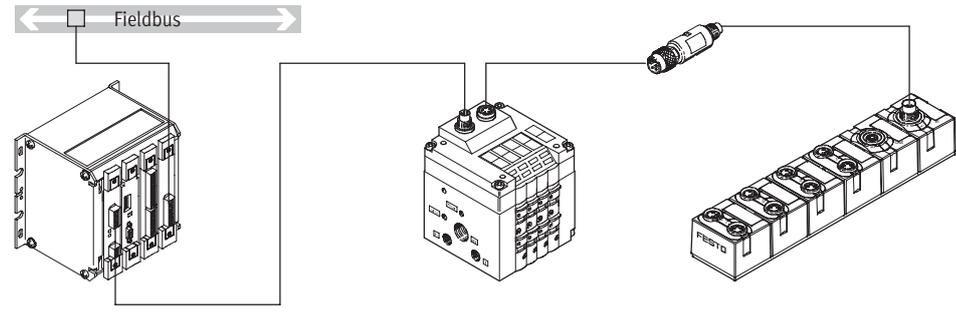

- Max. 64 inputs and 64 outputs via fieldbus
- DeviceNet, Interbus or Profibus connection

Further information
 → Internet: spc200

Compact vision system SBOC-Q/SBOI-Q with CP interface

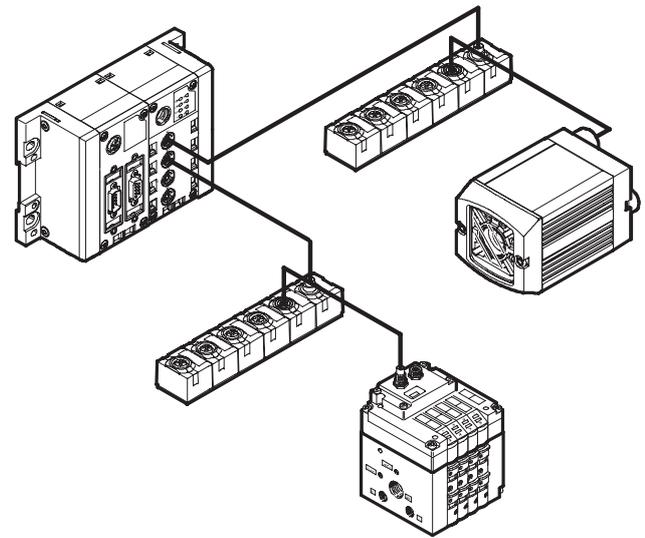

The compact vision system SBOx-Q can be integrated into a Festo CPI network. In this case it functions like a binary module with 16 inputs and outputs. In combination with a CPX-CPI module and a CPX fieldbus, for example, the camera can be accessed via Profibus DP, Interbus, DeviceNet, CANopen and CC-Link.

- Address requirement: 16 digital inputs/outputs
- CPI connection

Further information
 → Internet: sbo


CPI installation system

Connection options



Connection of input and output modules in the CPI installation system

CP connecting cable



KVI-CP-3-...

- - Note

The total length of all CP cables in a CP string must not exceed 10 m.

- Pre-assembled cables for connecting the CP modules
- Lengths from 0.25 to 8 metres
- M9 plug/socket, 5-pin
- Straight/angled version in any combination

Further information
➔ Internet: kvi-cp

CP input/output modules in sturdy, universal and compact design or as a valve terminal

The connection technology for the sensors and additional actuators offers a wide range of digital and analogue input and output modules and is freely selectable – depending on your standard or application:


- M12-5PIN
- M8-3PIN
- M8-4PIN
- Spring-loaded terminal or screw terminal technology

The maximum number of inputs/outputs that can be connected to the individual modules can vary depending on the application. The following module sizes are available:

- Input modules with 8, 16 or 32 channels
- Output modules with 4 or 8 channels
- CPV with 4, 6 or 8 valve slices (max. 16 valves)
- MPA with 2 ... 32 valves
- CPV-SC with 4 ... 16 valves
- CPA with 2 ... 16 valves

Valve terminals with CP interface

CPV valve terminal




CPV10
CPV14
CPV18

- Max. 16 valves in 8 valve slices
- Highly compact and space-saving
- Width 10, 14, 18 mm
- Nominal flow rate 400/800/1600 l/min
- CPV10 and CPV14 with CPI functionality
- CPV18 with CP functionality

Further information
➔ Internet: type 10 (Valve terminal CPV)

MPA valve terminal

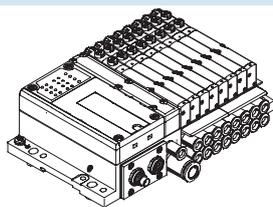


MPA1
MPA2

- Max. 32 valves
- Modular and versatile
- Width 10, 20 mm
- Nominal flow rate 360/700 l/min
- CPI functionality

Further information
➔ Internet: type 32 (Valve terminal MPA)

CPV-SC valve terminal




CPV-SC

- Max. 16 valves
- Extremely compact
- Width 10 mm
- Nominal flow rate 170 l/min
- CPI functionality

Further information
➔ Internet: type 80 (Valve terminal CPV-SC)

CPA valve terminal

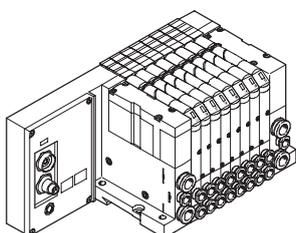

CPA10
CPA14

- Max. 16 valves
- Width 10, 14 mm
- Nominal flow rate 300/600 l/min
- CP functionality

Further information
➔ Internet: type 12 (Valve terminal CPA)

CPI installation system

Key features – Input/output modules

Connection of input and output modules in the CPI installation system

Special features of the CP input/output modules of sturdy design


The sturdy CP input/output modules have a highly resistant aluminium housing and its internal electronic components can be repaired or replaced.

As a CP-E...Z or output modules they have a separate load voltage supply, which means less load on the CP interface and CP cable and more power for

the connected consuming devices. This also facilitates separate disconnection of the consuming devices.

High degree of protection (IP65), surpassed only by the compact CP modules with IP65/67 protection. The only exception is the IP20 protection offered by the module with clamped terminal connection for installation in control cabinets.


CP input modules of sturdy design

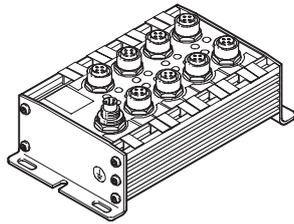

CP-E16-M12x2-5POL
CP-E16N-M12x2

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display
- CP functionality


- M12 plug, double allocation
- 1x M9 CP connection
- PNP/NPN, IP65

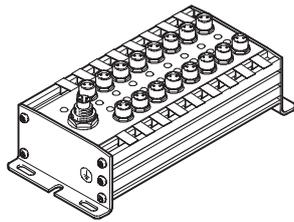

CP-E16-M8
CP-E16N-M8

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display
- CP functionality

- M8 plug, single allocation
- 1x M9 CP connection
- PNP/NPN, IP65

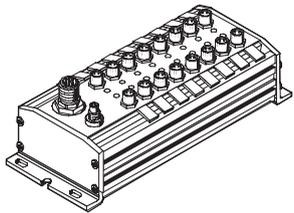


CP-E16-M8-Z

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display
- CP functionality

- Galvanic isolation through additional power supply
- M8 plug, single allocation
- 1x M9 CP connection
- Separate sensor supply
- PNP/NPN, IP65

CP output modules of sturdy design

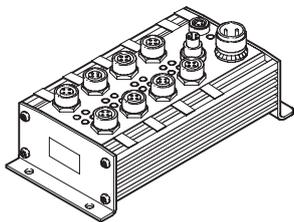

CP-A08-M12-5POL
CP-A08N-M12

- 8 outputs 24 V DC
- Output signal display via 8 LEDs
- Operating status display
- M12 plug, single allocation
- CP functionality

- 2x M9 CP connection
- Separate load voltage
- Outputs resistant to overloads and short circuits
- PNP/NPN, IP65

CPI installation system

Key features – Input/output modules

Connection of input and output modules in the CPI installation system

Special features of the CP input/output modules of economical design

In addition to the sturdy CP input/output modules and the compact CP input/output modules, there are also the economical modules with the design features of the compact modules, but with a greater number of inputs/outputs.


The economical CP modules feature a compact design, coupled with a large number of inputs/outputs. The modules can be used in connection with the following valve terminals:
– CPV, MPA, CPV-SC, CPA-SC, CDVI, CPA

Application:

- Same function, configuration and commissioning as sturdy or compact CP modules
- Integrated H-rail mounting and earthing plate
- Centrally placed status and diagnostic LEDs
- The economical CP modules and the other CP modules can be operated together on a string

- The maximum number of modules per CP string is as follows:
 - CPI system: max. 4 modules or max. 32 inputs and 32 outputs
 - CP system: one valve terminal/output module and one input module


CP input modules of economical design

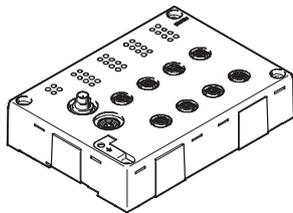

CP-E16-M12-EL

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display (per module and per group of four inputs)
- CPI functionality


- 8x M12 plug, 5-pin, double allocation
- 2x M9 CP connection
- PNP, IP65

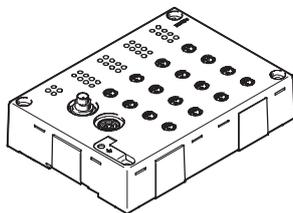

CP-E16-M8-EL

- 16 inputs 24 V DC
- Signal status display via 16 LEDs
- Operating status display (per module and per group of four inputs)
- CPI functionality

- 16x M8 plug, 3-pin, single allocation
- 2x M9 CP connection
- PNP, IP65

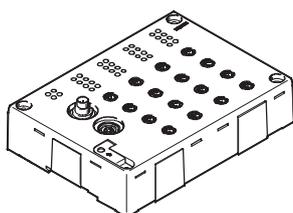


CP-E32-M8-EL

- 32 inputs 24 V DC
- Signal status display via 32 LEDs
- Operating status display (per module)
- CPI functionality

- 16x M8 plug, 4-pin, double allocation
- 2x M9 CP connection
- PNP, IP65

CP output modules of economical design

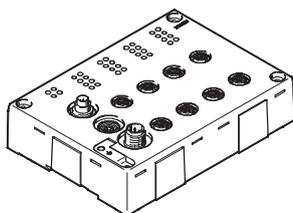

CP-A08-M12-EL-Z

- 8 outputs 24 V DC
- Signal status display via 4 LEDs
- Operating status display (per module and per channel/output)
- CPI functionality

- 8x M12 plug, 5-pin, double allocation
- 2x M9 CP connection
- Outputs resistant to overloads and short circuits
- PNP, IP65

CPI installation system

Key features – Input/output modules

Connection of input and output modules in the CPI installation system

Special features of the CP input/output modules of compact design

In addition to the sturdy and economical CP input/output modules, there is also the compact series of CP input/output modules. These have an optimised, compact design, are made from plastic and are very light. They are, of course, available with the high degree of protection IP65/67 (exception: terminal modules in IP20 for installation in a protected fitting space).

The compact CP modules are designed for use in handling and assembly wherever space requirements and product weight play a role.

The modules can be used in connection with the following valve terminals:


- CPV, MPA, CPV-SC, CPA-SC, CDVI, CPA

Application:

- The modules can be positioned closer to the actuators thanks to the smaller dimensions
- Same function, configuration and commissioning as sturdy or economical CP modules
- The compact CP modules and the other CP modules can be operated together on a string

- The maximum number of modules per CP string is as follows:
 - CPI system: max. 4 modules or max. 32 inputs and 32 outputs
 - CP system: one valve terminal/output module and one input module


CP input modules of compact design

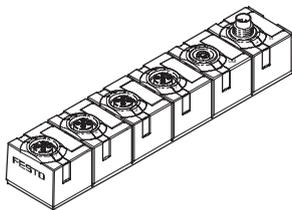

CP-E08-M12x2-CL

- 8 inputs 24 V DC
- Signal status display via 8 LEDs
- Operating status display
- CPI functionality


- 4x M12 plug, 5-pin, double allocation
- 2x M9 CP connection
- PNP, IP65/67

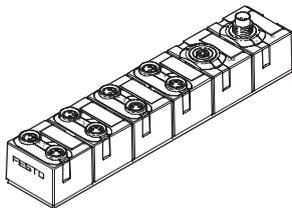

CP-E08-M8-CL

- 8 inputs 24 V DC
- Signal status display via 8 LEDs
- Operating status display
- CPI functionality

- 8x M8 plug, 3-pin, single allocation
- 2x M9 CP connection
- PNP, IP65/67

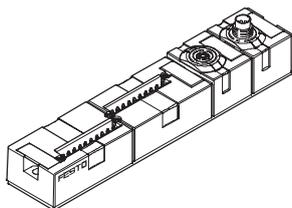


CP-E16-KL-CL

- 16 inputs 24 V DC
- Indirect signal status display via LEDs in the connection set of the tension-spring socket
- Operating status display
- CPI functionality

- Screw terminal or tension-spring sockets
- 2x M9 CP connection
- PNP, IP20

CP output modules of compact design

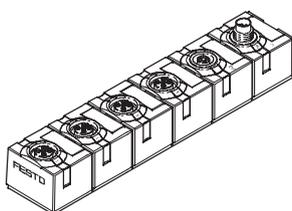

CP-A04-M12x2-CL

- 4 outputs 24 V DC
- Signal status display via 4 LEDs
- Operating status display
- CPI functionality


- 4x M12 plug, 5-pin, double allocation
- 2x M9 CP connection
- Outputs resistant to overloads and short circuits
- PNP, IP65/67

CPI installation system

Key features – Mounting options

H-rail mounting

CP interface

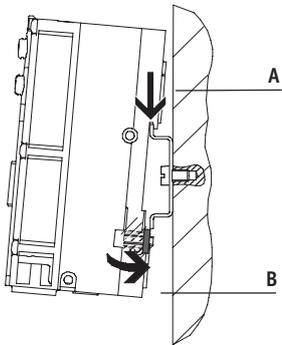

The H-rail mounting is formed in the reverse profile of the CPX interlinking blocks. The CPX terminal can be attached to the H-rail using the H-rail mounting.


The CPX terminal is attached to the H-rail as follows (see arrow A). It is first swivelled on the H-rail and then secured in place with the clamping component (see arrow B).

The following mounting kit is required for H-rail mounting (plus mounting kit for optionally mounted valves):

- CPA-BG-NRH

This enables mounting on H-rails to EN 60715.

Economical CP modules

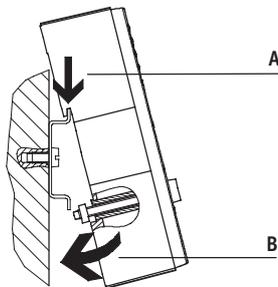

The H-rail mounting is impressed in the reverse profile of the economical CP modules. The modules can be attached to the H-rail using the H-rail mounting.


The module is attached to the H-rail as follows (see arrow A). It is first swivelled on the H-rail and then secured in place with the clamping component (see arrow B).

The scope of delivery includes the following mounting kit for H-rail mounting:

- CP-EL-HS

This enables mounting on H-rails to EN 60715.

Compact and sturdy CP modules

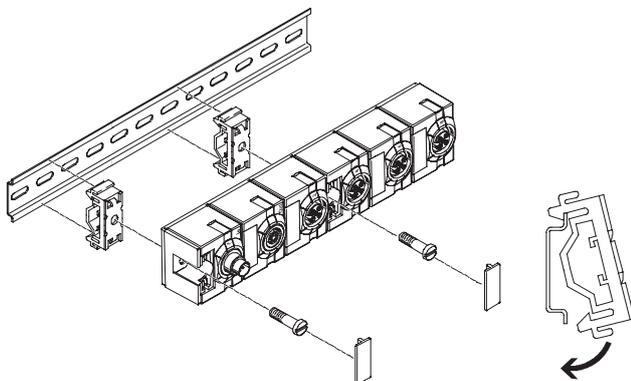

For the CP modules there is a mounting kit that can be used on an H-rail. On the compact CP modules, the mounting holes are covered by inscription labels.

The following mounting kit is required for H-rail mounting:

- CP-TS-HS35

This enables mounting on H-rails to EN 60715.


CPI installation system

Key features – Mounting options

FESTO

Wall mounting

CP modules

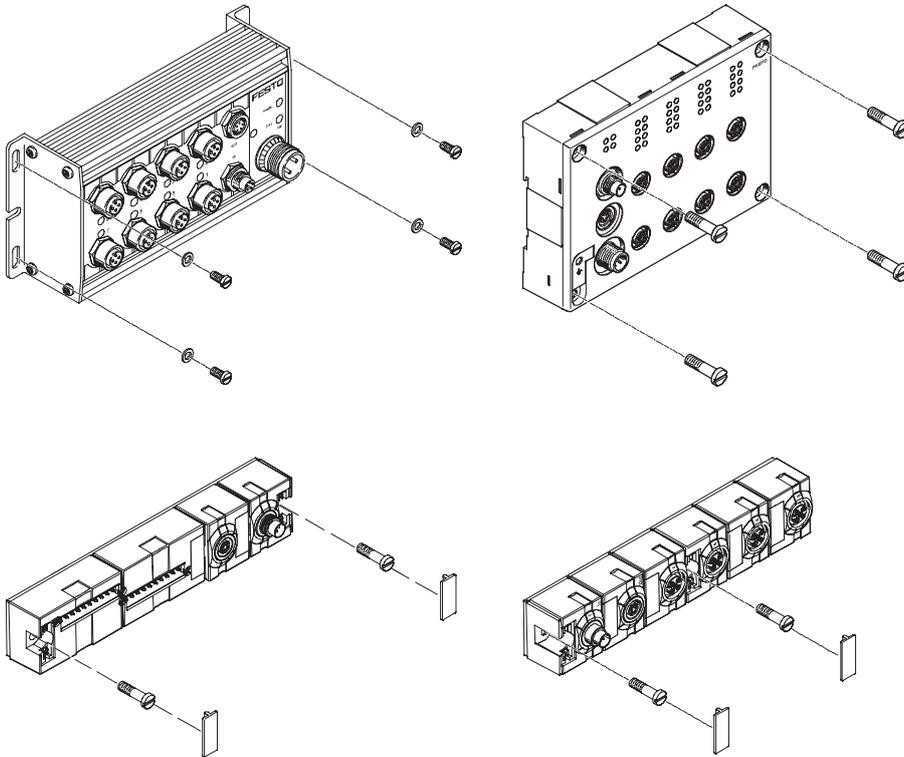

The CP modules (with screws up to 4 mm in diameter) can be mounted on even surfaces in almost any position using the mounting holes.

-  - Note

The mounting holes on the compact CP modules are covered by inscription labels.

CPI installation system

Key features – Inscription system


Inscription system

All CP modules have holders for inscription labels.

Inscription labels/holders are not included in the scope of delivery and can be ordered separately.

The labels can be pre-assembled on request.


Robust CP modules

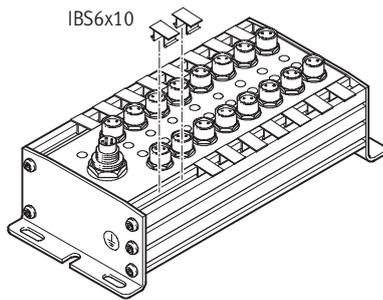

The sturdy CP modules have two slots in which the inscription labels IBS6x10 (Part No. 18 576) can be fitted. At least one inscription label can be fitted per connection.

The IBS6x10 are plastic clips that can be printed on, written on or affixed with labels.

Economical CP modules

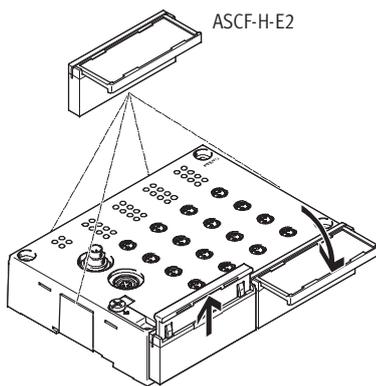


The economical CP modules have six lateral fixtures for one inscription label holder ASCF-H-E2 each (Part No. 547 473).

The ASCF-H-E2 are transparent hinged label holders for holding pre-assembled paper inscription labels.

The label can be read when the label holder is opened out.

Compact CP modules

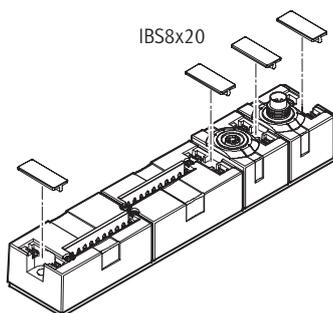

The compact CP modules have a holder for an inscription label IBS8x20 (Part No. 539 388) for each connection.

The IBS8x20 are plastic clips that can be printed on, written on or affixed with labels.

CPI installation system

Key features – Power supply

Operating voltage and load current supply

The following functions are made available to the connected modules through the CP cable:

- Connection for data exchange
- Operating voltage for internal electronics
- Load current supply for the connected inputs/sensors and/or outputs/actuators

CP-E...Z or output modules from the sturdy and the economical series have a separate load voltage supply:

- Less load on the CP interface and CP cable
- 0.5 A per output (max. 4 A supply per output module)
- 1 A per 8 inputs
- Separate disconnection of the consuming devices possible


Every module in the CPI system is protected separately against overload with electronic fuses.

The input modules without additional supply provide a maximum sensor supply of 500 mA in the sturdy design, 800 mA in the compact design and

700 mA in the economical design with 16 inputs and 1400 mA with 32 inputs.

The input modules with additional supply provide up to 2 A residual current for the connected sensors.

Example of circuits for additional power supply

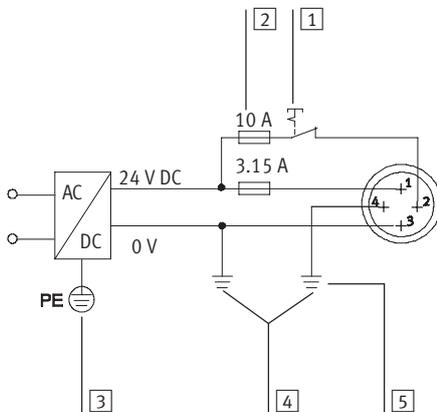

- 1 Load voltage supply (can be disconnected separately)
- 2 External fuses
- 3 Protective earth
- 4 Equipotential bonding
- 5 Earth terminal on pin 4, rated for 12 A

Pin allocation of plug for additional power supply

Pin allocation	Pin	Signal	Designation
	1	24 V DC	Supply for electronics and inputs
	2	24 V DC	Load supply for valves/outputs
	3	0 V	Equipotential bonding
	4	0 V	Earth terminal and equipotential bonding, rated for 12 A


CPI installation system

Key features – Power supply



Power supply concept of the CPX terminal

Circuit diagram for M18 power supply/system supply (example)

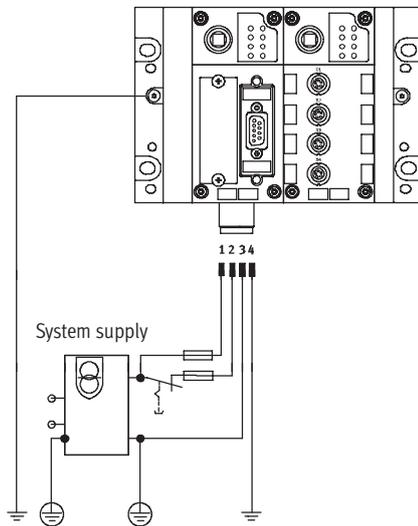

The use of decentralised devices on the fieldbus – particularly with high protection for direct machine mounting – demands a flexible power supply concept. The CPX terminal facilitates the connection of all voltages via one socket.

A distinction is made between supply for

- electronics and sensors/inputs
- valves
- actuators/outputs

Selectable connecting thread:

- M18
- 7/8"

Note

The CP interface connects the 0 V of the power supply for the electronics/inputs and the valves. To prevent overloads, the power must therefore

be supplied using just one power supply module or using power supply units with a common earthed conductor.

Pin allocation of plug for additional power supply

Pin allocation for M18 – 4-pin	Pin	Signal	Designation
	1	24 V DC	Supply voltage for electronics and inputs
	2	24 V DC	Load voltage supply for valves and outputs
	3	0 V	Neutral conductor
	4	FE	Earth terminal
Pin allocation for 7/8" – 4-pin	Pin	Signal	Designation
	A	24 V DC	Supply voltage for electronics and inputs
	B	24 V DC	Load voltage supply for valves and outputs
	C	FE	Earth terminal
	D	0 V	Neutral conductor
Pin allocation for 7/8" – 5-pin	Pin	Signal	Designation
	1	0 V	Neutral conductor for valves and outputs
	2	0 V	Neutral conductor for electronics and sensors
	3	FE	Earth terminal
	4	24 V DC	Supply voltage for electronics and inputs
	5	24 V DC	Load voltage supply for valves and outputs

Interlinking blocks

Many applications require segmenting of the voltage into zones. This is true in particular of the separate disconnection of connected actuators (solenoid coils/outputs).

The separation of voltages for valves and the realisation of different voltage segments for electrical outputs and sensors are supported by the different

interlinking blocks of the CPX terminal:

- With system supply
- Without power supply
- With additional power supply for electrical outputs
- With additional power supply for valves

The supply voltages are supplied using a

- 4-pin M18 plug
- 4-pin 7/8" plug
- 5-pin 7/8" plug

Note

The max. current is limited to 12 A with the 7/8" system supply. When using a conventional pre-assembled cable, the max. current is limited to 8 A.


CPI installation system

Key features – Diagnostics

General limits			
System supply	CP interface		
<p>The system supply provides the internal voltage for the entire CPX system with</p> <ul style="list-style-type: none"> • max. 16 A for electronics and sensors/inputs • max. 16 A for actuators/outputs and valves 	<p>The CP interface and the CP modules connected to the CP interface get their operating voltage from the connection for electronics and sensors/inputs.</p>	<p>The operating voltage for the sensors/actuators connected to the CP modules is supplied from the voltage for valves. The CP interface supplies the</p>	<p>connected CP modules with</p> <p>The CP interface supplies the connected CP modules with</p> <ul style="list-style-type: none"> • max. 1.6 A per CP string

Diagnostics			
General information	Diagnostics via LED	Diagnostics via control program/CPX-MMI	
<p>A comprehensive diagnostic function is available for each string.</p> <p>The diagnostic information can either be detected via the LEDs on the module and then read out and evaluated via the controller software (non-field-bus-specific) or displayed directly on the CPX terminal via the CPX-MMI and then evaluated and edited.</p>	<ul style="list-style-type: none"> • Error in bus communication • POWER, power supply display for internal electronics • POWER V, load voltage display for valves • 0 ... 3, CP string allocation changed or interrupted <p>There are also bus-specific LED displays.</p>	<ul style="list-style-type: none"> • Configuration error • Bus error • Operating voltage failure • Falling below voltage tolerance (valves) • Short circuit in sensor voltage supply 	<ul style="list-style-type: none"> • Operating voltage failure at the output modules • Short circuit/overload at the output modules • Connection to one or more CP modules interrupted (valve terminal, input/output modules)

Diagnostics via CPX terminal

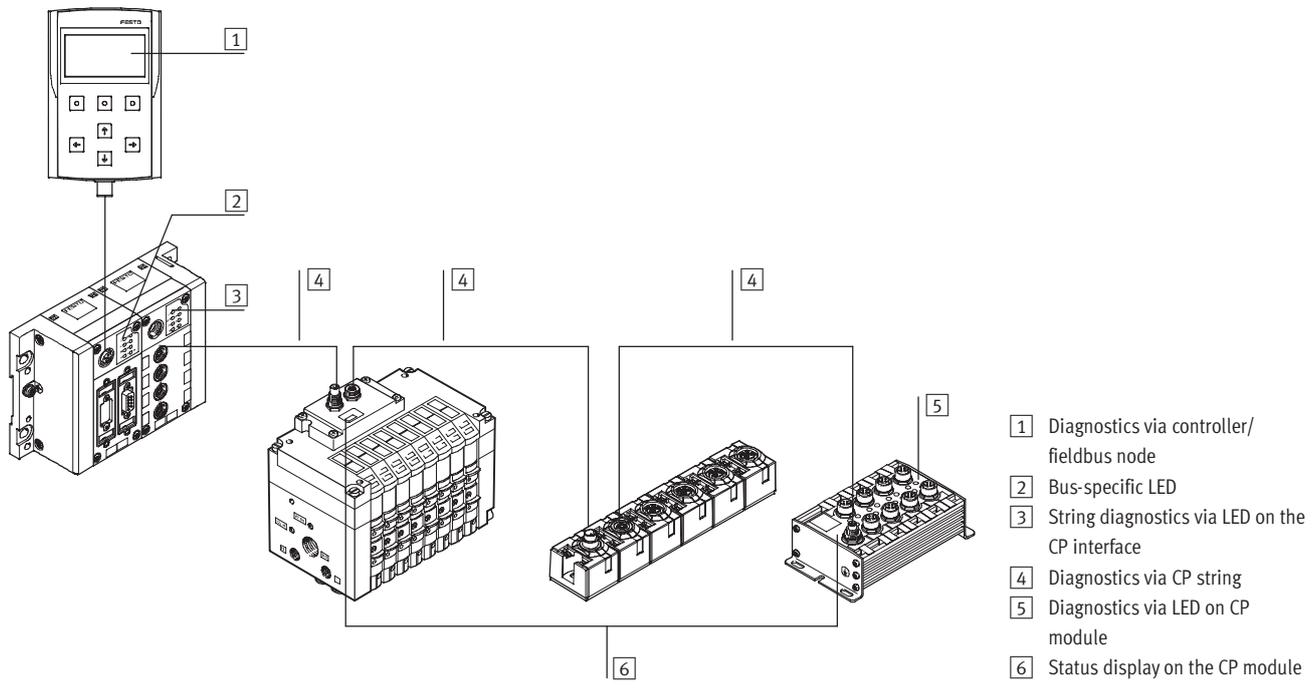

- 1 Diagnostics via controller/fieldbus node
- 2 Bus-specific LED
- 3 String diagnostics via LED on the CP interface
- 4 Diagnostics via CP string
- 5 Diagnostics via LED on CP module
- 6 Status display on the CP module


CPI installation system

Key features – CP interface




Diagnostics

Diagnostics via CP fieldbus node

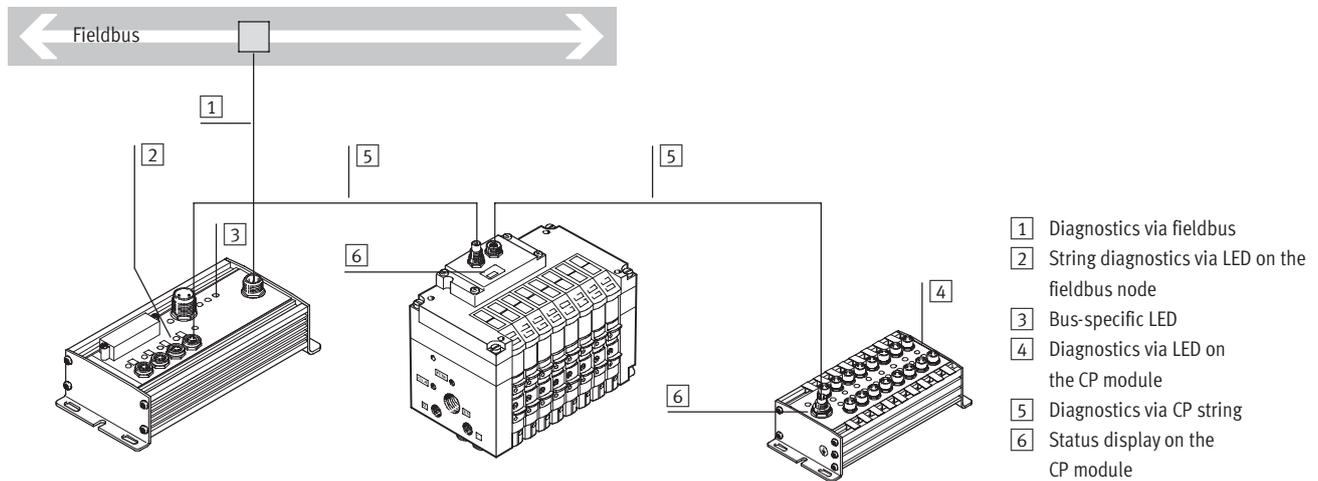

Diagnostic LEDs on the CP modules

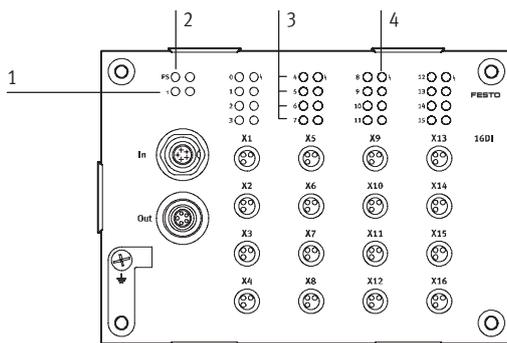

- 1 Status LED for CP communication (PS, green)
- 2 Status LED (module) for short circuit/overload of sensor supply (red)
- 3 Status LEDs for inputs (status display, green)
- 4 Status LED (group, only with CP-E16-...-EL) for short circuit/overload of sensor supply (red)

In addition to the status display per module and per individual channel/ input, the economical modules with 16 inputs additionally have a status display for a group of four inputs. The following inputs are combined into groups of four:

- 0 ... 3
- 4 ... 7
- 8 ... 11
- 12 ... 15

Parameterisation

Allocation of the addresses to the individual actuators/outputs or sensors/inputs connected to the CP modules is performed in accordance with the fieldbus node or CPX-FEC used (exception: Interbus node). Address allocation is performed in accordance with the following rules:

- One CP interface provides four strings with a total of 128 inputs and 128 output addresses.
- A used string occupies 32 inputs and 32 output addresses.
- The addresses are permanently allocated to the strings and CP modules in ascending order.
- Unused address space remains reserved for future extensions.

The CP interface checks the configuration of the connected modules each time the system is switched on and during operation. If a deviation from the saved configuration is detected, an appropriate message is output via the controller software and displayed via LED. The configuration detected is stored by pressing the Save button (after the operating voltage is switched on at the CP interface).

The configuration is stored each time the CP interface is switched off and back on. The option is provided of replacing a connected CP module with a module of identical design during operation. Removal of more than one module from the current configuration will be detected as an error; the address spaces of these modules will no longer be actuated.

CPI installation system

Selection aid



System selection aid					
	Modules per string	Outputs/inputs per string	Modules with CP functionality	Modules with CPI functionality	String length [m]
CP system	2	16/16	0 ... 1 input module 0 ... 1 output module	0 ... 1 input module 0 ... 1 output module	0 ... 10
CPI system	4	32/32	0 ... 1 input module 0 ... 1 output module	0 ... 4 input modules 0 ... 4 output modules	0 ... 10


Module selection aid							
	Functionality		Additional power supply	Address requirement		Max. current consumption [A]	→ Page/Internet
	CP	CPI		Inputs	Outputs		
Input modules							
CP-E16-M8	■	–	–	16	–	0.54	47
CP-E16N-M8	■	–	–	16	–	0.59	47
CP-E16-M12x2-5POL	■	–	–	16	–	0.59	47
CP-E16N-M12x2	■	–	–	16	–	0.59	47
CP-E16-M8-Z	■	–	■	16	–	1.04	47
CP-E32-M8-EL	–	■	–	32	–	1.4	53
CP-E16-M8-EL	■	■	–	16	–	0.7	53
CP-E16-M12-EL	■	■	–	16	–	0.7	53
CP-E08-M12-CL	■	■	–	8	–	0.835	59
CP-E08-M8-CL	■	■	–	8	–	0.835	59
CP-E16-KL-CL	■	■	–	16	–	0.835	59
Output modules							
CP-A08-M12-5POL	■	–	■	–	8	2.09	65
CP-A08N-M12	■	–	■	–	8	2.09	65
CP-A08-M12-EL-Z	■	■	■	–	8	4	69
CP-A04-M12-CL	■	■	–	–	4	1.035	73
Connecting cables							
KVI-CP-3-...	■	■	–	–	–	1.6	kvi-cp
Valve terminals							
CPV10-FB-4	■	■	–	–	16	0.327	type 10
CPV10-FB-6	■	■	–	–	16	0.465	type 10
CPV10-FB-8	■	■	–	–	16	0.604	type 10
CPV14-FB-4	■	■	–	–	16	0.419	type 10
CPV14-FB-6	■	■	–	–	16	0.603	type 10
CPV14-FB-8	■	■	–	–	16	0.788	type 10
CPV18-FB-4	■	■	–	–	16	0.624	type 10
CPV18-FB-6	■	■	–	–	16	0.911	type 10
CPV18-FB-8	■	■	–	–	16	1.197	type 10
CPA10	■	–	–	–	16	0.31	type 12
CPA14	■	–	–	–	16	0.5	type 12
MPA	–	■	■	–	32	3.25	type 32
CPV-SC	–	■	–	–	16	0.875	type 80

CPI installation system

Selection aid

Accessory selection aid

Connection M8, 3-pin

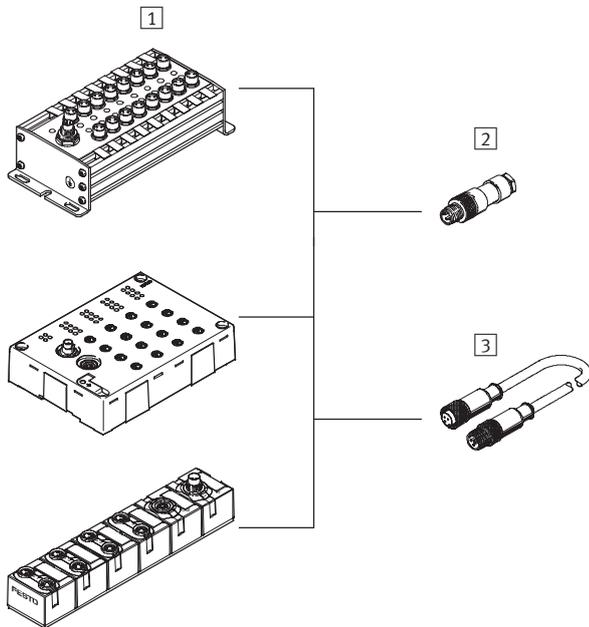

Note

Festo delivers pre-assembled M8/M12 connecting cables (NEBU modular system) on customer request:

- application tailored
- perfectly fitting
- installation saving

1 Input modules
Type
CP-E16-M8
CP-E16N-M8
CP-E16-M8-Z
CP-E16-M8-EL
CP-E08-M8-CL

Plug connector/connecting cable	
Type	Connection technology
2 Plug connector	
SEA-GS-M8	Solder lug
SEA-3GS-M8-S	Screw terminal
3 Connecting cable	
KM8-M8-GSGD-...	Socket M8, 3-pin
NEBU-...-M8G3	Socket M5, 3-pin
	Socket M8, 3-pin
	Socket M8, 4-pin
	Socket M12, 5-pin
	Open cable end


CPI installation system

Selection aid



Accessory selection aid

Connection for inputs M8, 4-pin

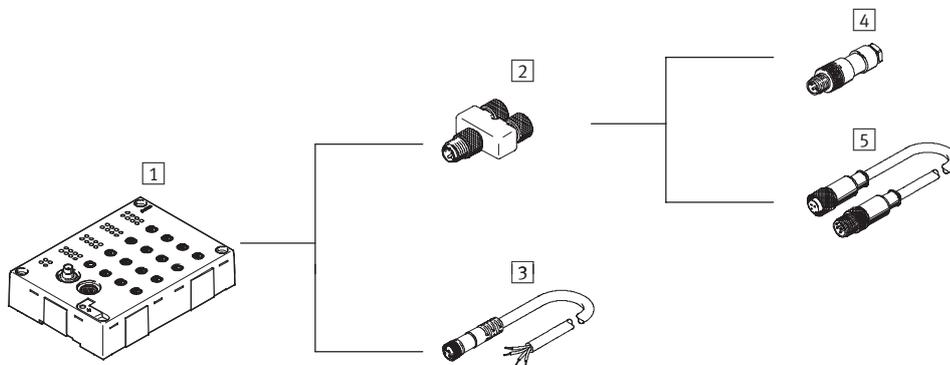

- Note
Festo delivers pre-assembled M8/M12 connecting cables (NEBU modular system) on customer request:

- application tailored
- perfectly fitting
- installation saving

1 Input modules	
Type	
CP-E32-M8-EL	

Plug connector/connecting cable	
Type	Connection technology
2 T-adapter	
NEDU-M8D3-M8T4	2x socket M8, 3-pin
3 Connecting cable	
NEBU-...-M8G4	Socket M5, 3-pin
	Socket M8, 3-pin
	Socket M8, 4-pin
	Socket M12, 5-pin
	Open cable end

Plug connector/connecting cable		
Connection technology	Type	Connection technology
4 Plug connector		
Plug M8, 3-pin	SEA-GS-M8	Solder lug
Plug M8, 3-pin	SEA-3GS-M8-S	Screw terminal
5 Connecting cable		
Plug M8, 3-pin	KM8-M8-GSGD-...	Socket M8, 3-pin
Plug M8, 3-pin	NEBU-...-M8G3	Socket M5, 3-pin
		Socket M8, 3-pin
		Socket M8, 4-pin
		Socket M12, 5-pin
		Open cable end


CPI installation system

Selection aid

FESTO

Accessory selection aid

Connection for inputs M12, 4-pin

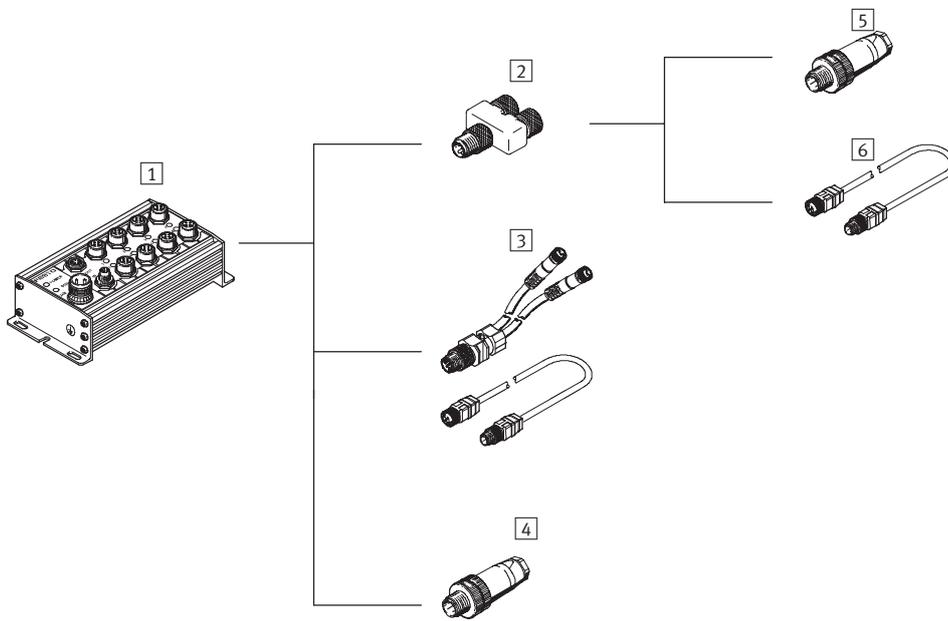

Note
Festo delivers pre-assembled M8/M12 connecting cables (NEBU modular system) on customer request:

- application tailored
- perfectly fitting
- installation saving

1 Input modules
Type
CP-E16N-M12x2

Plug connector/connecting cable	
Type	Connection technology
2 T-adapter	
NEDU-M12D5-M12T4M	2x socket M12, 4-pin
3 Connecting cable	
KM12-DUO-M8-...	2x socket M8, 3-pin
KM12-M12-...	Socket M12, 4-pin
4 Plug connector	
SEA-GS-7	Screw terminal
SEA-4GS-7-2,5	Screw terminal
SEA-GS-11-DUO	Screw terminal

Plug connector/connecting cable		
Connection technology	Type	Connection technology
5 Plug connector		
Plug M12, 4-pin	SEA-GS-7	Screw terminal
Plug M12, 4-pin	SEA-4GS-7-2,5	Screw terminal
6 Connecting cable		
Plug M12, 4-pin	KM12-M12-...	Socket M12, 4-pin


CPI installation system

Selection aid



Accessory selection aid


Connection for inputs M12, 5-pin

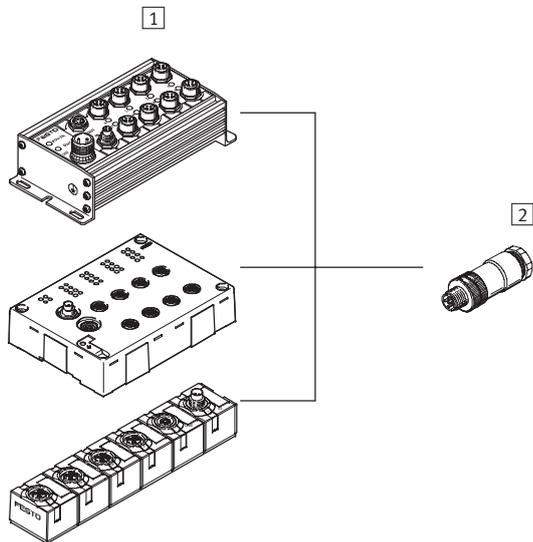

1 Input modules
Type
CP-E16-M12x2-5POL
CP-E16N-M12-EL
CP-E08-M12-CL

2 Plug connector	
Type	Connection technology
SEA-M12-5GS-PG7	Screw terminal
SEA-5GS-11-DUO	Screw terminal

Connection for inputs, tension-spring socket

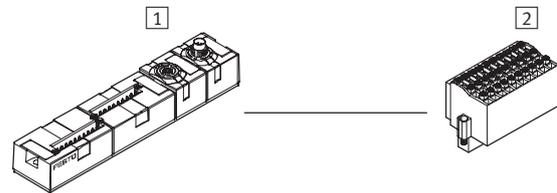

1 Input modules
Type
CP-E16-KL-CL

2 Plug connector	
Type	Connection technology
PS1-SAC31-30POL+L ED	Screw-in tension- spring socket


CPI installation system

Selection aid


FESTO

Accessory selection aid

Connection for outputs M12, 4-pin

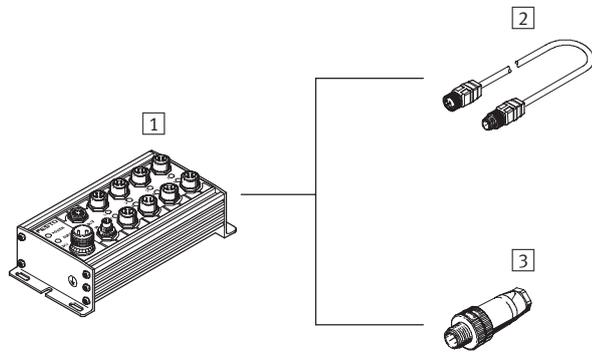

Connection for outputs M12, 5-pin

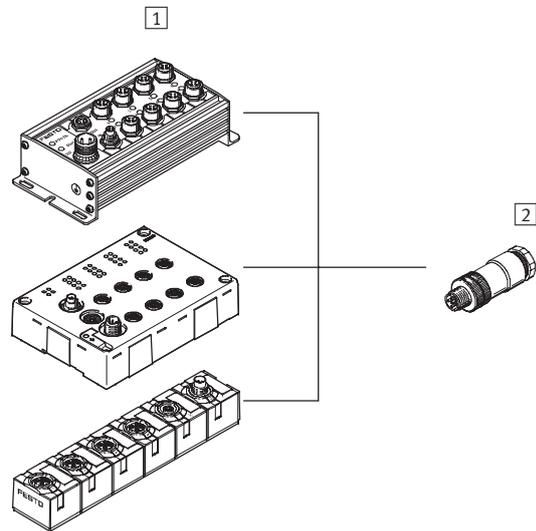

1 Output modules
Type
CP-A08N-M12

Plug connector/connecting cable	
Type	Connection technology
2 Connecting cable	
KM12-M12-...	Socket M12, 4-pin
3 Plug connector	
SEA-GS-7	Screw terminal
SEA-4GS-7-2,5	Screw terminal

1 Output modules
Type
CP-A08-M12-5POL
CP-A08-M12-EL-Z
CP-A04-M12-CL

2 Plug connector	
Type	Connection technology
SEA-M12-5GS-PG7	Screw terminal
SEA-5GS-11-DUO	Screw terminal

CPI installation system

Technical data – Fieldbus node CP-FB05-E

FESTO

FESTO

MOELLER 

ABB


This fieldbus node handles communication between the decentralised CP system and a higher-order master. The fieldbus node is a slave station on the fieldbus and represents the I/O data and diagnostic information of the connected CP modules on the network.

For the electrical peripherals, this module provides the separate electrical system supply for

- the electronics modules and sensor supply, and
- the load current of the valves.

The FB5 fieldbus node supports three different company-specific fieldbus protocols, based on a floating RS485 connection. The required protocol is selected by means of switch settings.

- Festo fieldbus
- ABB CS31
- Moeller SUCONET K

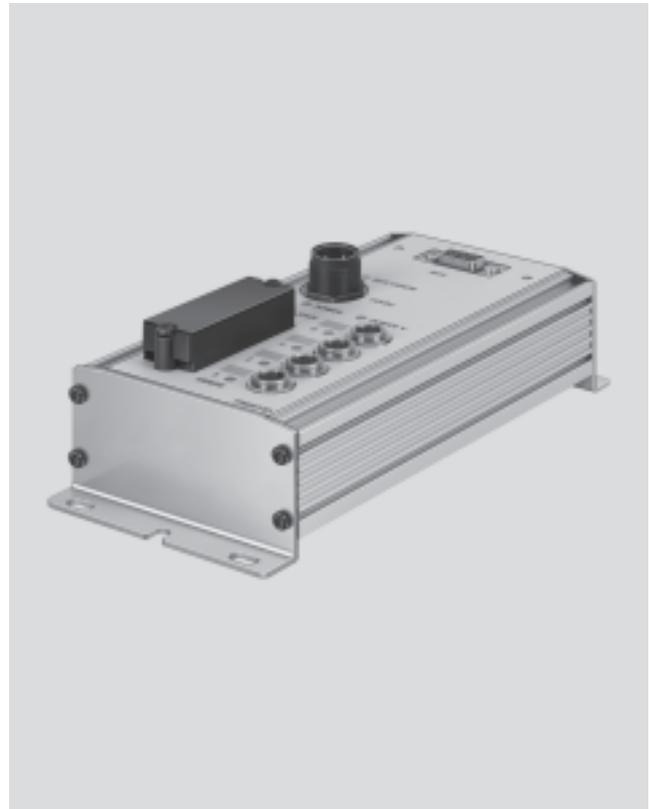

Application

Bus connection

The bus connection on the FB5 is established by means of a 9-pin Sub-D plug. In the case of operation on the fieldbus, the incoming control signals from the node via the fieldbus are permanently forwarded to the connected

CP modules. The CP modules ensure that the programmed output signals are present or switch the relevant valves.

 - Note

Alternatively the bus connection can be established via a 2x M12 adapter plug (B-coded).

Implementation

The FB5 supports the digital input and output modules and the solenoid coils. It can service a total of

64 digital outputs, of which max. 4x 16 can include solenoid coils, and 64 digital inputs.

 - Note

Please observe the general guidelines on I/O addressing when assigning the outputs.

CPI installation system

Technical data – Fieldbus node CP-FB05-E




General technical data		
Type		CP-FB05-E
Part No.		18238
Baud rates	Festo fieldbus	Set using HW switch <ul style="list-style-type: none"> • 31.25 kbps • 62.50 kbps • 187.50 kbps • 375 kbps
	ABB CS31	187.50 kbps
	Moeller SUCONET K	Baud rate set automatically <ul style="list-style-type: none"> • 187.50 kbps • 375 kbps
Addressing range	Festo fieldbus	1 ... 98
	ABB CS31	0 ... 60
	Moeller SUCONET K	1 ... 98
Type of communication	Festo fieldbus	Cyclic polling
	ABB CS31	I16, O16 or I/O16
	Moeller SUCONET K	Up to 32 I/O: SIS-K-06/07 Up to 64 I/O: SIS-K-10/10
Max. no. of solenoid coils		64
Max. no. of outputs incl. solenoid coils		64
Max. no. of inputs		64
LED diagnostic indicators	Power	Power supply indicator for internal electronics
	Power V	Power supply indicator for valves
	0...3	CP string LED
	Bus	Bus error status
Device-specific diagnostics transmitted to the controller		<ul style="list-style-type: none"> • Short circuit/overload of outputs • Undervoltage of valves • Undervoltage of outputs • Undervoltage of sensor supply
Operating voltage	Nominal value	24 V DC polarity-safe
	Permissible range	20.4 ... 26.4 V
	Power failure buffering	20 ms
Current consumption pin 1	Fieldbus node	250 mA
	CP modules	560 mA (internal electronics) + total current consumption of inputs
Current limiting	Electronics of fieldbus node and CP connection	Max. 1.25 A, short circuit proof
Load voltage pin 2	Solenoid valves	Total of all valves switched simultaneously, see technical data on CP valves → Internet: type 10 and Internet: type 12 Compact Performance valve terminals CPV and CPA
Current limiting	Supply for solenoid valves	Max. 2.5 A, fused
Approval		CE
Protection class to EN 60 529		IP65
Temperature range	Operation	-5 ... +50 °C
	Storage	-20 ... +70 °C
Materials	Housing	Die-cast aluminium
Dimensions (LxWxD)		196.4 x 88 x 61.5 mm
Weight		925 g

CPI installation system

Technical data – Fieldbus node CP-FB05-E

Connection and display components

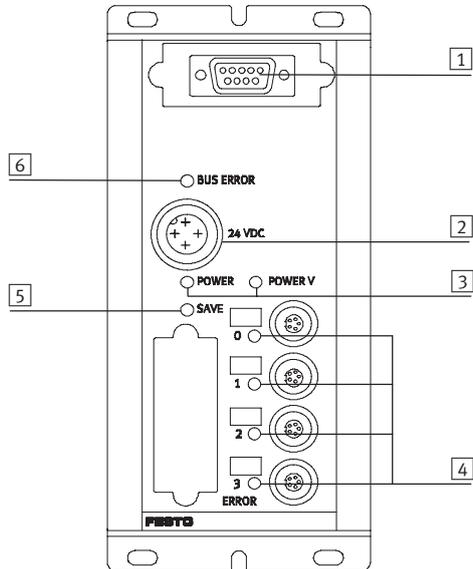

- 1 Plug for fieldbus cable
- 2 Operating voltage connection for CP and valves
- 3 Operating voltage LEDs
- 4 String LEDs
- 5 Save key
- 6 Bus-specific LED



Pin allocation for fieldbus interface (plug view)

Plug view	Pin	Signal	Festo Sub-D plug (IP65)	Manufacturer-specific signal designation				Designation
				Festo fieldbus interface	ABB CS31	Moeller SUCONET K		
						Sub-D, 9-pin	DIN (round), 5-pin	
	1	n.c.						Not connected
	2	n.c.						Not connected
	3	RxD/TxD-P	B	S+	Bus1	3 (T _A /R _A)	4 (T _A /R _A)	Received/transmitted data P
	4	CNTR-P						Repeater control signal
	5	DGND						Data reference potential
	6	VP						Supply voltage
	7	n.c.						Not connected
	8	RxD/TxD-N	A	S-	Bus2	7 (T _B /R _B)	1 (T _B /R _B)	Received/transmitted data N
	9	n.c.						Not connected
	Housing			Cable clip	Screen	Screen	4 (screen)	Housing

CPI installation system

Accessories – Fieldbus node CP-FB05-E

FESTO

Ordering data				
Designation			Type	Part No.
Power supply				
	Power supply socket, straight M18x1, 4-pin	for 1.5 mm ²	NTSD-GD-9	18493
		for 2.5 mm ²	NTSD-GD-13,5	18526
	Power supply socket, angled M18x1, 4-pin	for 1.5 mm ²	NTSD-WD-9	18527
		for 2.5 mm ²	NTSD-WD-11	533119
Fieldbus connection				
	Fieldbus socket, Sub-D connection		FBS-Sub-9-GS-DP-B	532216
	M12 adapter		FBA-2-M12-5POL-RK	533118
Valve terminal connection				
	Connecting cable WS-WD	0,25 m	KVI-CP-3-WS-WD-0,25	540327
		0,5 m	KVI-CP-3-WS-WD-0,5	540328
		2 m	KVI-CP-3-WS-WD-2	540329
		5 m	KVI-CP-3-WS-WD-5	540330
		8 m	KVI-CP-3-WS-WD-8	540331
			Connecting cable GS-GD	2 m
5 m	KVI-CP-3-GS-GD-5			540333
8 m	KVI-CP-3-GS-GD-8			540334
Mounting				
	Mounting for H-rail		CP-TS-HS35	170169
User documentation				
	User documentation – Bus node CP-FB5-E	German	P.BE-CP-FB5-E-DE	165105
		English	P.BE-CP-FB5-E-EN	165205
		French	P.BE-CP-FB5-E-FR	165135
		Italian	P.BE-CP-FB5-E-IT	165165

CPI installation system


Technical data – Fieldbus node CP-FB06-E



This fieldbus node handles communication between the decentralised CP system and a higher-order master. The fieldbus node is a slave station on the fieldbus and represents the I/O data and diagnostic information of the connected CP modules on the network.

For the electrical peripherals, this module provides the separate electrical system supply for

- the electronics modules and sensor supply, and
- the load current of the valves.

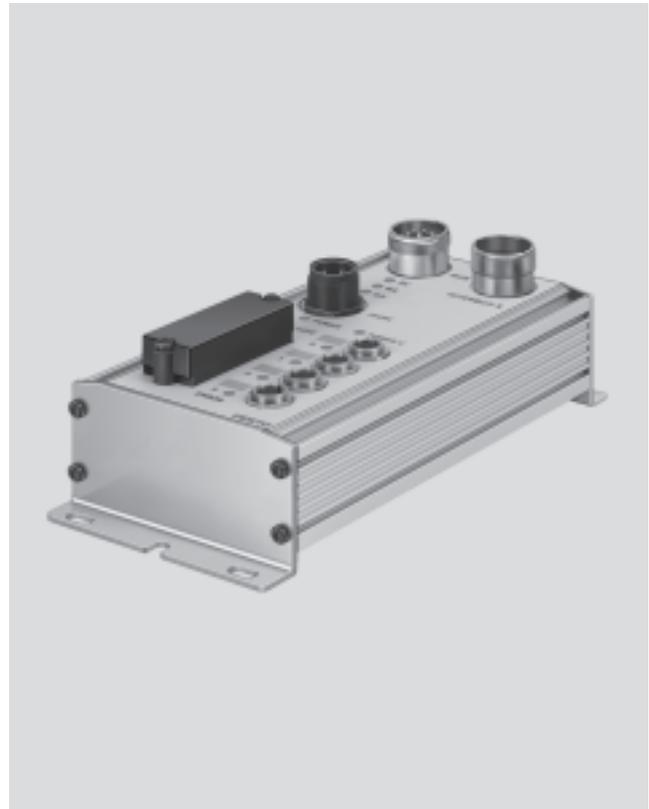

Application

Bus connection

The bus connection is established via two 9-pin M23 connections with a typical Interbus pin allocation. The plug and socket are labelled with Remote IN and Remote OUT in

accordance with the definition for the Interbus remote bus. Both bus cables are always routed to the fieldbus node and looped through in accordance with the ring structure of the Interbus.

The CP fieldbus node receives the data from the higher-order controller and forwards it to the connected CP valve terminals or electrical output modules. The signal status of the

inputs is requested from the input modules and forwarded to the CP fieldbus nodes.

Implementation

The FB6 supports the digital input and output modules and the solenoid coils. It can service a total of

64 digital outputs, of which max. 64 can include solenoid coils, and 64 digital inputs.



Note

Please observe the general guidelines regarding addressing when assigning outputs.

CPI installation system

Technical data – Fieldbus node CP-FB06-E


FESTO

General technical data		
Type	CP-FB06-E	
Part No.	18225	
Baud rates	500 kbps	
ID code	3	
No. of process data bits	16, 32, 48 or 64 depending on expansion	
PCP channel	No	
Configuration support	Icon file for CMD software Station description file with CMD software	
Max. no. of solenoid coils	64	
Max. no. of outputs incl. solenoid coils	64	
Max. no. of inputs	64	
LED diagnostic indicators	Power	Power supply indicator for internal electronics
	Power V	Power supply indicator for valves
	0...3	CP string LED
	RC	Remotebus check
	BA	Bus active
	RD	Remotebus disable
Device-specific diagnostics transmitted to the controller as common message (peripherals errors)	<ul style="list-style-type: none"> • Short circuit/overload of outputs • Undervoltage of valves • Undervoltage of outputs • Undervoltage of sensor supply 	
Additional functions	Test routine for checking the valves and outputs without bus communication	
Operating voltage	Nominal value	24 V DC polarity-safe
	Permissible range	20.4 ... 26.4 V
	Power failure buffering	20 ms
Current consumption pin 1	Fieldbus node	250 mA
	CP modules	560 mA (internal electronics) + total current consumption of inputs
Current limiting	Electronics of fieldbus node and CP connection	Max. 1.25 A, short circuit proof
Load voltage pin 2	Solenoid valves	Total of all valves switched simultaneously, see technical data on CP valves ➔ Internet: type 10 and Internet: type 12 (Compact Performance valve terminals CPV and CPA)
Current limiting	Supply for solenoid valves	Max. 2.5 A, fused
Protection class to EN 60 529	IP65	
Temperature range	Operation	-5 ... +50 °C
	Storage	-20 ... +70 °C
Materials	Housing	Die-cast aluminium
Dimensions (LxWxD)	196.4 x 88 x 61.5 mm	
Weight	915 g	

CPI installation system

Technical data – Fieldbus node CP-FB06-E

Connection and display components

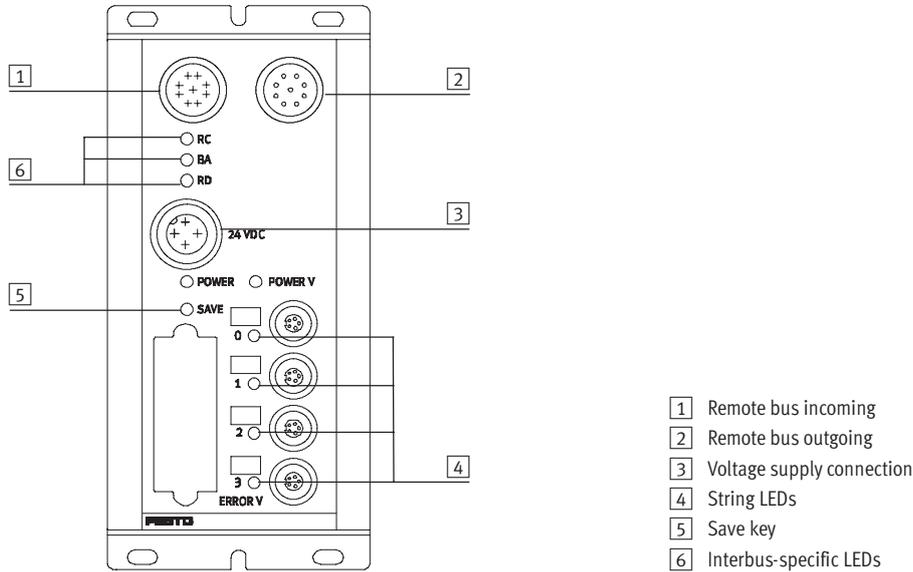

- 1 Remote bus incoming
- 2 Remote bus outgoing
- 3 Voltage supply connection
- 4 String LEDs
- 5 Save key
- 6 Interbus-specific LEDs


Pin allocation for the INTERBUS interface, non-floating installation remote bus			
Pin allocation	Pin No. ¹⁾	Signal	Designation
Incoming			
Plug view 	1	DO	Data out
	2	/DO	Data out inverse
	3	DI	Data in
	4	/DI	Data in inverse
	5	Load	Reference conductor
	6	FE	Functional earthing for installation remote bus
	7	+24 V	Installation remote bus supply
	8	+0 V	Installation remote bus supply
	Sleeve	Screen	Screening
Outgoing			
Socket view 	1	DO	Data out
	2	/DO	Data out inverse
	3	DI	Data in
	4	/DI	Data in inverse
	5	Load	Reference conductor
	6	FE	Functional earthing for installation remote bus
	7	+24 V	Installation remote bus supply
	8	+0 V	Installation remote bus supply
	9	RBST	Establish bridge to pin 5
Sleeve	Screen	Screening	

1) Pins not listed here must not be connected.

CPI installation system

Accessories – Fieldbus node CP-FB06-E

FESTO

Ordering data				
Designation			Type	Part No.
Power supply				
	Power supply socket, straight M18x1, 4-pin	for 1.5 mm ²	NTSD-GD-9	18493
		for 2.5 mm ²	NTSD-GD-13,5	18526
	Power supply socket, angled M18x1, 4-pin	for 1.5 mm ²	NTSD-WD-9	18527
		for 2.5 mm ²	NTSD-WD-11	533119
Valve terminal connection				
	Connecting cable WS-WD	0,25 m	KVI-CP-3-WS-WD-0,25	540327
		0,5 m	KVI-CP-3-WS-WD-0,5	540328
		2 m	KVI-CP-3-WS-WD-2	540329
		5 m	KVI-CP-3-WS-WD-5	540330
		8 m	KVI-CP-3-WS-WD-8	540331
	Connecting cable GS-GD	2 m	KVI-CP-3-GS-GD-2	540332
		5 m	KVI-CP-3-GS-GD-5	540333
		8 m	KVI-CP-3-GS-GD-8	540334
Mounting				
	Mounting for H-rail		CP-TS-HS35	170169
User documentation				
	User documentation – Bus node CP-FB06-E	German	P.BE-CP-FB6-E-DE	165106
		English	P.BE-CP-FB6-E-EN	165206
		French	P.BE-CP-FB6-E-FR	165136
		Italian	P.BE-CP-FB6-E-IT	165166
		Spanish	P.BE-CP-FB6-E-ES	165236
		Swedish	P.BE-CP-FB6-E-SV	165266

CPI installation system

Technical data – Fieldbus node CP-FB11-E

DeviceNet

This fieldbus node handles communication between the decentralised CP system and a higher-order master. The fieldbus node is a slave station on the fieldbus and represents the I/O data and diagnostic information of the connected CP modules on the network.

For the electrical peripherals, this module provides the separate electrical system supply for

- the electronics modules and sensor supply, and
- the load current of the valves.

The FB11 fieldbus node supports the CAN-based fieldbus protocol DeviceNet.

- DeviceNet



Application

Bus connection

The DeviceNet connection is established via a 5-pin M12 plug with pins that corresponds to the specific mini connector. A DeviceNet installation with a higher degree of protection is typically installed using main and

branch lines that are connected via T-pieces. Various manufacturers such as Turck, Lumberg and Rockwell offer finished cables and terminating resistors. The terminating resistors are attached to

the two outermost T-pieces. This installation technique keeps the bus closed while a bus station is being removed. Provides detailed diagnostic information about status bits for the master controller.

Implementation

The FB11 supports the digital input and output modules. It can service a total of 64 digital

inputs and 64 digital outputs, of which max. 64 can include solenoid coils.



Note

Please observe the general guidelines on I/O addressing when assigning the outputs.

CPI installation system

Technical data – Fieldbus node CP-FB11-E




General technical data		
Type	CP-FB11-E	
Part No.	18 227	
Baud rates	Set using HW switch <ul style="list-style-type: none"> • 125 kbps • 250 kbps • 500 kbps 	
Addressing range	Set using 2 rotary switches 0 ... 63	
Product type	Communication converter (12 dec.)	
Product code	2282 hex./35050 dec.	
Type of communication	Polling/Cos/Bit Strobe	
Configuration support	EDS file and graphics symbol	
Max. no. of solenoid coils	64	
Max. no. of outputs and solenoid coils	64	
Max. no. of inputs	64	
LED diagnostic indicators	Bus/Power	Operating voltage of bus
	Module status	Operating status
	I/O Error	Internal error
Device-specific diagnosis via DeviceNet	<ul style="list-style-type: none"> • Short circuit/overload of outputs • Undervoltage of valves • Undervoltage of outputs • Undervoltage of sensor supply • Interrupt point on CP string 	
Operating voltage	Nominal value	24 V DC polarity-safe
	Permissible range	20.4 ... 26.4 V
	Power failure buffering	20 ms
Current consumption pin 1	Fieldbus node	250 mA
	CP module	560 mA (internal electronics) + total current consumption of inputs, internal
Current limiting	Electronics of fieldbus node and CP connection	Max. 1.25 A, short circuit proof
Current consumption pin 2	Solenoid valves	Total of all valves switched simultaneously, see technical data on CP valves ➔ Internet: type 10 and Internet: type 12 (Compact Performance valve terminals CPV and CPA)
Protection class to EN 60 529	IP65	
Temperature range	Operation	-5 ... +50 °C
	Storage/transport	-20 ... +70 °C
Materials	Housing	Die-cast aluminium
Dimensions (HxWxD)	196.4 x 88 x 61.5 mm	
Grid dimension	72 mm	
Weight	950 g	

CPI installation system

Technical data – Fieldbus node CP-FB11-E

Connection and display components

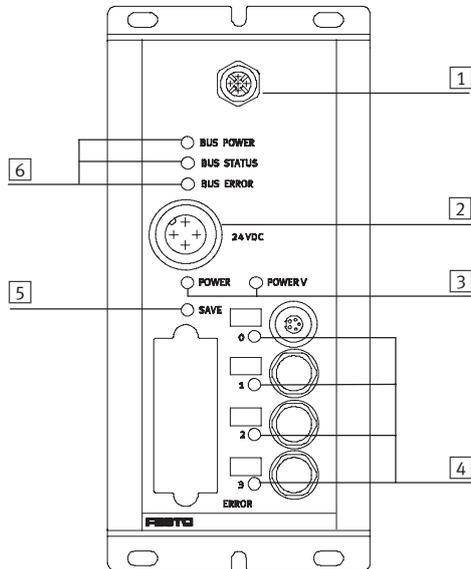

- 1 Plug for fieldbus cable
- 2 Operating voltage connection for CP and valves
- 3 Operating voltage LEDs
- 4 String LEDs
- 5 Save key
- 6 Bus status LEDs


Pin allocation for fieldbus interface

Pin allocation	Pin No.	Signal
	1	Screen
	2	+24 V bus
	3	GND Bus
	4	Data+
	5	Data-
2	Housing of the fieldbus connection module PE	
3	Internal screening connection in the valve terminal	

CPI installation system

Accessories – Fieldbus node CP-FB11-E

FESTO

Ordering data				
Designation			Type	Part No.
Power supply				
	Power supply socket, straight M18x1, 4-pin	for 1.5 mm ²	NTSD-GD-9	18493
		for 2.5 mm ²	NTSD-GD-13,5	18526
	Power supply socket, angled M18x1, 4-pin	for 1.5 mm ²	NTSD-WD-9	18527
		for 2.5 mm ²	NTSD-WD-11	533119
Fieldbus connection				
	Bus connection, straight, PG9, 5-pin		FBSD-GD-9-5POL	18324
Valve terminal connection				
	Connecting cable WS-WD	0,25 m	KVI-CP-3-WS-WD-0,25	540327
		0,5 m	KVI-CP-3-WS-WD-0,5	540328
		2 m	KVI-CP-3-WS-WD-2	540329
		5 m	KVI-CP-3-WS-WD-5	540330
		8 m	KVI-CP-3-WS-WD-8	540331
	Connecting cable GS-GD	2 m	KVI-CP-3-GS-GD-2	540332
		5 m	KVI-CP-3-GS-GD-5	540333
		8 m	KVI-CP-3-GS-GD-8	540334
Mounting				
	Mounting, for H-rail		CP-TS-HS35	170169
User documentation				
	User documentation – Bus node CP-FB11-E	German	P.BE-CP-FB11-E-DE	165111
		English	P.BE-CP-FB11-E-EN	165211
		French	P.BE-CP-FB11-E-FR	165141
		Italian	P.BE-CP-FB11-E-IT	165171
		Spanish	P.BE-CP-FB11-E-ES	165241
		Swedish	P.BE-CP-FB11-E-SV	165271

CPI installation system

Technical data – Fieldbus node CP-FB13-E



This fieldbus node handles communication between the decentralised CP system and a higher-order master via Profibus DP. The fieldbus node is a slave station on the fieldbus and represents the I/O data and diagnostic information of the connected CP modules on the network.

For the electrical peripherals, this module provides the separate electrical system supply for

- the electronics modules and sensor supply, and
- the load current of the valves.

The status of the voltage supplies and the bus communication is indicated via the LEDs Power, Power Valves, String Error and Bus Error.

- Profibus-DP



Application

Bus connection

The bus connection is established via a 9-pin Sub-D socket with a typical Profibus allocation (to EN 50 170). The bus connector plug (with protection class IP65 from Festo or IP20

from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable. An active bus terminal can be connected using the integrated DIL switch. The Sub-D

interface is designed for the control of network components via a fibre optic cable connection and provides detailed diagnostic information for master detection.



Note

Alternatively the bus connection can be established via a 2x M12 adapter plug (B-coded).

Implementation

The FB13 supports digital input and output modules and solenoid coils. 64 digital outputs in total, of which max. 64 solenoid coils. Max. 64 digital inputs for recording sensor signals.



Note

When assigning the electrical modules, please observe the configuration guidelines for valve terminals in relation to address allocation and the number of occupied module positions.

CPI installation system

Technical data – Fieldbus node CP-FB13-E




General technical data		
Type		CP-FB13-E
Part No.		174337
Baud rates		Automatic detection 9.6 kBaud ... 12 MBaud
Addressing range		Set using 2 DIL switches 1 ... 125
Product family		4: Valves
Ident. number		0xFB13
Type of communication		Cyclic communication
Configuration support		GSD file and bitmaps
Max. no. of solenoid coils		64
Max. no. of outputs and solenoid coils		64
Max. no. of inputs		64
LED diagnostic indicators	Power	Operating voltage of electronics
	Power V	Operating voltage of valves and outputs
	Bus Error	Communication error
	0...3	CP string
Device-specific diagnostics via Profibus-DP		<ul style="list-style-type: none"> • Short circuit/overload of outputs • Undervoltage of valves • Undervoltage of outputs • Undervoltage of sensor supply • Interrupt points on CP string
Additional functions		<ul style="list-style-type: none"> • Test routine for checking the valves and outputs without bus communication
Operating voltage	Nominal value	24 V DC polarity-safe
	Permissible range	20.4 ... 26.4 V
	Power failure buffering	20 ms
Current consumption pin 1	Fieldbus node	250 mA
	CP module	560 mA (internal electronics) + total current consumption of inputs, internal
Current limiting	Electronics of fieldbus node and CP connection	Max. 1.25 A, short circuit proof
Current consumption pin 2	Solenoid valves	Total of all valves switched simultaneously, see technical data on CP valves ➔ Internet: type 10 and Internet: type 12 (Compact Performance valve terminals CPV and CPA)
Current limiting	Supply for solenoid valves	Max. 2.5 A, fused
Protection class to EN 60 529		IP65
Temperature range	Operation	-5 ... +50 °C
	Storage/transport	-20 ... +70 °C
Materials	Housing	Die-cast aluminium
Dimensions (LxWxD)		196.4 x 88 x 61.5 mm
Grid dimension		72 mm
Weight		925 g

CPI installation system

Technical data – Fieldbus node CP-FB13-E

Connection and display components

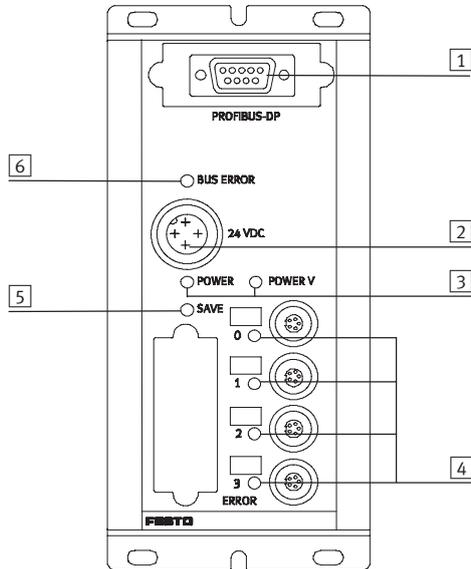

- 1 Plug for fieldbus cable
- 2 Operating voltage connection for CP and valves
- 3 Operating voltage LEDs
- 4 String LEDs
- 5 Save key
- 6 Bus-specific LED

Pin allocation for Profibus DP interface



Pin allocation	Pin	Signal	Designation
Plug, Sub-D			
	1	n.c.	Not connected
	2	n.c.	Not connected
	3	RxD/TxD-P	Received/transmitted data P
	4	CNTR-P ¹⁾	Repeater control signal
	5	DGND	Data reference potential (M5V)
	6	VP	Supply voltage (P5V)
	7	n.c.	Not connected
	8	RxD/TxD-N	Received/transmitted data N
	9	n.c.	Not connected
	Housing	Screen	Connection to housing
	Bus connection M12 adapter plug (B-coded)		
Incoming			
	1	n.c.	Not connected
	2	RxD/TxD-N	Received/transmitted data N
	3	n.c.	Not connected
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Screen	Connection to functional earth
Outgoing			
	1	VP	Supply voltage (P5V)
	2	RxD/TxD-N	Received/transmitted data N
	3	DGND	Data reference potential (M5V)
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Screen	Connection to functional earth

1) The repeater control signal CNTR-P is realised as a TTL signal.

CPI installation system

Accessories – Fieldbus node CP-FB13-E

FESTO

Ordering data				
Designation			Type	Part No.
Power supply				
	Power supply socket, straight M18x1, 4-pin	for 1.5 mm ²	NTSD-GD-9	18493
		for 2.5 mm ²	NTSD-GD-13,5	18526
	Power supply socket, angled M18x1, 4-pin	for 1.5 mm ²	NTSD-WD-9	18527
		for 2.5 mm ²	NTSD-WD-11	533119
Fieldbus connection				
	Plug Sub-D, for Profibus DP		FBS-SUB-9-GS-DP-B	532216
	Bus connection 2x M12 adapter plug (B-coded) for Profibus DP		FBA-2-M12-5POL-RK	533118
Valve terminal connection				
	Connecting cable WS-WD	0,25 m	KVI-CP-3-WS-WD-0,25	540327
		0,5 m	KVI-CP-3-WS-WD-0,5	540328
		2 m	KVI-CP-3-WS-WD-2	540329
		5 m	KVI-CP-3-WS-WD-5	540330
		8 m	KVI-CP-3-WS-WD-8	540331
			Connecting cable GS-GD	2 m
5 m	KVI-CP-3-GS-GD-5			540333
8 m	KVI-CP-3-GS-GD-8			540334
Mounting				
	Mounting for H-rail		CP-TS-HS35	170169
User documentation				
	User documentation – Bus node CP-FB13-E	German	P.BE-CP-FB13-E-DE	165113
		English	P.BE-CP-FB13-E-EN	165213
		French	P.BE-CP-FB13-E-FR	165143
		Italian	P.BE-CP-FB13-E-IT	165173
		Swedish	P.BE-CP-FB13-E-SV	165273
		Spanish	P.BE-CP-FB13-E-ES	165243

CPI installation system


Technical data – Input modules CP-E16

Function

Digital input modules facilitate the connection of proximity sensors or other 24 V DC sensors (inductive, capacitive, etc.).
M12 plugs with double allocation are separated using a DUO plug or DUO cable.

Application

- Input modules for 24 V DC sensor signals
- M8 and M12 plugs, single allocation connection technology with 16 connections, double allocation connection technology with 8 connections
- M12 plug, 5-pin
- The input statuses are indicated for each input signal on an assigned LED
- 24 V DC supply provided for all connected sensors
- Diagnostic LED for short circuit/ undervoltage of sensor supply
- Diagnostic LED for short circuit/ interruption of external sensor supply with CP-E-16-M8-Z

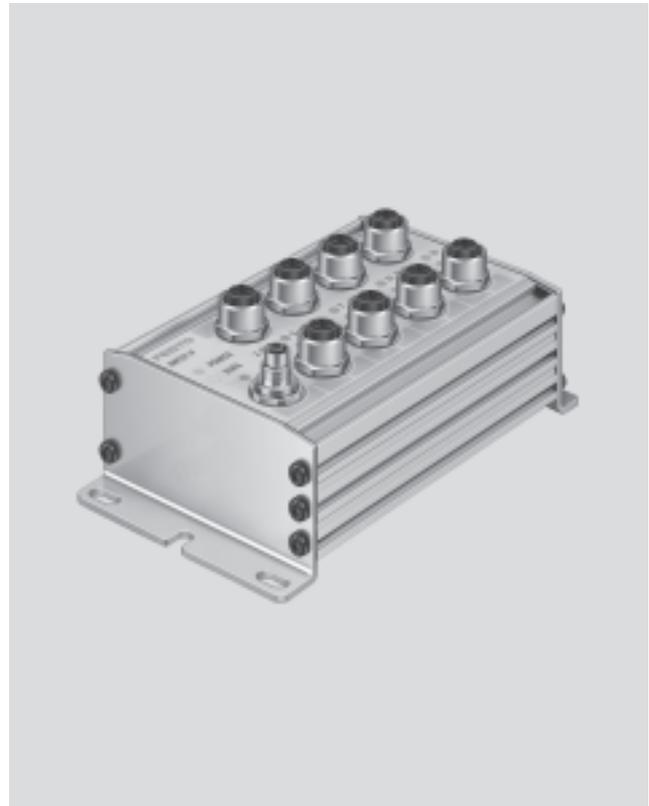

General technical data			
Type	CP-E16-M8 positive switching	CP-E16N-M8 negative switching	CP-E16-M12x2-5POL positive switching
Part No.	18205	18243	175561
No. of inputs	16		
Allocation of inputs	Single allocation		Double allocation
Sensor connection type	16x M8, 3-pin		8x M12, 5-pin
Power supply 24 V DC	Coming from bus node		
Intrinsic current consumption of electronics [mA]	40	90	
Input current at 24 V DC (from sensor) [mA]	Typically 8		Typically 6
Fuse protection for sensors and electronic module	Internal electronic short circuit protection		
Max. current consumption of sensor supply, residual current [A]	Max. 0.5		
Supply voltage of sensors [V]	24 DC ±25%		
Protection against polarity reversal	For logic and sensor voltage		
Galvanic isolation	None		
Switching level	Signal 0 [V]	≤5	≥-11
	Signal 1 [V]	≥11	≤-5
Input delay [ms]	Typically 5		Typically 3
Switching logic	PNP	NPN	PNP
Input characteristic curve	To IEC 1131-2		
Connection to bus node	Via pre-assembled cables		
Protection class to EN 60 529	IP65 (when fully plugged in or fitted with protective cover)		
Temperature range	Operation [°C]	-5 ... +50	
	Storage [°C]	-20 ... +70	
Material	Die-cast aluminium		
Dimensions [mm]	148.9 x 66 x 47.9		140.9 x 78 x 55.2
Weight [g]	400		500

CPI installation system

Technical data – Input modules CP-E16

FESTO


General technical data				
Type	CP-E16N-M12x2 negative switching		CP-E16-M8-Z positive and negative switching	
Part No.	18244		189670	
No. of inputs	16			
Allocation of inputs	Double allocation		Single allocation	
Sensor connection type	8x M12, 4-pin		16x M8, 3-pin	
Power supply 24 V DC	Coming from bus node		Coming from bus node, connection for additional sensor supply	
Intrinsic current consumption of electronics [mA]	90		40	
Input current at 24 V DC (from sensor) [mA]	Typically 8			
Fuse protection for sensors and electronic module	Internal electronic short circuit protection		Electronic short circuit protection per group	
Max. current consumption of sensor supply, residual current [A]	Max. 0.5		Max. 1 per 8-fold input group	
Supply voltage of sensors [V]	24 DC $\pm 25\%$			
Protection against polarity reversal	For logic and sensor voltage			
Galvanic isolation	None			
Switching level			PNP	NPN
	Signal 0 [V]	≥ 11	≤ 6	≥ -8.6
	Signal 1 [V]	≤ 5	≥ 8.6	≤ -6
Input delay [ms]	Typically 5		Typically 3	
Switching logic	NPN		PNP/NPN	
Input characteristic curve	To IEC 1131-2			
Connection to bus node	Via pre-assembled cables			
Protection class to EN 60 529	IP65 (when fully plugged in or fitted with protective cover)			
Temperature range	Operation [°C]	-5 ... +50		
	Storage [°C]	-20 ... +70		
Material	Die-cast aluminium			
Dimensions [mm]	140.9 x 78 x 55.2		216.9 x 66 x 50.6	
Weight [g]	500		420	

CPI installation system

Technical data – Input modules CP-E16

Connection and display components

CP-E16-M12x2-5POL and CP-E16N-M12x2

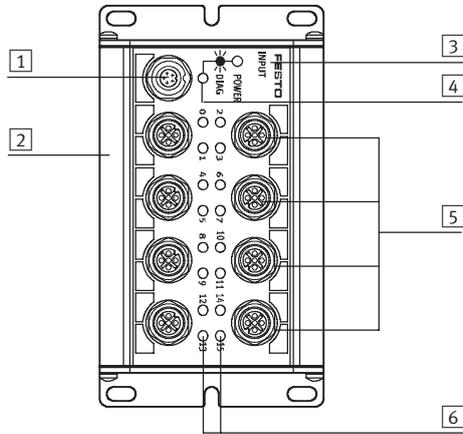

- 1 CP connection
- 2 Slot for inscription labels (ISB 6x10)
- 3 Identification of input type:
-INPUT-P for PNP inputs
-INPUT-N for NPN inputs
- 4 Status LED (green)
- 5 Sensor connections
- 6 Green LED for status display (one LED per input)

Pin allocation for sensor connections CP-E16-M12x2-5Pol

Pin allocation	Pin	Signal	Description	Pin	Signal
	1	24 V	Operating voltage 24 V	1	24 V
	2	Ix+1*	Sensor signal	2	Ix+3*
	3	0 V	Operating voltage 0 V	3	0 V
	4	Ix*	Sensor signal	4	Ix+2*
	5	Ground	Earth terminal	5	Ground

Pin allocation for sensor connections CP-E16...-M12x2

Pin allocation	Pin	Signal	Description	Pin	Signal
	1	24 V	Operating voltage 24 V	1	24 V
	2	Ix+1*	Sensor signal	2	Ix+3*
	3	0 V	Operating voltage 0 V	3	0 V
	4	Ix*	Sensor signal	4	Ix+2*


* Ix = Input x

CPI installation system

Technical data – Input modules CP-E16

Connection and display components

CP-E16-M8-Z

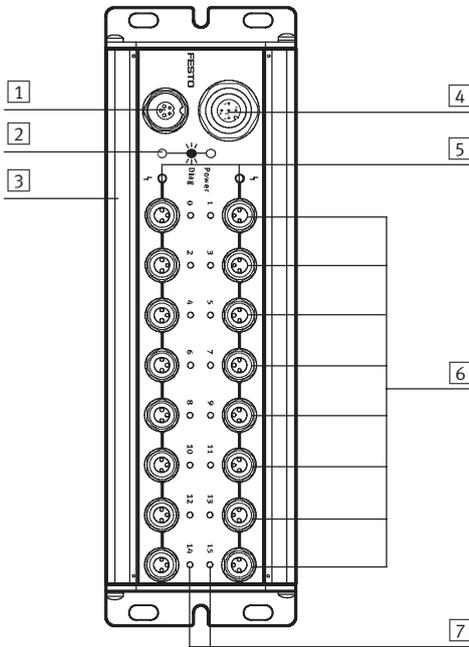

- 1 CP connection
- 2 Status LED (green)
- 3 Slot for inscription labels (ISB 6x10)
- 4 Connection for sensor supply
- 5 Red LED for short circuit display or sensor voltage failure (one LED per input group)
- 6 Sensor connections
- 7 Green LED for status display (one LED per input)

Pin allocation for external sensor supply CP-E16-M8-Z

Pin allocation	Pin	Signal	Description	
	1	24 V DC ±25%	Operating voltage	<p>Note</p> <p>External sensor supply for CP-E16-M8-Z: Specified for PNP or NPN operation (type CP-E16-M8-Z). The input module provides PNP or NPN inputs. The setting for PNP or NPN operation is made by installing a bridge in the socket of the sensor supply connection.</p>
	2	PNP/NPN	Coding with negative/positive switching: – PNP operation (pin 2 and 3 bridged) – NPN operation (pin 2 and 1 bridged)	
	3	0 V	Operating voltage 0 V	
	4	n.c.	Not connected	
	5	Ground	Earth terminal	

Pin allocation for sensor connections CP-E16...-M8 and CP-E16-M8-Z

Pin allocation	Pin	Signal	Description	Pin	Signal
	1	24 V	Operating voltage 24 V	1	24 V
	3	0 V	Operating voltage 0 V	3	0 V
	4	Ix*	Sensor signal	4	Ix+1*


* Ix = Input x

CPI installation system

Technical data – Input modules CP-E16

Connection and display components

CP-E16-M8 and CP-E16N-M8

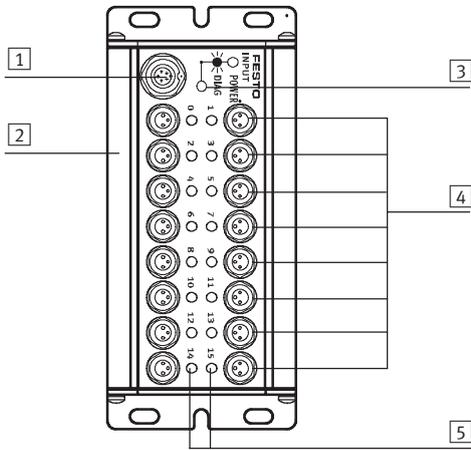

- 1 CP connection
- 2 Slot for inscription labels (ISB 6x10)
- 3 Status LED (green)
- 4 Sensor connections
- 5 Green LED for status display (one LED per input)

Pin allocation for sensor connections CP-E16...-M8 and CP-E16-M8-Z



Pin allocation	Pin	Signal	Description	Pin	Signal
	1	24 V	Operating voltage 24 V	1	24 V
	3	0 V	Operating voltage 0 V	3	0 V
	4	Ix*	Sensor signal	4	Ix+1*

* Ix = Input x

CPI installation system

Accessories – Input modules CP-E16

FESTO

Ordering data				
Designation			Type	Part No.
Power supply				
	Power supply socket, straight, M12x1, 5-pin		FBSD-GD-9-5POL	18324
Sensor plugs				
	Plug, straight socket, M12	5-pin, PG7	SEA-M12-5GS-PG7	175487
		4-pin, PG7	SEA-GS-7	18666
		4-pin, 2.5 mm ² O.D.	SEA-4GS-7-2,5	192008
	Plug, straight, M8	3-pin, solderable	SEA-GS-M8	18696
3-pin, screw-in		SEA-3GS-M8-S	192009	
	Plug for 2 sensor cables, M12, PG11	4-pin	SEA-GS-11-DUO	18779
		5-pin	SEA-5GS-11-DUO	192010
Sensor cables				
	Connecting cable, M12, 4-pin, straight plug-straight socket	2.5 m	KM12-M12-GSGD-2,5	18684
		5.0 m	KM12-M12-GSGD-5	18686
	Connecting cable, M12, 4-pin, straight plug-angled socket	1.0 m	KM12-M12-GSWD-1-4	185499
	Connecting cable, M8, straight plug-straight socket	0.5 m	KM8-M8-GSGD-0,5	175488
		1.0 m	KM8-M8-GSGD-1	175489
		2.5 m	KM8-M8-GSGD-2,5	165610
		5.0 m	KM8-M8-GSGD-5	165611
Mounting				
	Mounting for H-rail		CP-TS-HS35	170169
User documentation				
	User documentation for input/output modules	German	P.BE.-CPEA-DE	165125
		English	P.BE.-CPEA-EN	165225
		French	P.BE.-CPEA-FR	165127
		Italian	P.BE.-CPEA-IT	165157
		Spanish	P.BE.-CPEA-ES	165227
		Swedish	P.BE.-CPEA-SV	165257

CPI installation system


Technical data – Input modules CP-E...-EL

Function

Digital input modules facilitate the connection of proximity sensors or other 24 V DC sensors (inductive, capacitive, etc.). Plugs with double allocation are separated using a DUO plug or DUO cable.

Application

- Input modules for 24 V DC sensor signals
- M8 and M12 connection technology
- Display of the input statuses for each input signal via an assigned LED
- Operating voltage supply 24 V DC for all connected sensors
- Diagnostic LED for short circuit/overload of sensor supply
- Circumferential labelling with large, hinged inscription label
- Earthing plate and H-rail mounting already integrated

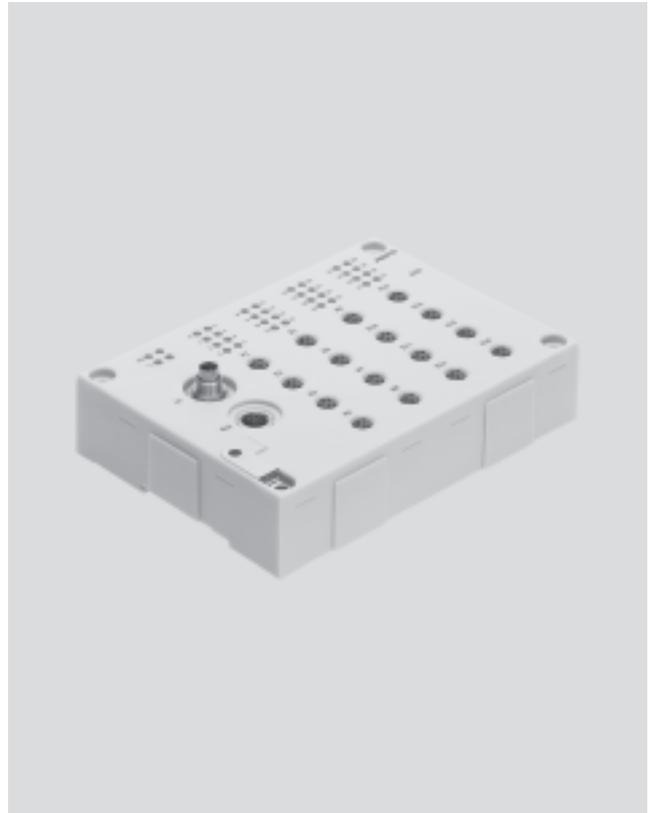

General technical data			
Type	CP-E16-M12-EL positive switching	CP-E16-M8-EL positive switching	CP-E32-M8-EL positive switching
Part No.	546923	546922	546921
No. of inputs	16		32
Allocation of inputs	Double allocation	Single allocation	Double allocation
Sensor connection type	16x M12, 5-pin	16x M8, 3-pin	32x M8, 4-pin
Power supply 24 V DC	Via CP connection		
Intrinsic current consumption at operating voltage [mA]	Typically 75 mA		
Fuse (short circuit)	Internal electronic fuse protection for each group		Internal electronic fuse
Max. residual current per module [A]	0.7		1.4
Nominal operating voltage for sensors	24		
Operating voltage range for sensors [V]	18 ... 30 DC		
Galvanic isolation	None		
Switching level	Signal 0 [V]	≤ 6	
	Signal 1 [V]	≥ 8.6	
Debounce time at inputs [ms]	3 ms (0.5 ms, 10 ms, 20 ms, parameterisable)		
Signal extension	0.5 ms (15 ms, 50 ms, 100 ms, parameterisable)		
Switching logic	PNP		
Input characteristic curve	To IEC 1131-2		
Connection to bus node	Via pre-assembled cables		
Diagnostics	CP communication		
	Short circuit/overload		
	Undervoltage		
LEDs	2 Module diagnostics		2 Module diagnostics 32 Channel status
	4 Group diagnostics		
	16 Channel status		

CPI installation system

Technical data – Input modules CP-E...-EL



General technical data				
Type		CP-E16-M12-EL positive switching	CP-E16-M8-EL positive switching	CP-E32-M8-EL positive switching
Part No.		546923	546922	546921
Dimensions (LxWxH)	[mm]	143 x 104 x 30		
Weight	[g]	260		

Operating conditions				
Type		CP-E16-M12-EL	CP-E16-M8-EL	CP-E32-M8-EL
Protection class to EN 60529		IP65 (when fully plugged in or fitted with protective cover)		
Ambient temperature	Operation	[°C]	-5 ... +50	
	Storage	[°C]	-20 ... +70	
Corrosion resistance class CRC ¹⁾		1		
CE mark (see declaration of conformity)		In accordance with EU EMC directive		
Certification		cULus listed (OL)		


1) Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

CPI installation system

Technical data – Input modules CP-E...-EL

Connection and display components

CP-E16-M12-EL

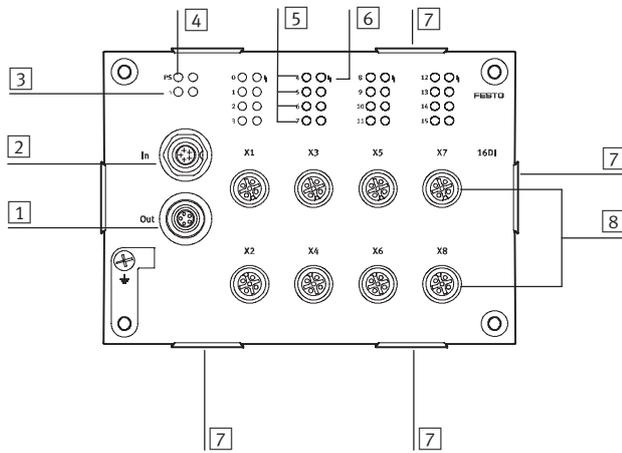

- 1 CP connection, outgoing
- 2 CP connection, incoming
- 3 Status LED (module) for short circuit/overload of sensor supply (red)
- 4 Status LED for CP communication (green)
- 5 Status LEDs for inputs (status display, green)
- 6 Status LED (group) for short circuit/overload of sensor supply (red)
- 7 Fixture for inscription label holder ASCF-H-E2
- 8 Sensor connections (2 inputs per socket)

Pin allocation for sensor connections CP-E16-M12-EL

Pin allocation	Pin	Signal	Description
	1	24 V	Operating voltage 24 V
	2	Ix+1*	Sensor signal
	3	0 V	Operating voltage 0 V
	4	Ix*	Sensor signal
	5	Ground	Earth terminal

* Ix = Input x


CPI installation system

Technical data – Input modules CP-E...-EL



Connection and display components

CP-E16-M8-EL

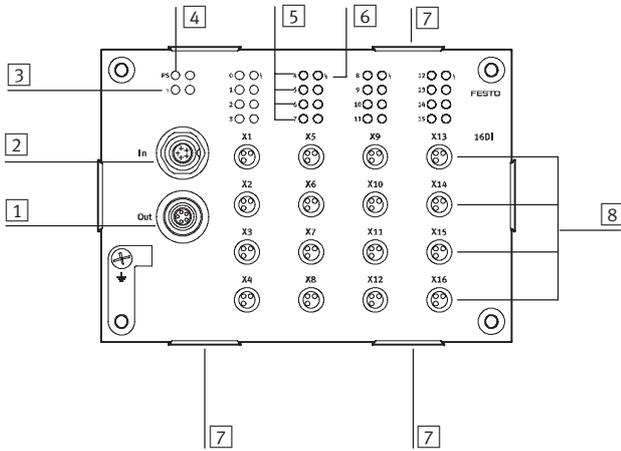

- 1 CP connection, outgoing
- 2 CP connection, incoming
- 3 Status LED (module) for short circuit/overload of sensor supply (red)
- 4 Status LED for CP communication (green)
- 5 Status LEDs for inputs (status display, green)
- 6 Status LED (group) for short circuit/overload of sensor supply (red)
- 7 Fixture for inscription label holder ASCF-H-E2
- 8 Sensor connections (1 input per socket)

Pin allocation for sensor connections CP-E16-M8-EL

Pin allocation	Pin	Signal	Description
	1	24 V	Operating voltage 24 V
	3	0 V	Operating voltage 0 V
	4	Ix*	Sensor signal


* Ix = Input x

CPI installation system

Technical data – Input modules CP-E...-EL

Connection and display components

CP-E32-M8-EL

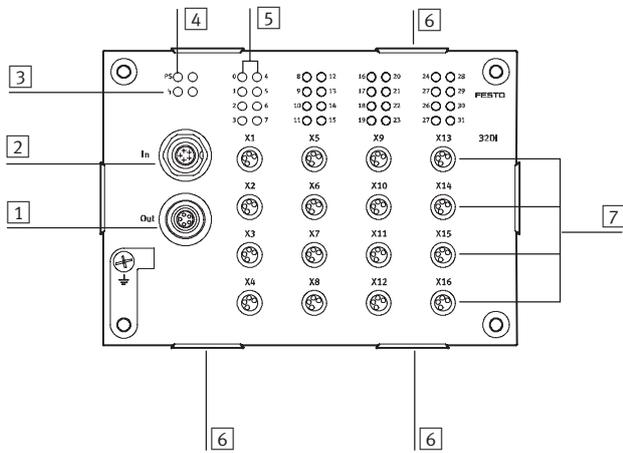

- 1 CP connection, outgoing
 - 2 CP connection, incoming
 - 3 Status LED (module) for short circuit/overload of sensor supply (red)
 - 4 Status LED for CP communication (green)
- 5 Status LEDs for inputs (status display, green)
 - 6 Fixture for inscription label holder ASCF-H-E2
 - 7 Sensor connections (2 inputs per socket)

Pin allocation for sensor connections CP-E32-M8-EL

Pin allocation	Pin	Signal	Description
	1	24 V	Operating voltage 24 V
	2	Ix+1*	Sensor signal
	3	0 V	Operating voltage 0 V
	4	Ix*	Sensor signal

* Ix = Input x

CPI installation system

Accessories – Input modules CP-E...-EL

FESTO

Ordering data				
Designation			Type	Part No.
Plug connectors				
	Straight plug, M12	5-pin, PG7	SEA-M12-5GS-PG7	175487
		4-pin, PG7	SEA-GS-7	18666
		4-pin, 2.5 mm ² O.D.	SEA-4GS-7-2,5	192008
	Straight plug, M8	3-pin, solderable	SEA-GS-M8	18696
		3-pin, screw-in	SEA-3GS-M8-S	192009
	Plug for 2 cables, M12, PG11	4-pin	SEA-GS-11-DUO	18779
		5-pin	SEA-5GS-11-DUO	192010
Connecting cables				
	DUO cable, 1x straight plug M12	2x straight socket M8	KM12-DUO-M8-GDGD	18685
		1x straight socket M8 and 1x angled socket M8	KM12-DUO-M8-GDWD	18688
		2x angled socket M8	KM12-DUO-M8-WDWD	18687
	Connecting cable, M12, 4-pin, straight plug-straight socket	2.5 m	NEBU-M12G4-K-2.5-M12G4 ¹⁾	539052
		5.0 m	NEBU-M12G4-K-5-M12G4 ¹⁾	539052
	Connecting cable, M8, 3-pin, straight plug-straight socket	0.5 m	NEBU-M8G3-K-0.5-M8G3 ¹⁾	539052
		1 m	NEBU-M8G3-K-1-M8G3 ¹⁾	539052
		2.5 m	NEBU-M8G3-K-2.5-M8G3 ¹⁾	539052
		5 m	NEBU-M8G3-K-5-M8G3 ¹⁾	539052
Inscription label holders				
	Inscription label holders for EL modules, bag of 10		ASCF-H-E2	547473
User documentation				
	User documentation for input/output modules	German	P.BE.-CPEA-CL-DE	539299
		English	P.BE.-CPEA-CL-EN	539300
		French	P.BE.-CPEA-CL-FR	539302
		Italian	P.BE.-CPEA-CL-IT	539303
		Spanish	P.BE.-CPEA-CL-ES	539301
		Swedish	P.BE.-CPEA-CL-SV	539304

1) Modular product, further information → Internet: nebu

CPI installation system

Technical data – Input modules CP-E...-CL

Function

Digital input modules facilitate the connection of proximity sensors or other 24 V DC sensors (inductive, capacitive, etc.).

Plugs with double allocation are separated using a DUO plug or DUO cable.

Application

- Input modules for 24 V DC sensor signals
- M8 and M12 plug connection technology
- M12 input module, inputs with double allocation. M8 inputs with single allocation
- M12 plug, 5-pin
- The input statuses are indicated for each input signal on an assigned LED
- 24 V DC supply provided for all connected sensors
- Diagnostic LED for short circuit/undervoltage of sensor supply
- Modules support the CPI functionality (only in combination with the CPX CP interface)



General technical data			
Type	CP-E08-M12-CL positive switching	CP-E08-M8-CL positive switching	CP-E16-KL-CL positive switching
Part No.	538787	538788	538789
No. of inputs	8		16
Allocation of inputs	Double allocation		Single allocation
Sensor connection type	4x M12, 5-pin	8x M8, 3-pin	Spring-loaded terminals or screw terminals
Power supply 24 V DC	From the bus node, basic unit, CP interface, etc.		
Intrinsic current consumption of electronics [mA]	Typically 35 (inputs not connected)		
Input current at 24 V DC (from sensor) [mA]	Typically 6		
Fuse protection for sensors and electronic module	Internal electronic short circuit protection		
Max. current consumption of sensor supply, residual current [A]	Max. 0.8		
Nominal operating voltage for sensors	24		
Operating voltage range for sensors [V DC]	18 ... 30		
Protection against polarity reversal	For logic and sensor supply		
Galvanic isolation	None		
Switching level	Signal 0	[V]	≤5
	Signal 1	[V]	≥-11
Input delay [ms]	Typically 3		
Switching logic	PNP		
Input characteristic curve	To IEC 1131-2		
Connection to bus node	Via pre-assembled cables		
Diagnostics	Undervoltage		
	Short circuit/overload of sensor supply		

CPI installation system

Technical data – Input modules CP-E...-CL

FESTO

General technical data			
Type	CP-E08-M12-CL positive switching	CP-E08-M8-CL positive switching	CP-E16-KL-CL positive switching
Part No.	538787	538788	538789
Material	Polybutylene terephthalate		
Dimensions (WxLxH)	[mm] 151 x 30 x 25		
Weight	[g] 165	190	145

Operating conditions			
Type	CP-E08-M12-CL	CP-E08-M8-CL	CP-E16-KL-CL
Protection class to EN 60529	IP65/IP67 (when fully plugged in or fitted with protective cap)		IP20
Ambient temperature	Operation	[°C] –5 ... +50	
	Storage	[°C] –20 ... +70	
Corrosion resistance class CRC ¹⁾	1		
Explosion protection class	II 3D Ex tD A22 IP67 T70°C X		–
ATEX symbol	II 3G Ex nA II T6 X		–
ATEX ambient temperature	[°C]	–5 ≤ Ta ≤ +50	
CE mark (see declaration of conformity)	In accordance with EU EMC directive		
Certification	cULus listed (OL)		

¹⁾ Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

 - Note


If device combinations are operated in potentially explosive areas, the lowest common zone, the temperature class as well as the ambient temperature of the individual devices determine the possible use of the complete module.

CPI installation system

Technical data – Input modules CP-E...-CL

Connection and display components

CP-E08-M12-CL

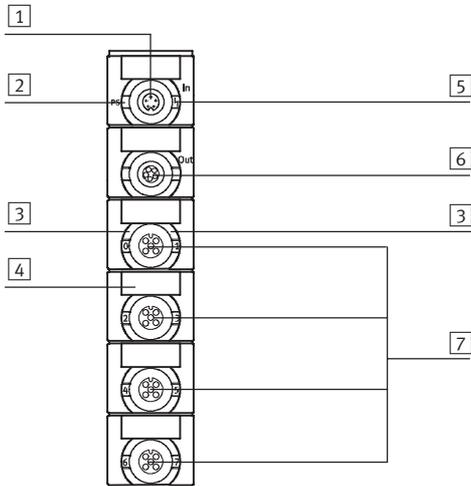

- 1 CP connection, incoming
- 2 Status LED (green)
- 3 Green LED for status display (one LED per input)
- 4 Holder for inscription label (IBS 8x20)
- 5 Red LED for short circuit/overload indication
- 6 CP connection, outgoing
- 7 Sensor connections

Pin allocation for sensor connections CP-E08-M12-CL

Pin allocation	Pin	Signal	Description
	1	24 V	Operating voltage 24 V
	2	Ix+1*	Sensor signal
	3	0 V	Operating voltage 0 V
	4	Ix*	Sensor signal
	5	Ground	Earth terminal


* Ix = Input x

CPI installation system

Technical data – Input modules CP-E...-CL

Connection and display components

CP-E08-M8-CL

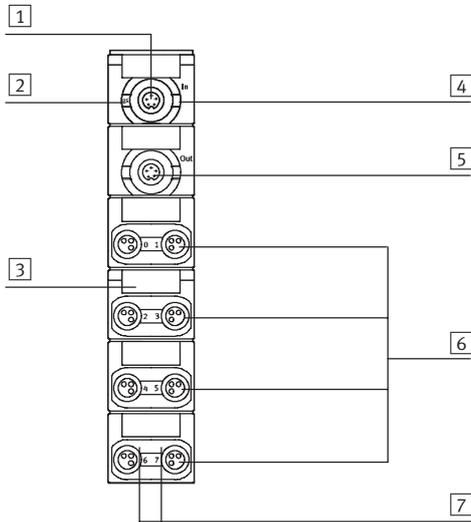

- 1 CP connection, incoming
- 2 Status LED (green)
- 3 Holder for inscription label (IBS 8x20)
- 4 Red LED for short circuit/overload indication
- 5 CP connection, outgoing
- 6 Sensor connections
- 7 Green LED for status display (one LED per input)

Pin allocation for sensor connections CP-E08-M8-CL

Pin allocation	Pin	Signal	Description	Pin	Signal
	1	24 V	Operating voltage 24 V	1	24 V
	3	0 V	Operating voltage 0 V	3	0 V
	4	Ix*	Sensor signal	4	Ix+1*


* Ix = Input x

CPI installation system

Technical data – Input modules CP-E...-CL

Connection and display components

CP-E16-KL-CL

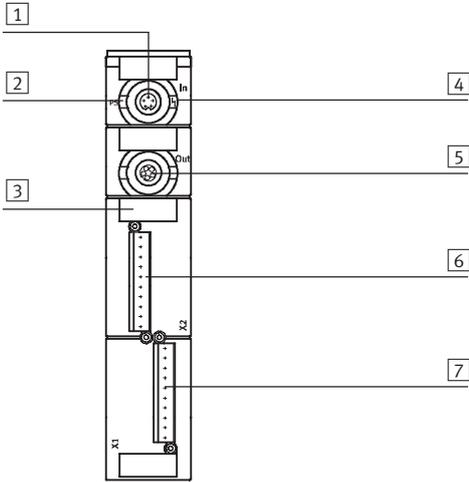

- 1 CP connection, incoming
- 2 Status LED (green)
- 3 Holder for inscription label (IBS 8x20)
- 4 Red LED for short circuit/overload indication
- 5 CP connection, outgoing
- 6 Sensor connections, plug X2
- 7 Sensor connections, plug X1

Pin allocation for sensor supply CP-E16-KL-CL

Pin allocation	Pin	Signal	Description	Pin	Signal	
	Plug X1			Plug X2		<p>Note</p> <p>8 sensors can be connected to each of the connections X1 and X2. When using the three-row plug PS1-SAC30 or PS1-SAC31-30POL+LED, it is possible to use the second and third contact bank for the sensor power supply via a bridge.</p>
	+	24 V DC	Operating voltage	+	24 V DC	
	0	0	Connections for sensors	0	8	
	1	1		1	9	
	2	2		2	10	
	3	3		3	11	
	4	4		4	12	
	5	5		5	13	
	6	6		6	14	
	7	7		7	15	
-	0 V DC		-	0 V DC		




Plug connection for power supply for sensors (PS1-SAC31-30POL+LED)

	Connection row 0		Connection row 1		Connection row 2	
	-	0 V DC	Operating voltage	-	n.c.	-
7	x+7	Connections for sensors	7	24 V DC	7	0 V DC
6	x+6		6		6	
5	x+5		5		5	
4	x+4		4		4	
3	x+3		3		3	
2	x+2		2		2	
1	x+1		1		1	
0	x		0		0	
+	24 V DC	Operating voltage	+	Jumper	+	n.c.

CPI installation system

Accessories – Input modules CP-E...-CL

FESTO

Ordering data				
Designation			Type	Part No.
Sensor plugs				
	Plug, straight socket, M12	5-pin, PG7	SEA-M12-5GS-PG7	175487
		4-pin, PG7	SEA-GS-7	18666
		4-pin, 2.5 mm ² O.D.	SEA-4GS-7-2,5	192008
	Straight plug, M8	3-pin, solderable	SEA-GS-M8	18696
		3-pin, screw-in	SEA-3GS-M8-S	192009
	Plug for 2 sensor cables, M12, PG11	4-pin	SEA-GS-11-DUO	18779
		5-pin	SEA-5GS-11-DUO	192010
Connection sets for sensors				
	Plug, screw-in tension-spring socket with LED	3-row, 30-pin	PS1-SAC31-30POL+LED	197162
Cables				
	DUO cable	2x straight socket	KM12-DUO-M8-GDGD	18685
		2x straight/angled socket	KM12-DUO-M8-GDWD	18688
		2x angled socket	KM12-DUO-M8-WDWD	18687
	Connecting cable, M12, 4-pin, straight plug-straight socket	2.5 m	KM12-M12-GSGD-2,5	18684
		5.0 m	KM12-M12-GSGD-5	18686
Inscription labels				
	Inscription labels 8x20 mm in frames (20 pieces)		IBS-8x20	539388
User documentation				
	User documentation for input/output modules	German	P.BE.-CPEA-CL-DE	539299
		English	P.BE.-CPEA-CL-EN	539300
		French	P.BE.-CPEA-CL-FR	539302
		Italian	P.BE.-CPEA-CL-IT	539303
		Spanish	P.BE.-CPEA-CL-ES	539301
		Swedish	P.BE.-CPEA-CL-SV	539304

CPI installation system

Technical data – Output modules CP-A08

Function

The electrical outputs activate actuators such as individual valves, lamps, signal equipment and many more.

 Note
Optimum actuation of valves with M12 central plug.

Application

- Output module with 8 outputs 24 V DC
- M12 connection technology, with 4- or 5-pin sockets
- LED display of the switching status per channel
- Short circuit and overload detection
- Malfunction display by means of green LED




General technical data			
Type		CP-A08-M12-5POL positive switching	CP-A08N-M12 negative switching
Part No.		175640	18234
No. of outputs		8	
Allocation of outputs		Single allocation	
Output connection type		8x M12, 5-pin	8x M12, 4-pin
Load voltage connection		M18, 4-pin	
Bus connection		2 plugs M9, 5-pin, via prefabricated cables	
Max. output current per channel	[A]	0.5	
Operating voltage	[V]	24 DC ±25%	
Load voltage connection	[V]	24 DC ±25%, protected against incorrect polarity	
Fuse protection for power output	[A]	Electronic fuse per output 0.5	
Intrinsic current consumption, electronics	[mA]	Max. 90	
Overload/short circuit protection		Per channel	
Switching logic		PNP to IEC 1131-2	NPN to IEC 1131-2
Protection class to EN 60529		IP65 (when fully plugged-in or fitted with protective cover)	
Temperature range	Operation	[°C]	-5 ... +50
	Storage	[°C]	-20 ... +70
Material		Die-cast aluminium	
Dimensions (L x W x D)	[mm]	172.9 x 78 x 57.1	
Weight	[g]	500	

CPI installation system

Technical data – Output modules CP-A08

Connection and display components

CP-A08-M12...

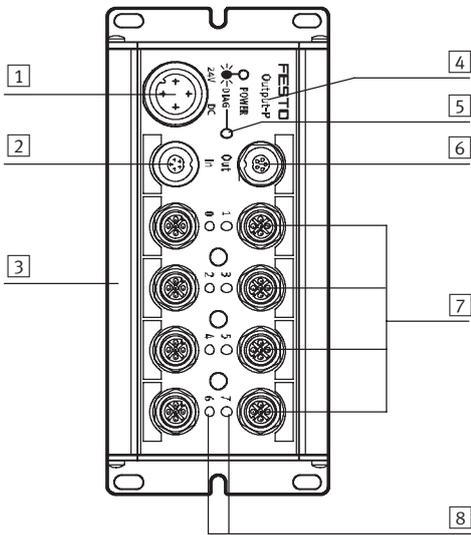

- 1 Load voltage connection
- 2 CP connection, incoming
- 3 Slot for inscription labels (ISB 6x10)
- 4 Identifier for output type:
 - OUTPUT-P for PNP outputs
 - OUTPUT-N for NPN outputs
- 5 Status LED (green)
- 6 CP connection, outgoing
- 7 Connections for actuators
- 8 Yellow LED for status display (one LED per output)

Pin allocation for load voltage connection CP-A08-M12...

Connection allocation	Pin	Signal	Designation
	1	n.c.	Not connected
	2	24 V DC ±25%	Operating voltage
	3	0 V	Operating voltage 0 V
	4	FE (earth)	Protective earth

CPI installation system

Technical data – Output modules CP-A08




Pin allocation for outputs						
Terminal allocation	Pin	Signal	Designation	Pin	Signal	
CP-A08-M12-5POL (PNP outputs)						
	1	n.c.	Not connected	1	n.c.	Note Two outputs can be connected to output sockets 0, 2, 4 and 6 of the CP output module by means of internal connection between pin 2 of the even numbered output and pin 4 of the opposite odd numbered output.
	2	Ox+1	Connected with pin 4 of plug 2/ not connected	2	n.c.	
	3	0 V	Reference potential	3	0 V	
	4	Ox	Output/connected with pin 2 of plug 1	4	Ox+1	
	5	Load	Earth terminal	5	Load	
CP-A08-M12 (NPN outputs)						
	1	24 V DC	Operating voltage	1	24 V DC	Note The consuming devices/load must be supplied with a 24 V operating voltage via pin 1.
	2	FE (earth)	Earth terminal	2	FE (earth)	
	3	n.c.	Not connected	3	n.c.	
	4	Ox	Output	4	Ox+1	

* Ox = Output x

CPI installation system

Accessories – Output modules CP-A08

FESTO

Ordering data				
Designation			Type	Part No.
Power supply				
	Power supply socket, straight, M18x1, 4-pin	for 1.5 mm ²	NTSD-GD-9	18493
		for 2.5 mm ²	NTSD-GD-13,5	18526
	Power supply socket, angled, M18x1, 4-pin	for 1.5 mm ²	NTSD-WD-9	18527
		for 2.5 mm ²	NTSD-WD-11	533119
Sensor plugs				
	Plug, straight socket, M12	5-pin, PG7	SEA-M12-5GS-PG7	175487
		4-pin, PG7	SEA-GS-7	18666
		4-pin, 2.5 mm ² OD	SEA-4GS-7-2,5	192008
	Plug for 2 sensor cables, M12, PG11	4-pin	SEA-GS-11-DUO	18779
		5-pin	SEA-5GS-11-DUO	192010
Cables				
	DUO cable	2x straight socket	KM12-DUO-M8-GDGD	18685
		2x straight/angled socket	KM12-DUO-M8-GDWD	18688
		2x angled socket	KM12-DUO-M8-WDWD	18687
	Connecting cable, M12, 4-pin, straight plug-straight socket	2.5 m	KM12-M12-GSGD-2,5	18684
		5.0 m	KM12-M12-GSGD-5	18686
Mounting				
	Mounting for H-rail		CP-TS-HS35	170169
User documentation				
	User documentation for input/output modules	German	P.BE.-CPEA-DE	165125
		English	P.BE.-CPEA-EN	165225
		French	P.BE.-CPEA-FR	165127
		Italian	P.BE.-CPEA-IT	165157
		Spanish	P.BE.-CPEA-ES	165227
		Swedish	P.BE.-CPEA-SV	165257

CPI installation system

Technical data – Output modules CP-A08-EL


Function

The electrical outputs actuate actuators such as individual valves, signal equipment and many more.

Note
The output module is ideal for actuation of valves with M12 central plug.

Application

- Output module with 8 outputs 24 V DC
- M12, 5-pin connection technology
- Display of the switching status per channel via LED
- Short circuit and overload detection
- Malfunction display by means of red LED
- Module supports the CPI functionality (only in combination with the CPX CP interface)
- Circumferential labelling with large, hinged inscription label
- Earthing plate and H-rail mounting already integrated

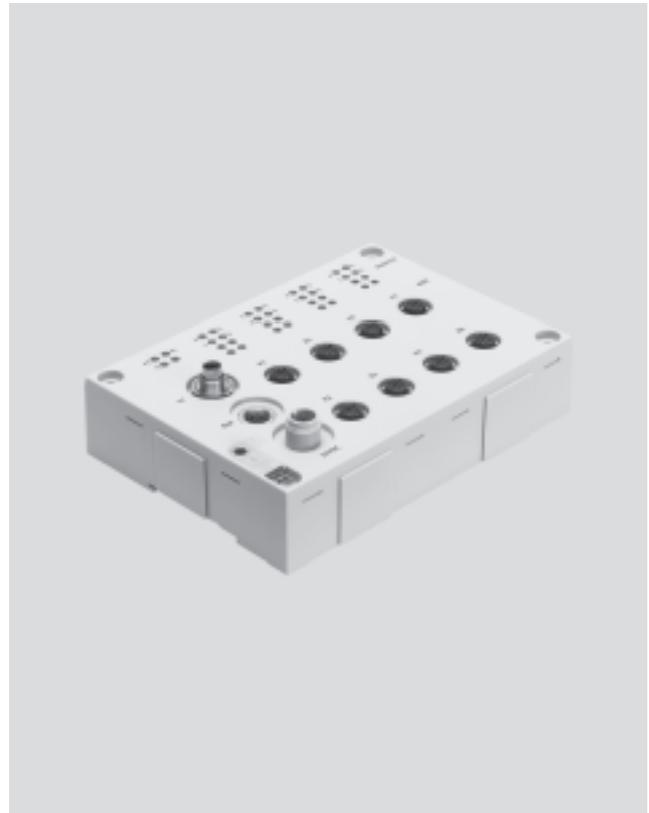

General technical data	
Type	CP-A08-M12-EL-Z positive switching
Part No.	546924
No. of outputs	8
Allocation of outputs	Socket 1, 3, 5 and 7 with double allocation, socket 2, 4, 6 and 8 with single allocation
Sensor connection type	8x M12, 5-pin
Power supply 24 V DC	M12, 5-pin
Intrinsic current consumption at operating voltage	[mA] Typically 35
Max. residual current per module	[A] 4
Max. output current per channel	[A] Max. 0.5, max. 2 outputs can be connected in parallel
Nominal operating voltage	[V DC] 24
Operating voltage range	[V DC] 18 ... 30
Fuse (short circuit)	Internal electronic fuse protection for each channel
Switching logic	PNP
Output characteristic curve	To ICE 11 31-2
Galvanic isolation	None
Connection to bus node	Via pre-assembled cables
Diagnostics	CP communication
	Short circuit/overload per channel
	Undervoltage
Dimensions (LxWxH)	[mm] 143 x 104 x 30
Weight	[g] 260

CPI installation system

Technical data – Output modules CP-A08




Operating conditions		CP-A08-M12-EL-Z
Type		CP-A08-M12-EL-Z
Protection class to EN 60529		IP65 (when fully plugged in or fitted with protective cover)
Ambient temperature	Operation	[°C] -5 ... +50
	Storage	[°C] -20 ... +70
Corrosion resistance class CRC ¹⁾		1
CE mark (see declaration of conformity)		In accordance with EU EMC directive
Certification		cULus listed (OL)

¹⁾ Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Connection and display components

CP-A08-M12-EL-Z

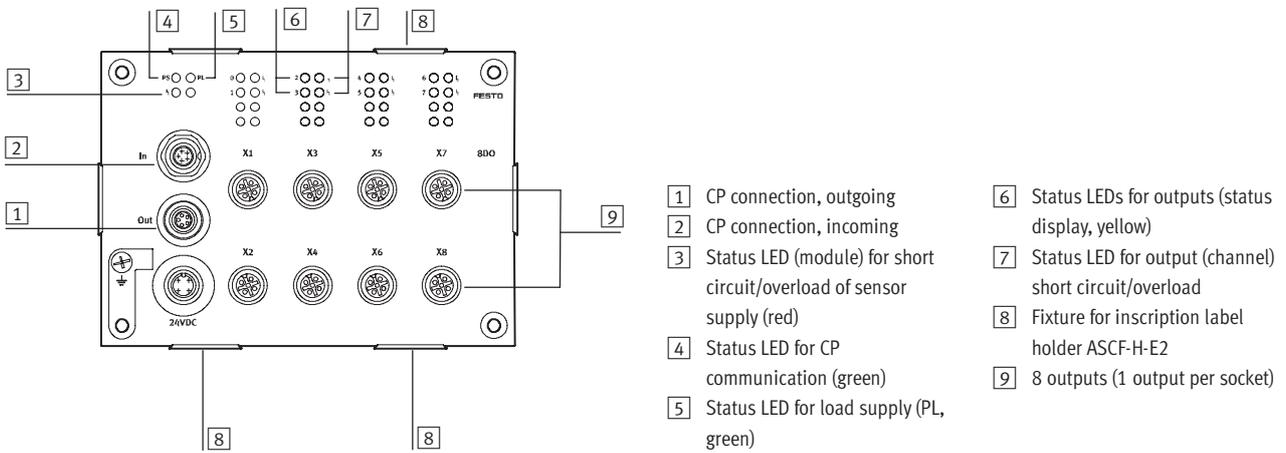

Pin allocation for load voltage connection CP-A08-M12-EL-Z			
Pin allocation	Pin	Signal	Description
	1	n.c.	Not connected
	2	24 V DC ±25%	Operating voltage
	3	0 V	Operating voltage 0 V
	4	FE	Protective earth

CPI installation system

Technical data – Output modules CP-A08



Pin allocation for outputs			
Pin allocation	Output 1, 3, 5 and 7		Description
	Pin	Signal	
CP-A08-M12-EL-Z (odd number of PNP outputs)			
	1	n.c.	Not connected
	2	Ox+1	Connected with pin 4 of output 2
	3	0 V	Reference potential
	4	Ox	Output
	5	FE	Earth terminal
			Note Two outputs can be connected to output sockets 1, 3, 5 and 7 of the CP output module by means of internal connection between pin 2 of the odd numbered output and pin 4 of the underlying even numbered output.

* Ox = Output x

Pin allocation for outputs			
Pin allocation	Output 2, 4, 6 and 8		Description
	Pin	Signal	
CP-A08-M12-EL-Z (even number of PNP outputs)			
	1	n.c.	Not connected
	2	n.c.	Not connected
	3	0 V	Reference potential
	4	Ox+1	Connected with pin 2 of output 1
	5	FE	Earth terminal

* Ox = Output x

CPI installation system

Accessories – Output modules CP-A08

FESTO

Ordering data				
Designation			Type	Part No.
Plug connectors				
	Straight plug, M12	5-pin, PG7	SEA-M12-5GS-PG7	175487
		4-pin, PG7	SEA-GS-7	18666
		4-pin, 2.5 mm ² O.D.	SEA-4GS-7-2,5	192008
	Plug for 2 cables, M12, PG11	4-pin	SEA-GS-11-DUO	18779
		5-pin	SEA-5GS-11-DUO	192010
Connecting cables				
	DUO cable, 1x straight plug M12	2x straight socket M8	KM12-DUO-M8-GDGD	18685
		1x straight socket M8 and 1x angled socket M8	KM12-DUO-M8-GDWD	18688
		2x angled socket M8	KM12-DUO-M8-WDWD	18687
	Connecting cable, M12, 4-pin, straight plug-straight socket	2.5 m	NEBU-M12G4-K-2.5-M12G4 ¹⁾	539052
		5.0 m	NEBU-M12G4-K-5-M12G4 ¹⁾	539052
Inscription label holders				
	Inscription label holders for EL modules, bag of 10		ASCF-H-E2	547473
User documentation				
	User documentation for input/output modules	German	P.BE.-CPEA-CL-DE	539299
		English	P.BE.-CPEA-CL-EN	539300
		French	P.BE.-CPEA-CL-FR	539302
		Italian	P.BE.-CPEA-CL-IT	539303
		Spanish	P.BE.-CPEA-CL-ES	539301
		Swedish	P.BE.-CPEA-CL-SV	539304

1) Modular product, further information → Internet: nebu

CPI installation system

Technical data – Output modules CP-A04

Function

The electrical outputs actuate actuators such as individual valves, lamps, signal equipment and many more.

 Note
Optimum actuation for valves with M12 central plug.

Application

- Output module with 4 outputs 24 V DC
- M12 connection technology, with 5-pin sockets
- LED display of the switching status per channel
- Short circuit and overload detection
- Malfunction display by means of red LED
- Module supports the CPI functionality (only in combination with the CPX CP interface)



General technical data		CP-A04-M12-CL positive switching 538790
Type		CP-A04-M12-CL positive switching 538790
Part No.		538790
No. of outputs		4
Allocation of outputs		Socket 1 and 3 with double allocation, socket 2 and 4 with single allocation
Sensor connection type		4x M12, 5-pin
Power supply 24 V DC		From the bus node, basic unit, CP interface, etc.
Intrinsic current consumption of electronics	[mA]	Typically 35
Max. output current per channel	[A]	Max. 0.5, max. 2 outputs can be connected in parallel
Operating voltage	[V DC]	24 ±25%
Fuse protection for power output		Internal electronic short-circuit protection per output
Switching logic		PNP
Output characteristic curve		To ICE 1131-2
Galvanic isolation		None
Connection to bus node		Via pre-assembled cables
Diagnostics		Undervoltage
		Short circuit at actuator output (per channel)
Material		Polybutylene terephthalate
Dimensions (LxWxD)	[mm]	151 x 30 x 25
Weight	[g]	165

CPI installation system

Technical data – Output modules CP-A04

Operating conditions		CP-A04-M12-CL
Type		CP-A04-M12-CL
Protection class to EN 60529		IP65/IP67 (when fully plugged in or fitted with protective cap)
Ambient temperature	Operation	[°C] -5 ... +50
	Storage	[°C] -20 ... +70
Corrosion resistance class CRC ¹⁾		1
ATEX symbol		II 3D Ex tD A22 IP67 T70°C X
		II 3G Ex nA II T6 X
ATEX ambient temperature	[°C]	-5 ≤ Ta ≤ +50
CE mark (see declaration of conformity)		In accordance with EU EMC directive
Certification		cULus listed (OL)


1) Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

-  - Note

If device combinations are operated in potentially explosive areas, the lowest common zone, the temperature class as well as the ambient temperature of the individual devices determine the possible use of the complete module.

Connection and display components

CP-A04-M12-CL

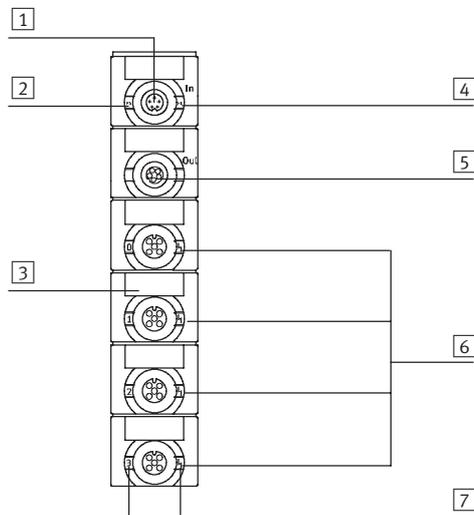

- 1 CP connection, incoming
- 2 Status LED (green)
- 3 Holder for inscription label (IBS 8x20)
- 4 Red LED for short circuit/overload indication
- 5 CP connection, outgoing
- 6 Output
- 7 Green LED for status display (one LED per output)

CPI installation system

Technical data – Output modules CP-A04



Pin allocation for outputs						
Pin allocation	Output 1 and 3		Description	Output 2 and 4		
	Pin	Signal		Pin	Signal	
CP-A08-M12-5POL (PNP outputs)						
	1	n.c.	Not connected	1	n.c.	Note Two outputs can be connected to output sockets 1 and 3 of the CP output module by means of internal connection between pin 2 of the odd numbered output and pin 4 of the underlying even numbered output.
	2	Ox+1	Connected with pin 4 of plug 2/ not connected	2	n.c.	
	3	0 V	Reference potential	3	0 V	
	4	Ox	Output/connected with pin 2 of plug 1	4	Ox+1	
	5	FE	Earth terminal	5	FE	

* Ox = Output x

Ordering data – Accessories				
Designation			Type	Part No.
Sensor plugs				
	Plug, straight socket, M12	5-pin, PG7	SEA-M12-5GS-PG7	175487
		4-pin, PG7	SEA-GS-7	18666
		4-pin, 2.5 mm ² O.D.	SEA-4GS-7-2,5	192008
	Plug for 2 sensor cables, M12, PG11	4-pin	SEA-GS-11-DUO	18779
		5-pin	SEA-5GS-11-DUO	192010
Cables				
	DUO cable	2x straight socket	KM12-DUO-M8-GDGD	18685
		2x straight/angled socket	KM12-DUO-M8-GDWD	18688
		2x angled socket	KM12-DUO-M8-WDWD	18687
	Connecting cable, M12, 4-pin, straight plug-straight socket	2.5 m	KM12-M12-GSGD-2,5	18684
		5.0 m	KM12-M12-GSGD-5	18686
Inscription labels				
	Inscription labels 8x20 mm in frames (20 pieces)		IBS-8x20	539388
User documentation				
	User documentation for input/output modules	German	P.BE.-CPEA-CL-DE	539299
		English	P.BE.-CPEA-CL-EN	539300
		French	P.BE.-CPEA-CL-FR	539302
		Italian	P.BE.-CPEA-CL-IT	539303
		Spanish	P.BE.-CPEA-CL-ES	539301
		Swedish	P.BE.-CPEA-CL-SV	539304

CPI installation system

Technical data – MPA valve terminals



-  - Flow rate
MPA1: Up to 360 l/min
MPA2: Up to 700 l/min
-  - Valve width
MPA1: 10 mm
MPA2: 21 mm
-  - Voltage
24 V DC

CPI interface for communication between an MPA valve terminal and a CPI master. It activates an MPA valve terminal with up to 32 solenoid coils on max. 32 valve positions.



-  - Note

With more than 16 MPA2 solenoid coils an additional electrical supply is absolutely necessary (after 4 electronic modules). Note that without an additional electrical supply maximum 24 solenoid coils may be switched. If more than 24 MPA1 or 12 MPA2 solenoid coils are to be switched simultaneously, an additional supply must be inserted after the third electronic module.

General technical data			
Type	MPA-CPI-VI		
Module No.	546280		
CP interface, incoming	Plug M9, 5-pin		
CP interface, outgoing	Socket M9, 5-pin		
Max. no. of solenoid coils	32		
LED display (product-specific)	PS	Common message regarding power supply	
	PL	Power supply for valves	
	Symbol	Module fault	
Nominal operating voltage	[V]	24 DC	
Operating voltage range	[V]	24 DC ±25%	
Power failure bridging	Logic side only	[ms]	10
Current consumption at nominal operating voltage	Load	[mA]	Dependent on valve type and number of valves
	Electronics	[mA]	Approx. 50 (plus current consumption of electronic modules)
Residual ripple	[Vss]	4	
Materials	Die-cast aluminium, polyamide		
Dimensions	➔ Internet: type 32		
Weight	[g]	200	
Technical data on valves	➔ Internet: type 32		


CPI installation system

Technical data – MPA valve terminals

Operating conditions			
Protection class to EN 60529		IP65 (when fully plugged in or fitted with protective cover)	
Ambient temperature	Operation	[°C]	-5 ... +50
	Storage	[°C]	-20 ... +40
Corrosion resistance class CRC ¹⁾		1	
CE mark (see declaration of conformity)		In accordance with EU EMC directive	
Certification		cULus listed (OL)	

1) Corrosion resistance class 1 to Festo standard 940 070
 Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Connection and display components

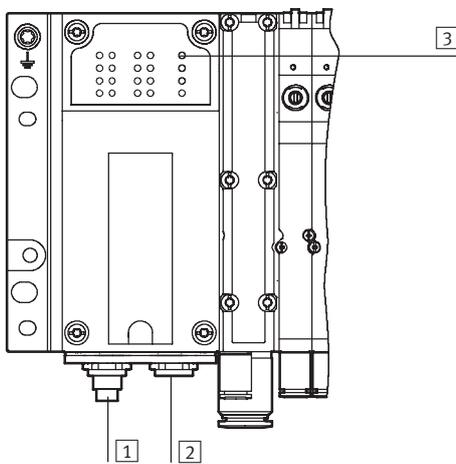

- 1 CP connection, incoming
- 2 CP connection, outgoing
- 3 Status LEDs
 - CP system supply (green)
 - Load supply (green)
 - Module fault (red)

Ordering data – Accessories				
Designation		Type	Part No.	
Valve terminal connection				
	Connecting cable WS-WD	0.25 m	KVI-CP-3-WS-WD-0,25	540327
		0.5 m	KVI-CP-3-WS-WD-0,5	540328
		2 m	KVI-CP-3-WS-WD-2	540329
		5 m	KVI-CP-3-WS-WD-5	540330
		8 m	KVI-CP-3-WS-WD-8	540331
	Connecting cable GS-GD	2 m	KVI-CP-3-GS-GD-2	540332
		5 m	KVI-CP-3-GS-GD-5	540333
		8 m	KVI-CP-3-GS-GD-8	540334

CPI installation system

Technical data – CPV-SC valve terminals

FESTO

-  - Flow rate
170 l/min

-  - Valve width
10 mm

-  - Voltage
24 V DC

CPI interface for communication between a CPV-SC valve terminal and a CPI master. It activates a CPV-SC valve terminal with up to 16 solenoid coils.



General technical data			
Type	CPVSC1-AE16-CPI		
Module No.	541975		
CP interface, incoming	Plug M9, 5-pin		
CP interface, outgoing	Socket M9, 5-pin		
Max. no. of solenoid coils	16		
LED display (product-specific)	Status LED for CP communication Status LEDs for valves		
Nominal operating voltage	[V DC]	24	
Operating voltage range	[V DC]	20.4 ... 26.4	
Power failure bridging	Logic side only	[ms]	10
Current consumption at nominal operating voltage	Load	[mA]	Dependent on valve type and number of valves
	Electronics	[mA]	Max. 100
Materials	Polymer		
Dimensions	➔ Internet: type 80		
Weight	[g]	150	
Technical data on valves	➔ Internet: type 80		

CPI installation system


Technical data – CPV-SC valve terminals



Operating conditions			
Protection class to EN 60529		IP40 (when fully plugged in or fitted with protective cover)	
Ambient temperature	Operation	[°C]	-5 ... +50
	Storage	[°C]	-20 ... +40
Corrosion resistance class CRC ¹⁾		1	
CE mark (see declaration of conformity)		In accordance with EU EMC directive	
Certification		c UL us Recognized (OL)	

¹⁾ Corrosion resistance class 1 to Festo standard 940 070
Components requiring low corrosion resistance. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Connection and display components

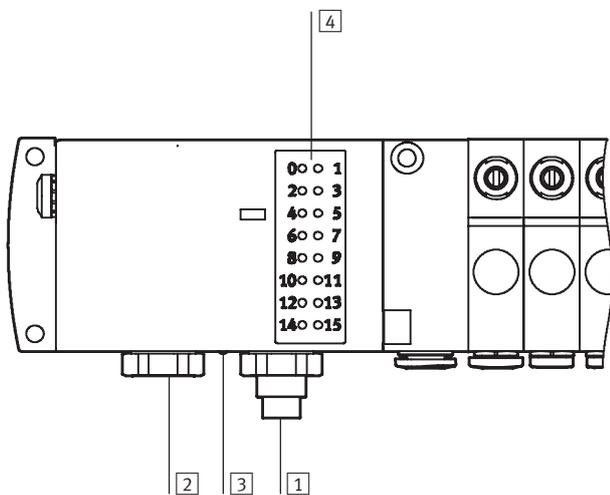

- 1) CP connection, incoming
- 2) CP connection, outgoing
- 3) Status LED for CP communication
- 4) Status LEDs for valves

Ordering data – Accessories				
Designation		Type	Part No.	
Valve terminal connection				
	Connecting cable WS-WD	0.25 m	KVI-CP-3-WS-WD-0,25	540327
		0.5 m	KVI-CP-3-WS-WD-0,5	540328
		2 m	KVI-CP-3-WS-WD-2	540329
		5 m	KVI-CP-3-WS-WD-5	540330
		8 m	KVI-CP-3-WS-WD-8	540331
			Connecting cable GS-GD	2 m
5 m	KVI-CP-3-GS-GD-5			540333
8 m	KVI-CP-3-GS-GD-8			540334

CPI installation system


Technical data

FESTO

Dimensions – Fieldbus node/control block

Download CAD data → www.festo.com

CPX-FB... /CPX-FEC and CPX-CP-4-FB

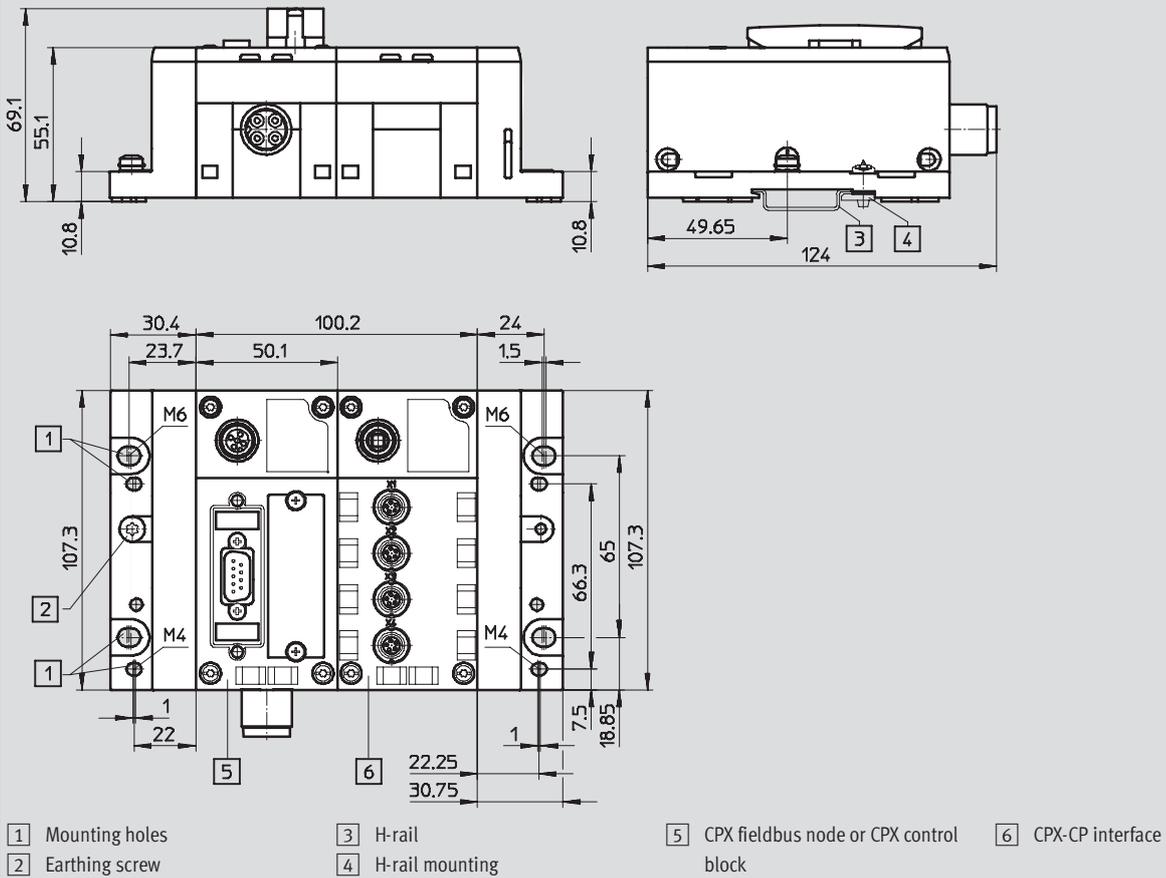


CPI installation system

Technical data

Dimensions

Download CAD data → www.festo.com

Fieldbus node

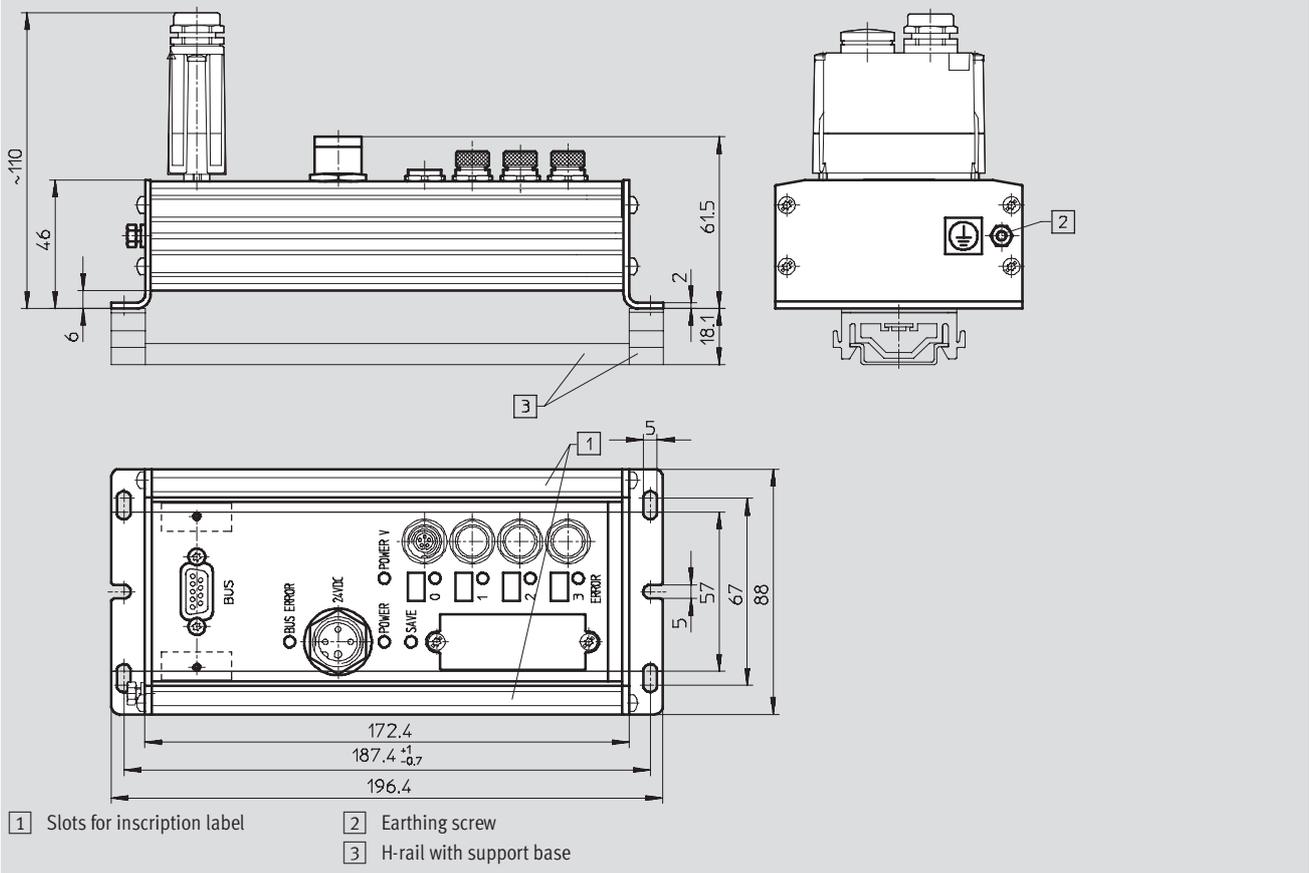

Note

The dimensions are valid for the fieldbus node types:

- CP-FB05-E
- CP-FB06-E
- CP-FB11-E
- CP-FB13-E

Different height ~110 (incl. fieldbus plug) for

- CP-FB06-E with M23
- CP-FB11-E with M12
- CP-FB13-E with 2x M12

CPI installation system


Technical data

FESTO

Dimensions – Sturdy input modules

Download CAD data → www.festo.com

CP-E16-M8

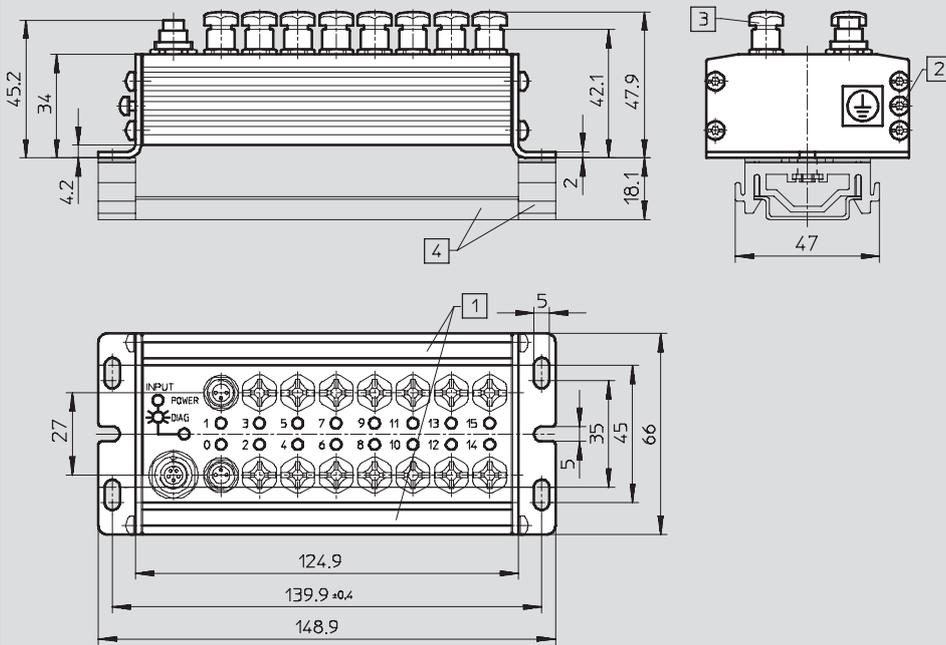


1 Slots for inscription label

2 Earthing screw M3

3 Protective cap (included in scope of delivery)

4 H-rail with support base

CP-E16-M8-Z

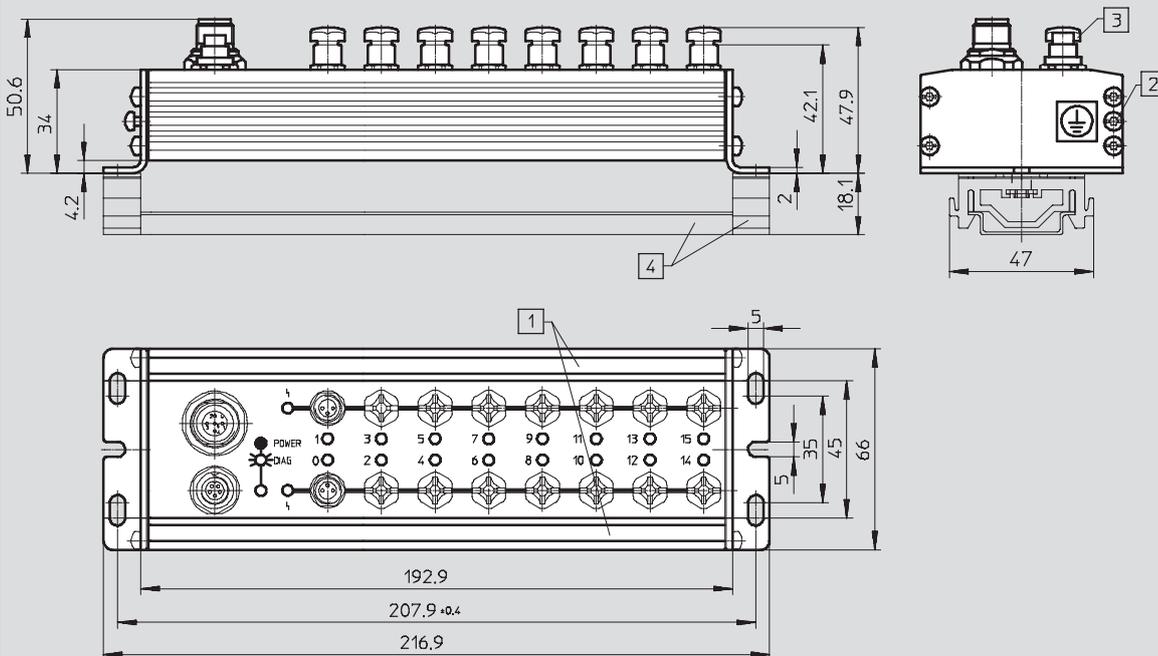

1 Slots for inscription label

2 Earthing screw M3

3 Protective cap (included in scope of delivery)

4 H-rail with support base




CPI installation system

Technical data

Dimensions – Sturdy input modules

Download CAD data → www.festo.com

CP-E16-M12x2-5POL/CP-E16N-M12x2

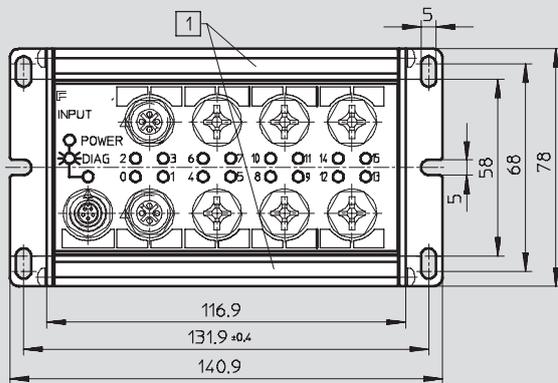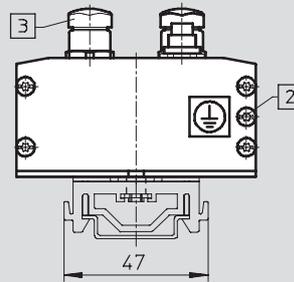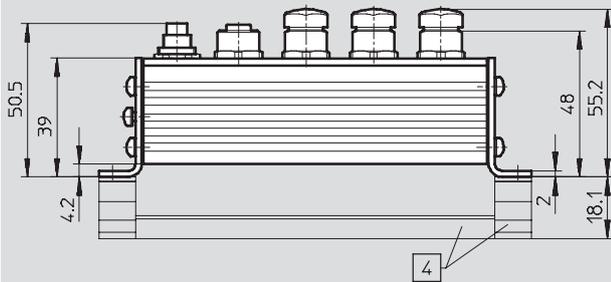

1 Slots for inscription label

2 Earthing screw M3

3 Protective cap (included in scope of delivery)

4 H-rail with support base

CPI installation system



Technical data

FESTO

Dimensions – Economical input modules



Download CAD data → www.festo.com

CP-E16-M8-EL

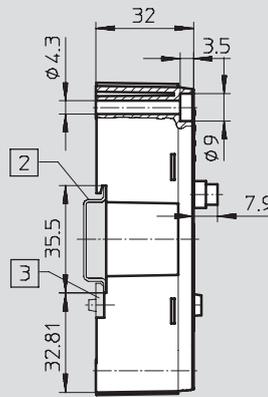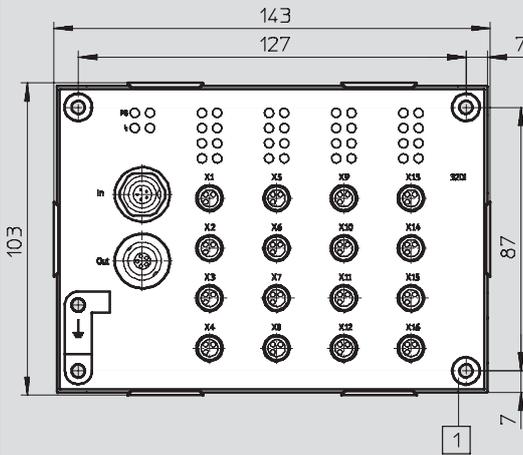



- 1 Through-hole for surface mounting
- 2 H-rail
- 3 Mounting kit for H-rail (included in the scope of delivery)

CP-E16-M12-EL

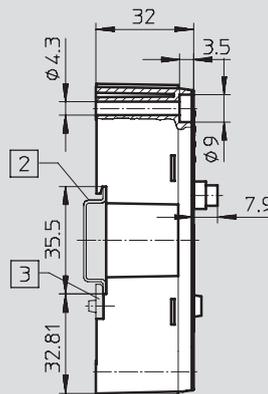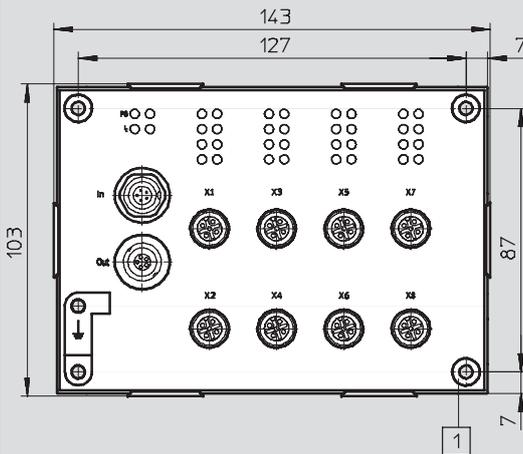

- 1 Through-hole for surface mounting
- 2 H-rail
- 3 Mounting kit for H-rail (included in the scope of delivery)

CP-E32-M8-EL

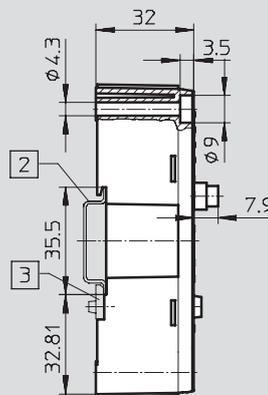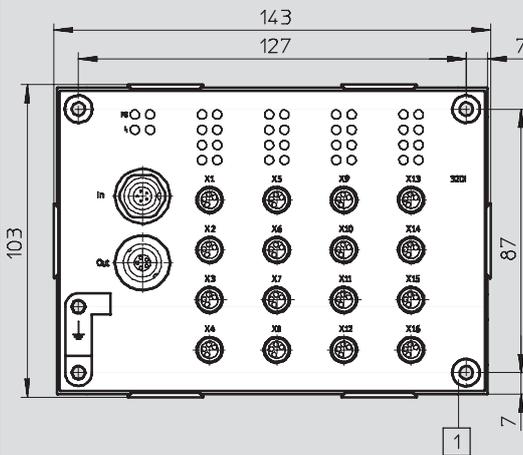

- 1 Through-hole for surface mounting
- 2 H-rail
- 3 Mounting kit for H-rail (included in the scope of delivery)


CPI installation system

Technical data

Dimensions – Sturdy output modules

Download CAD data → www.festo.com


CP-A08-M12-5/CP-A08N-M12

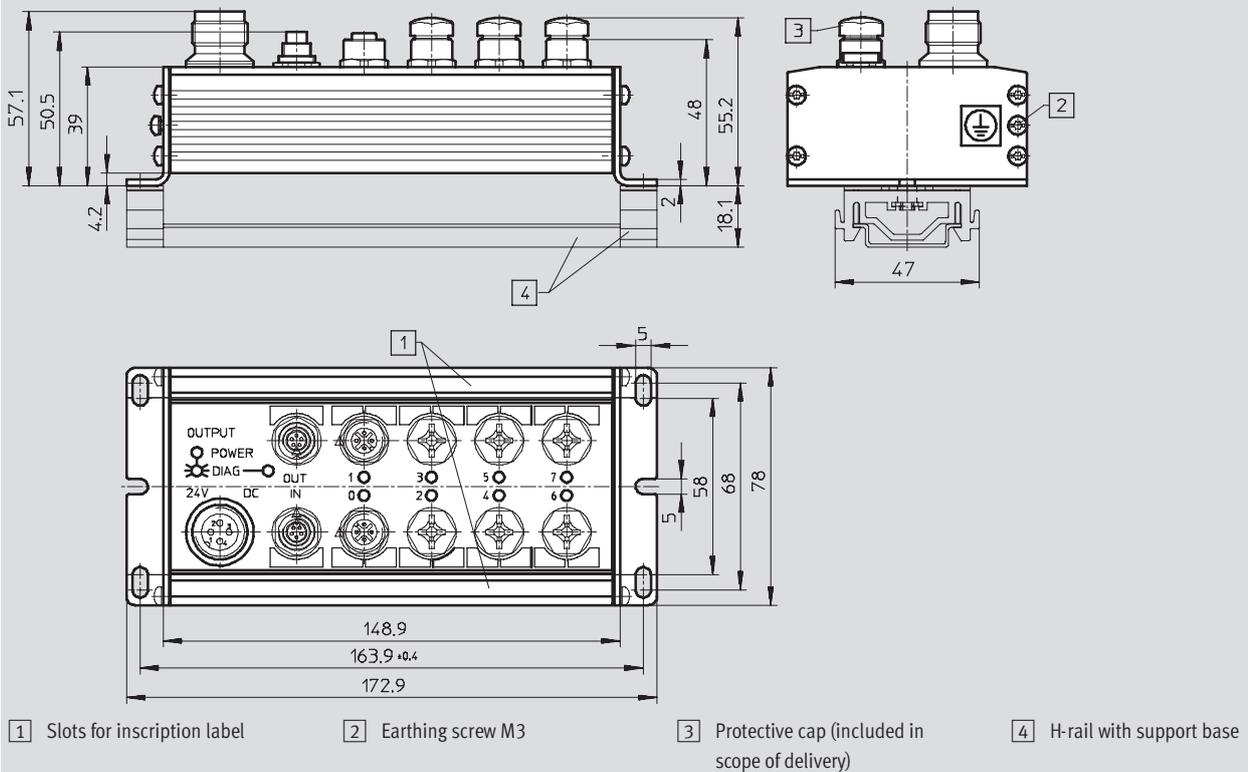

Dimensions – Economical output module

Download CAD data → www.festo.com

CP-A08-M12-EL-Z

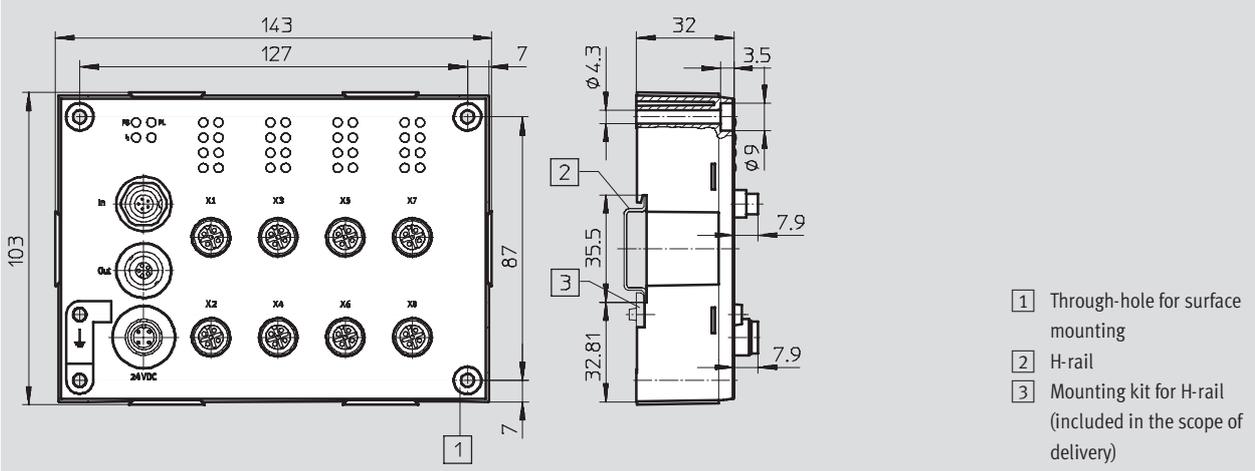

CPI installation system


Technical data

FESTO


Dimensions – Compact CP modules

Download CAD data → www.festo.com


CP-E08-M12-CL/CP-A04-M12-CL

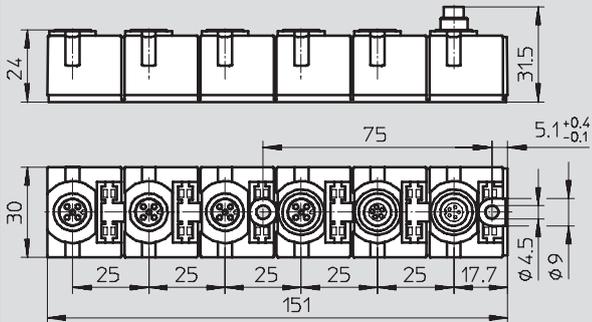

CP-E08-M8-CL

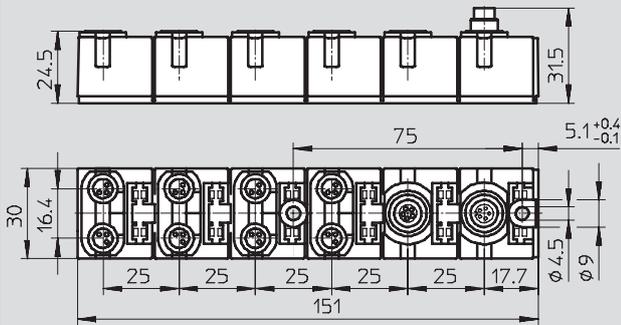

CP-E16-KL-CL

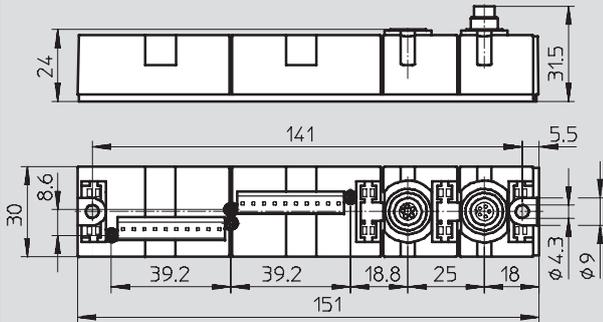

CPI installation system

Order processing information

Configuration guidelines

The CPI system supports a certain number of modules per CP string depending on the type of the CP

master and the CP modules connected.

CP masters and CP modules can be split into two different groups:

- With CPI functionality
- Without CPI functionality

CP modules with CPI functionality

CP modules with CPI functionality offer the following features:

- Incoming and outgoing CP interface
- Any arrangement of the modules within a CP string

- Max. 4 modules per CP string
- Max. 32 inputs and outputs can be connected to each string depending on the version

CP modules without CPI functionality

Sturdy CP modules offer the following features:

- CP valve terminals and CP output modules have an incoming and outgoing CP interface
- CP input modules only have an incoming CP interface and therefore

can only be positioned at the end of a CP string

- All CP modules with CPI functionality can also be connected to CP masters without extended functionality

Information on using CP modules with and without CPI functionality

A mixture of CP modules with and without CPI functionality is possible. The following must be noted in this regard:

- Only one input module without CPI functionality is possible per CP string (at the end of a CP string)

- Only one CP valve terminal or output module without CPI functionality is possible per CP string (any point in the CP string)

- Free positions in the CP string can be filled by CP modules with CPI functionality (max. 4 modules)

Note

The cable length for any given string may not exceed 10 m.

Connecting cables are available in lengths of 0.25 m, 0.5 m, 2 m, 5 m and 8 m

→ 90

The maximum number of inputs and outputs that can be connected is 32 each (sum of all CP modules on a CP string), regardless of the type of CP module (with or without CPI functionality).

Order processing

There are two ways of placing an order for the electrical CPI installation system:

- By completing the order form on the following pages
- Digitally using the valve terminal configurator

Please note that the CP strings must be allocated in ascending numerical order, i.e. starting with string 1, followed by string 2, etc. without omitting any numbers.

To correctly allocate a CP string, proceed as follows:

- First select a connecting cable of appropriate length.
- Then select an input/output module.
- Continue in this way until the string is fully allocated (max. 4 strings for CP modules with extended functionality).




The valve terminals are configured separately:

- CPV valve terminal
CPV10/14/18-VI-FB-....
→ Internet: type 10
- MPA valve terminals
MPA-CPI-VI
→ Internet: type 32
- CPV-SC valve terminals
CPVSC1-AE16-CPI
→ Internet: type 80
- CPA valve terminals
CPA10/14-IFB-CP-....
→ Internet: type 12

CPI installation system

Accessories





FESTO

Ordering data				
Designation			Type	Part No.
Plug connectors – Power supply				
	Power supply socket, straight, M18x1, 4-pin	for 1.5 mm ²	NTSD-GD-9	18493
		for 2.5 mm ²	NTSD-GD-13,5	18526
	Power supply socket, angled, M18x1, 4-pin	for 1.5 mm ²	NTSD-WD-9	18527
		for 2.5 mm ²	NTSD-WD-11	533119
	Power supply socket for CPX system supply	7/8" connection, 5-pin	NECU-G78G5-C2	543107
		7/8" connection, 4-pin	NECU-G78G4-C2	543108
Connection sets for power supply and sensors				
	Plug, screw-in tension-spring socket	3-row, 30-pin	PS1 SAC30	197161
	Plug, screw-in tension-spring socket with LED	3-row, 30-pin	PS1-SAC31-30POL+LED	197162
Sensor plugs				
	Plug M12, straight socket	5-pin, PG7	SEA-M12-5GS-PG7	175487
		4-pin, PG7	SEA-GS-7	18666
		4-pin, 2.5 mm ² O.D.	SEA-4GS-7-2,5	192008
	Plug M8, straight	3-pin, solderable	SEA-GS-M8	18696
		3-pin, screw-in	SEA-3GS-M8-S	192009
	Plug M12 for 2 sensor cables, PG11	4-pin	SEA-GS-11-DUO	18779
		5-pin	SEA-5GS-11-DUO	192010
	Push-in T-connector	2x socket M8, 3-pin 1x plug M8, 4-pin	NEDU-M8D3-M8T4	544391
	Push-in T-connector	2x socket M12, 5-pin 1x plug M12, 4-pin	NEDU-M12D5-M12T4	541596

CPI installation system

Accessories




FESTO

Ordering data				
Designation			Type	Part No.
Plug connectors – Fieldbus connection				
	Sub-D plug for INTERBUS	Incoming	FBS-SUB-9-BU-IB-B	532218
		Outgoing	FBS-SUB-9-GS-IB-B	532217
	Sub-D plug for DeviceNet/CANopen		FBS-SUB-9-BU-2x5POL-B	532219
	Sub-D plug for Profibus DP		FBS-SUB-9-GS-DP-B	532216
	Sub-D plug for CC-Link		FBS-SUB-9-GS-2x4POL-B	532220
Sub-D plug		FBS-SUB-9-GS-1x9POL-B	534497	
	Bus connection M12, 5-pin, adapter (B-coded) for Profibus DP		FBA-2-M12-5POL-RK	533118
	Bus connection Micro Style 2xM12, 5-pin, for DeviceNet/CANopen		FBA-2-M12-5POL	525632
	Socket M12, 5-pin, for Micro Style connection		FBSD-GD-9-5POL	18324
	Plug M12, 5-pin, for Micro Style connection		FBS-M12-5GS-PG9	175380
	Bus connection M12x1, 4-pin (D-coded) for Ethernet		NECU-M-S-D12G4-C2-ET	543109
	Connection block M12 adapter (B-coded) for Profibus DP		CPX-AB-2-M12-RK-DP	541519
	Connection block M12 adapter (B-coded) for INTERBUS		CPX-AB-2-M12-RK-IB	534505
	Bus connection Open Style for 5-pin terminal strip for DeviceNet/CANopen		FBA-1-SL-5POL	525634
	Bus connection 5-pin terminal strip for DeviceNet/CANopen		FBSD-KL-2x5POL	525635
	Bus connection screw terminal for CC-Link		FBA-1-KL-5POL	197962
	RJ45/plug		FBS-RJ45-8-GS	534494
Accessories – Fieldbus connection				
	Threaded sleeve, 4 pieces		UNC4-40/M3x6	533000
	Cover for CPX-AB-8-KL-4POL (IP65/67) – 8 cable through-feeds M9 – 1 cable through-feed for multi-pin plug		AK-8KL	538219
	Screening plate for M12 connections		CPX-AB-S-4-M12	526184
	Earthing element for right-hand/left-hand end plates (5 pieces)		CPX-EPFE-EV	538892

CPI installation system

Accessories




FESTO

Ordering data				
Designation			Type	Part No.
Connecting cables				
	DUO cable M12-2xM8, 4-pin/2x3-pin	2x straight socket	KM12-DUO-M8-GDGD	18685
		2x straight/angled socket	KM12-DUO-M8-GDWD	18688
		2x angled socket	KM12-DUO-M8-WDWD	18687
	Connecting cable M8-M8, straight plug-straight socket	0.5 m	KM8-M8-GSGD-0,5	175488
		1.0 m	KM8-M8-GSGD-1	175489
		2.5 m	KM8-M8-GSGD-2,5	165610
		5.0 m	KM8-M8-GSGD-5	165611
	Extension cable M12-M12, 5-pin, straight plug-straight socket	1.5 m	KV-M12-M12-1,5	529044
		3.5 m	KV-M12-M12-3,5	530901
Connecting cable M12-M12, 4-pin, straight plug-straight socket	2.5 m	KM12-M12-GSGD-2,5	18684	
	5.0 m	KM12-M12-GSGD-5	18686	
	Connecting cable M12-M12, 4-pin, straight plug-angled socket	1.0 m	KM12-M12-GSWD-1-4	185499
	Modular system for connecting cables		NEBU-... → Internet: nebu	-
	Programming cable		KDI-PPA-3-BU9	151915
	Connecting cable FED, pre-assembled at one end		FEC-KBG7	539642
	Connecting cable FED, pre-assembled at both ends		FEC-KBG8	539643
Connecting cable – CP modules				
	Connecting cable WS-WD, angled plug-angled socket	0.25 m	KVI-CP-3-WS-WD-0,25	540327
		0.5 m	KVI-CP-3-WS-WD-0,5	540328
		2 m	KVI-CP-3-WS-WD-2	540329
		5 m	KVI-CP-3-WS-WD-5	540330
		8 m	KVI-CP-3-WS-WD-8	540331
	Connecting cable GS-GD, straight plug-straight socket	2 m	KVI-CP-3-GS-GD-2	540332
		5 m	KVI-CP-3-GS-GD-5	540333
		8 m	KVI-CP-3-GS-GD-8	540334
	Connector plug for CP cable (control cabinet implementation)		KVI-CP-3-SSD	543252

CPI installation system

Accessories

FESTO

Ordering data				
Designation	Type	Part No.		
Protective caps				
	Inspection cover, transparent	AK-SUB-9/15-B	533334	
	Cover for RJ45 connection	AK-Rj45	534496	
	Protective cap for sealing unused sockets (10 pieces)	for M8 connections	ISK-M8	177672
		M9	FLANSCHDOSE SER.712	356684
		for M12 connections	ISK-M12	165592
Mounting attachments				
	Retainer CPX-MMI	CPX-MMI-1-H	534705	
	Mounting for H-rail, CPX-MMI	CPX-MMI-1-NRH	536689	
	Mounting for H-rail, CP modules	CP-TS-HS35	170169	
	Mounting for H-rail	IBGH-03-4,0	18649	
Inscription labels				
	Inscription labels 6x10 mm in frames (64 pieces)	IBS-6x10	18576	
	Inscription labels 8x20 mm in frames (20 pieces) for compact modules (CP-...-CL)	IBS-8x20	539388	
	Inscription label holders for EL modules, bag of 10	ASCF-H-E2	547473	

CPI installation system

Accessories

FESTO

Ordering data – Documentation				
Designation		Type	Part No.	
	User documentation for bus node CPX-FB6	German	P.BE-CPX-FB6-DE	526433
		English	P.BE-CPX-FB6-EN	526434
		Spanish	P.BE-CPX-FB6-ES	526435
		French	P.BE-CPX-FB6-FR	526436
		Italian	P.BE-CPX-FB6-IT	526437
		Swedish	P.BE-CPX-FB6-SV	526438
	User documentation for bus node CPX-FB11	German	P.BE-CPX-FB11-DE	526421
		English	P.BE-CPX-FB11-EN	526422
		Spanish	P.BE-CPX-FB11-ES	526423
		French	P.BE-CPX-FB11-FR	526424
		Italian	P.BE-CPX-FB11-IT	526425
		Swedish	P.BE-CPX-FB11-SV	526426
	User documentation for bus node CPX-FB13	German	P.BE-CPX-FB13-DE	526427
		English	P.BE-CPX-FB13-EN	526428
		Spanish	P.BE-CPX-FB13-ES	526429
		French	P.BE-CPX-FB13-FR	526430
		Italian	P.BE-CPX-FB13-IT	526431
		Swedish	P.BE-CPX-FB13-SV	526432
	User documentation for bus node CPX-FB14	German	P.BE-CPX-FB14-DE	526409
		English	P.BE-CPX-FB14-EN	526410
		Spanish	P.BE-CPX-FB14-ES	526411
		French	P.BE-CPX-FB14-FR	526412
		Italian	P.BE-CPX-FB14-IT	526413
		Swedish	P.BE-CPX-FB14-SV	526414
	User documentation for bus node CPX-FB23	German	P.BE-CPX-FB23-DE	526403
		English	P.BE-CPX-FB23-EN	526404
	User documentation for bus node CPX-FB32	German	P.BE-CPX-FB32-DE	693134
		English	P.BE-CPX-FB32-EN	693135
Spanish		P.BE-CPX-FB32-ES	693136	
French		P.BE-CPX-FB32-FR	693137	
Italian		P.BE-CPX-FB32-IT	693138	
Swedish		P.BE-CPX-FB32-SV	693139	
User documentation for bus node CPX-FB33	German	P.BE-CPX-PNIO-DE	548759	
	English	P.BE-CPX-PNIO-EN	548760	
	Spanish	P.BE-CPX-PNIO-ES	548761	
	French	P.BE-CPX-PNIO-FR	548762	
	Italian	P.BE-CPX-PNIO-IT	548763	
	Swedish	P.BE-CPX-PNIO-SV	548764	
User documentation for control block CPX-FEC	German	P.BE-CPX-FEC-DE	538474	
	English	P.BE-CPX-FEC-EN	538475	
	Spanish	P.BE-CPX-FEC-ES	538476	
	French	P.BE-CPX-FEC-FR	538477	
	Italian	P.BE-CPX-FEC-IT	538478	
	Swedish	P.BE-CPX-FEC-SV	538479	

CPI installation system

Accessories

FESTO

Ordering data – Documentation				
Designation			Type	Part No.
	User documentation for CPX CP interface	German	P.BE-CPX-CP-DE	539293
		English	P.BE-CPX-CP-EN	539294
		Spanish	P.BE-CPX-CP-ES	539295
		French	P.BE-CPX-CP-FR	539296
		Italian	P.BE-CPX-CP-IT	539297
		Swedish	P.BE-CPX-CP-SV	539298
	User manual for operator unit CPX-MMI-1	German	P.BE-CPX-MMI-1-DE	534824
		English	P.BE-CPX-MMI-1-EN	534825
		French	P.BE-CPX-MMI-1-FR	534827
		Italian	P.BE-CPX-MMI-1-IT	534828
		Swedish	P.BE-CPX-MMI-1-SV	534829
		Spanish	P.BE-CPX-MMI-1-ES	534826
	User documentation for sturdy input/output modules	German	P.BE.-CPEA-DE	165125
		English	P.BE.-CPEA-EN	165225
		French	P.BE.-CPEA-FR	165127
		Italian	P.BE.-CPEA-IT	165157
		Spanish	P.BE.-CPEA-ES	165227
		Swedish	P.BE.-CPEA-SV	165257
	User documentation for compact input/output modules	German	P.BE.-CPEA-CL-DE	539299
		English	P.BE.-CPEA-CL-EN	539300
		French	P.BE.-CPEA-CL-FR	539302
Italian		P.BE.-CPEA-CL-IT	539303	
Spanish		P.BE.-CPEA-CL-ES	539301	
Swedish		P.BE.-CPEA-CL-SV	539304	
System description	German	P.BE-CPSYS-DE	165126	
	English	P.BE-CPSYS-EN	165226	
	French	P.BE-CPSYS-FR	165128	
	Italian	P.BE-CPSYS-IT	165158	
	Spanish	P.BE-CPSYS-ES	165228	
	Swedish	P.BE-CPSYS-SV	165258	
Software				
	Programming software	German	FST4.1DE	537927
		English	FST4.1GB	537928

What must be observed when using Festo components?

Specified limit values for technical data and any specific instructions must be adhered to by the user in order to ensure recommended operating conditions.

When pneumatic components are used, the user shall ensure that they are operated using correctly prepared compressed air without aggressive media.

When Festo components are used in safety-oriented applications, the user shall ensure that all applicable

national and local safety laws and regulations, for example the machine directive, together with the relevant references to standards are observed. Unauthorised conversions or modifications to products and systems from Festo involve a safety risk and are thus not permissible.

Festo does not accept any liability for resulting damages.

You should contact Festo's advisors if one of the following apply to your application:

- The ambient conditions and conditions of use or the operating medium differ from the specified technical data.
- The product is to perform a safety function.
- A risk or safety analysis is required.
- You are unsure about the product's suitability for use in the planned application.
- You are unsure about the product's suitability for use in safety-oriented applications.

All technical data applies at the time of going to print.

All texts, representations, illustrations and drawings included in this catalogue are the intellectual property of Festo AG & Co. KG, and are protected by copyright law.

All rights reserved, including translation rights. No part of this publication may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying or otherwise, without the prior written permission of Festo AG & Co. KG. All technical data subject to change according to technical update.