


TECHNICAL SPECIFICATIONS, DESCRIPTIONS and GENERAL FEATURES

- **Fluids:** Valves are suitable for water, low viscosity oils etc... non-aggressive liquids and Air, Inert Gas etc... gaseous but is not suitable for hazardous fluids
- **Switching Function:** Normally Closed (N.C, Closed when de-energised) (ESV 100 Series) and Normally Open (N.O, Open when de-energised) (ESV 101 Series)
- **Principle of Operation:** Pilot Operated
- **Way Number:** 2/2 (Ports / Positions)
- **Connection and Port Sizes:** G1/8" up to G2"
- **Connection Type:** Thread (Female), G (BSPP / ISO 228-1)
- **Pressure Range:** 0,35 -16 Bar (1/8" up to 1" ESV 100 Series) , 0,5 -12 Bar (1/4" up to 2" ESV 100 Series) , 0,35 -12 Bar (1/8" up to 1" ESV 101 Series) , 0,5 -10 Bar (1/4" up to 2" ESV 101 Series)
- **Fluid Temperature:** -10°C to max. 80°C
- **Ambient Temperature:** -20°C to max. 70°C
- **Opening Time:** 200ms up to 1500ms
- **Closing Time:** 500ms up to 2000ms
- **Max Viscosity:** 38 cSt or mm²/s
- Maximum Allowable Pressure or Design Pressure: 24 bar (ESV 100 Series), 18 Bar (ESV 101 Series)
- Minimum operating differential pressure : 0,35 Bar (For 1/8" up to 1") and 0,5 Bar (For 1/4" up to 2"), (internal exhaust system (for ESV 101 Series)
- Valve has sealing o-rings
- Suitable AC and DC voltage, high voltage tolerance
- Coil interchangeable without dismantling the valve (don't matter AC or DC)
- High flow rate, high reliability, high mechanical strength
- Various flow rate options, wide range of orifice options
- Mounting position, optional any position but preferably solenoid coil vertical on top
- The fluid passing through the valve must be filtered
- Flow rate (Q) can be usually calculated as a function of pressure, density and flow coefficient
- According 97/23/EC Pressure Equipment Directive (PED), 2006/95/EEC Low Voltage Directive (LVD) and 2004/108/EC Electromagnetic Compatibility Directive (EMC)



| | | | |
|----------------|---|---------------------|------------------|
| Low Power Loss | Min. Ope Differential Pressure 0,35/0,5 Bar | Coil Rotatable 360° | High Reliability |
| Full Orifice | Patented Enclosing Tube Design | High Performance | Long Life |

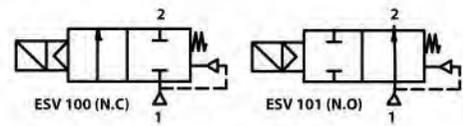

| Model No | Position | Connection and Port Size | Drift Size | Flow Factor / Coefficient Kv | Operating Pressure Differential | | | | Fluid Temperature | | Seal | Approximate Weight | Reference Figure |
|----------------|----------|--------------------------|------------|------------------------------|---------------------------------|---------------|---------------|---------------|-------------------|---------|------|--------------------|------------------|
| | | | | | Min. (For AC) | Min. (For DC) | Max. (For AC) | Max. (For DC) | Min. °C | Max. °C | | | |
| ESV | | G | mm | L/m | m ³ /h | Bar | Bar | Bar | Bar | °C | °C | kg | |
| ESV 100.02 | N.C | 3/8" | 12 | 40 | 2.40 | 0.35 | 0.35 | 16 | 16 | -10 | 80 | 0.62 | Fig.1 |
| ESV 100.03 | N.C | 1/2" | 15 | 70 | 4.20 | 0.35 | 0.35 | 16 | 16 | -10 | 80 | 0.58 | Fig.1 |
| ESV 100.04 | N.C | 3/4" | 20 | 130 | 7.80 | 0.35 | 0.35 | 16 | 16 | -10 | 80 | 0.74 | Fig.1 |
| ESV 100.05 | N.C | 1" | 25 | 180 | 10.80 | 0.35 | 0.35 | 16 | 16 | -10 | 80 | 1 | Fig.1 |
| ESV 100.06 | N.C | 1 1/4" | 32 | 380 | 22.80 | 0.5 | 0.5 | 12 | 12 | -10 | 80 | 2.95 | Fig.2 |
| ESV 100.07 | N.C | 1 1/2" | 40 | 480 | 28.80 | 0.5 | 0.5 | 12 | 12 | -10 | 80 | 2.85 | Fig.2 |
| ESV 100.08 | N.C | 2" | 50 | 600 | 36.00 | 0.5 | 0.5 | 12 | 12 | -10 | 80 | 3.3 | Fig.2 |
| ESV 101.02 | N.O | 3/8" | 12 | 40 | 2.40 | 0.35 | 0.35 | 12 | 12 | -10 | 80 | 0.65 | Fig.1 |
| ESV 101.03 | N.O | 1/2" | 15 | 70 | 4.20 | 0.35 | 0.35 | 12 | 12 | -10 | 80 | 0.61 | Fig.1 |
| ESV 101.04 | N.O | 3/4" | 20 | 130 | 7.80 | 0.35 | 0.35 | 12 | 12 | -10 | 80 | 0.75 | Fig.1 |
| ESV 101.05 | N.O | 1" | 25 | 180 | 10.80 | 0.35 | 0.35 | 12 | 12 | -10 | 80 | 1.03 | Fig.1 |
| ESV 101.06 | N.O | 1 1/4" | 32 | 380 | 22.80 | 0.5 | 0.5 | 10 | 10 | -10 | 80 | 2.98 | Fig.2 |
| ESV 101.07 | N.O | 1 1/2" | 40 | 480 | 28.80 | 0.5 | 0.5 | 10 | 10 | -10 | 80 | 2.88 | Fig.2 |
| ESV 101.08 | N.O | 2" | 50 | 600 | 36.00 | 0.5 | 0.5 | 10 | 10 | -10 | 80 | 3.33 | Fig.2 |
| ESV 100.00.120 | N.C | 1/8" | 12 | 20 | 1.20 | 0.35 | 0.35 | 16 | 16 | -10 | 80 | 0.67 | Fig.1 |
| ESV 100.01.120 | N.C | 1/4" | 12 | 25 | 1.50 | 0.35 | 0.35 | 16 | 16 | -10 | 80 | 0.65 | Fig.1 |
| ESV 101.00.120 | N.O | 1/8" | 12 | 20 | 1.20 | 0.35 | 0.35 | 12 | 12 | -10 | 80 | 0.7 | Fig.1 |
| ESV 101.01.120 | N.O | 1/4" | 12 | 25 | 1.50 | 0.35 | 0.35 | 12 | 12 | -10 | 80 | 0.68 | Fig.1 |

OPTIONS

- Custom options can be performed for customer's special requests
- On request; NPT (ANSI 1.20.3), R (BSPT / ISO 7-1), W (BSW / Whitworth), M (Metric) etc...
- On request; diaphragm or sealing or o-rings can be FPM (VITON) (-10°C to 160°C), EPDM (-10°C to 140°C)
- On request; various body surface coating, nickel plated body, different body materials, internal parts stainless steel (for ESV101), manual override, seat can be stainless steel, filter, other pipe connections, flanged connection
- On request; other special supply voltages, frequencies (60 Hz), other power, coil insulation class : F (155°C), coil duty latching model
- On request; with electronic timer, Explosion-Proof coil for use in zones 1/21-2/22 (Eex em II T4/T5), coil encapsulation material can be fiber glass reinforced (V0 or V1)
- On request; connector with LED or without connector, connector with visual indication and peak voltage suppression, connector with cable length of 2m, Spade plug (Cable Ø 8-10 mm), connector non-flammable
- On request other versions

POWER CONSUMPTION

| Power Consumption | | | | | | | |
|--------------------------|---------|-------------|--------------|---------------------|---------|----------|---------|
| Alternating Current (AC) | | | | Direct Current (DC) | | | |
| Model No | Voltage | Inrush (VA) | Holding (VA) | Model No | Voltage | Cold (W) | Hot (W) |
| ECO 10.AC.012 | 12V | 30 | 18 | ECO 10.DC.012 | 12V | 16 | 12 |
| ECO 10.AC.024 | 24V | 30 | 18 | ECO 10.DC.024 | 24V | 16 | 12 |
| ECO 10.AC.048 | 48V | 30 | 18 | ECO 10.DC.048 | 48V | 16 | 12 |
| ECO 10.AC.110 | 110V | 30 | 18 | ECO 10.DC.110 | 110V | 16 | 12 |
| ECO 10.AC.230 | 230V | 30 | 18 | ECO 10.DC.230 | 230V | 16 | 12 |

DIMENSIONS (mm)

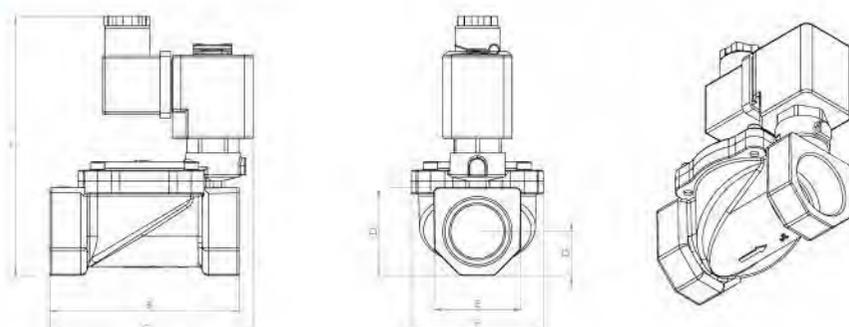


Fig. 1

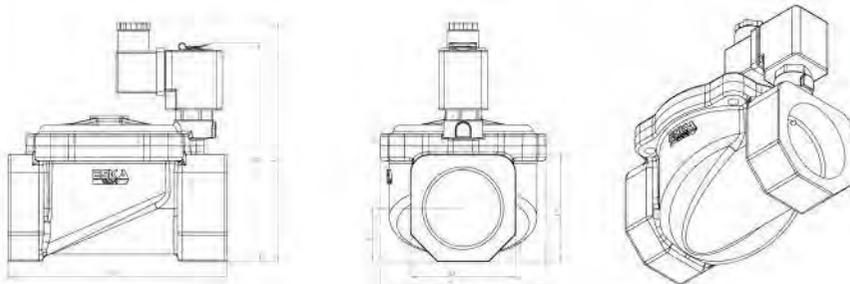


Fig. 2

| Size | A | B | C | D | E | F | G |
|------|-------|----|------|------|------|------|------|
| 1/8" | 105.3 | 69 | 76.5 | 26.8 | 26.9 | 44 | 13.4 |
| 1/4" | 105.3 | 69 | 76.5 | 26.8 | 26.9 | 44 | 13.4 |
| 3/8" | 105.3 | 69 | 76.5 | 26.8 | 26.9 | 44 | 13.4 |
| 1/2" | 105.3 | 69 | 76.5 | 26.8 | 26.9 | 44 | 13.4 |
| 3/4" | 107.8 | 80 | 86.8 | 31.8 | 31.9 | 53.8 | 15.3 |
| 1" | 120.3 | 89 | 95.3 | 40.9 | 40.7 | 62 | 20.5 |

| Size | A | B | C | D | E | F |
|--------|-----|-----|-----|----|-----|----|
| 1 1/4" | 110 | 117 | 130 | 48 | 74 | 24 |
| 1 1/2" | 140 | 127 | 140 | 56 | 98 | 28 |
| 2" | 145 | 143 | 156 | 70 | 110 | 35 |

ELECTRICAL CHARACTERISTICS

- **Protection Degree:** IP 65 (EN 60529) [with connector]
- **Plug Connection:** DIN 46340-3 poles connectors (DIN 43650)
- **Connector Specification:** ISO 4400 / EN 175301-803 . Form A, Spade plug (Cable Ø 6-8 mm)
- **Electrical Safety:** IEC 335, EN 60335-1, EN 60204-1
- **Coil Insulation Class:** H (180°C)
- **Coil Impregnation:** Polyester Fiber-Resin Glass
- **Coil Encapsulation Material:** Fiber Glass Reinforced (V2)
- **Supply Voltages:** For AC (-) 12V, 24V, 48V, 110V, 230V
For DC (=) 12V, 24V, 48V, 110 V, 230 V
- **Voltage Tolerances:** For AC (-) or DC (=) % -10 ; % +10
- **Frequency:** 50 Hz
- **Coil Duty Cycle:** %100 ED, Continuously Rated
- Design according to DIN VDE 0580

MATERIALS

- **Body:** Brass
- **Plunger Seal:** NBR
- **Enclosing Tube:** Stainless Steel (AISI 430FR and AISI 304) for ESV 100 Series, Stainless Steel (AISI 430FR and AISI 304) and Brass for ESV 101 Series
- **Plunger:** Stainless Steel (AISI 430FR)
- **Springs:** Stainless Steel (AISI 302)
- **Shading Ring:** Copper
- **Seat:** Brass
- **O-rings:** NBR
- **Internal Metal Parts:** Stainless Steel and Brass
- **Cover:** Brass
- **Diaphragm/Seat Seal:** NBR
- **Cover Screws:** Stainless Steel