

Isolating Switching Amplifier

MK13-22Ex0-R/24VDC

MK13-22Ex0-R/230VAC

2-channel

1



- 2-channel isolating switching amplifier**
- Intrinsically safe input circuit EEx ia**
- Area of application according to ATEX: II (1) G**
- Galvanic isolation between input circuits, output circuits and supply voltage**
- Input circuit monitoring for wire-break and short-circuit (can be disabled)**
- 2 relay outputs, each with one SPDT contact**
- Selectable NO/NC output function**


The MK13-22Ex0-R type switching amplifiers are dual channel devices featuring intrinsically safe input circuits. They can be connected to sensors according to EN 60947-5-6 (NAMUR), variable resistors or potential-free contacts. The output circuits each feature a relay output with SPDT contact.

Six front panel programming switches select the output function of each channel (normally open mode = switch position A or normally closed mode = switch position R) and enable separate activation and deactivation of wire-break (switch position DB) and short-circuit (switch position K) monitoring of each channel.

When using mechanical contacts as the

input device, wire-break and short-circuit monitoring must be disabled or shunt resistors must be connected to the contacts (II). (See next page for contact configuration).

The green LED indicates that the device is powered. The two dual colour LEDs indicate the switching status (yellow) as well as fault conditions (red). When the input circuit monitoring feature is activated, red illuminates to indicate a fault condition in the input circuit and the respective output relay is de-energised.

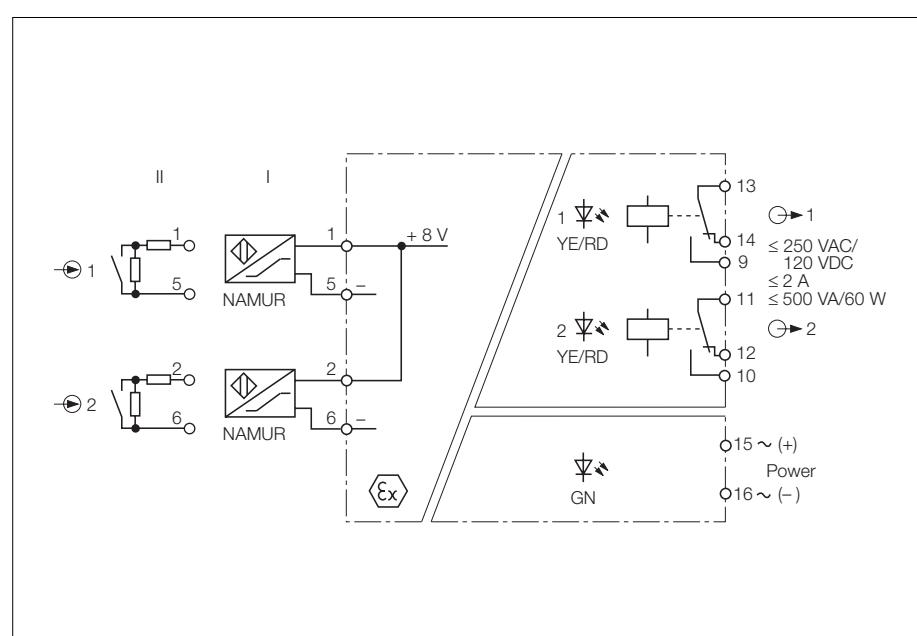

Isolating Switching Amplifier MK13-22Ex0-R

| | | |
|--|--|---|
| Type | MK13-22Ex0-R/230VAC 7541120 | MK13-22Ex0-R/24VDC 7541127 |
| Supply voltage U_B | 196...253 VAC 48...62 Hz $\leq 30 \text{ mA}_{\text{rms}}$ between input circuit, output circuit and supply voltage for 250 V _{rms} , test voltage 2.5 kV _{rms} | 10...30 VDC $\leq 10 \%$ $\leq 1.5 \text{ W}$ between input circuit, output circuit and supply voltage for 250 V _{rms} , test voltage 2.5 kV _{rms} |
| Input circuits | according to EN 60947-5-6 (NAMUR), intrinsically safe according to EN 50020 | according to EN 60947-5-6 (NAMUR), intrinsically safe according to EN 50020 |
| Operating characteristics | | |
| - Voltage | 8 V | 8 V |
| - Current | 8 mA | 8 mA |
| Switching threshold | 1.55 mA | 1.55 mA |
| Hysteresis | typ. 0.2 mA | typ. 0.2 mA |
| Wire-break threshold | $\leq 0.1 \text{ mA}$ | $\leq 0.1 \text{ mA}$ |
| Short-circuit threshold | $\geq 6.0 \text{ mA}$ | $\geq 6.0 \text{ mA}$ |
| Contact configuration | Of mechanical switches with active input circuit monitoring function | resistor module WM1, ident-no. 0912101 |
| Output circuits | 2 relay outputs (SPDT) $\leq 250 \text{ VAC}/120 \text{ VDC}$ $\leq 2 \text{ A}$ $\leq 500 \text{ VA}/60 \text{ W}$ $\leq 10 \text{ Hz}$ silver-alloy + 3 µm Au | 2 relay outputs (SPDT) $\leq 250 \text{ VAC}/120 \text{ VDC}$ $\leq 2 \text{ A}$ $\leq 500 \text{ VA}/60 \text{ W}$ $\leq 10 \text{ Hz}$ silver-alloy + 3 µm Au |
| Ex-approval acc. to certificate of conformity | PTB 99 ATEX 2083 | PTB 99 ATEX 2083 |
| Maximum nominal values | | |
| - No load voltage U_0 | $\leq 11.9 \text{ V}$ | $\leq 11.9 \text{ V}$ |
| - Short-circuit current I_0 | $\leq 36 \text{ mA}$ | $\leq 36 \text{ mA}$ |
| Max. external inductances/capacitances L_0/C_0 | | |
| - [EEx ia] IIB | 87 mH/9.4 µF | 87 mH/9.4 µF |
| - [EEx ia] IIC | 23 mH/1.45 µF | 23 mH/1.45 µF |
| Marking of devices | II (1) G [EEx ia] IIC | II (1) G [EEx ia] IIC |
| LED indications | | |
| - Power | green | green |
| - Switching status/fault indication | 2 x yellow/red (2-colour LED) | 2 x yellow/red (2-colour LED) |
| Housing | 16-pole, 36 mm wide, Polycarbonate/ABS, flammability class V-0 per UL 94 | |
| Mounting | snap-on clamps for top-hat rail (DIN 50022) or screw terminals for panel mounting | |
| Connection | via flat terminals with self-lifting pressure plates | |
| Connection profile | $\leq 2 \times 2.5 \text{ mm}^2$ or $2 \times 1.5 \text{ mm}^2$ with wire sleeves | |
| Degree of protection (IEC 60529/EN 60529) | IP20 | |
| Operating temperature | -25...+60 °C | |

