


ΕΛΕΚΤΡΟΛΥΚΣ Electrolux

INDUSTRIAL THERMOMETERS

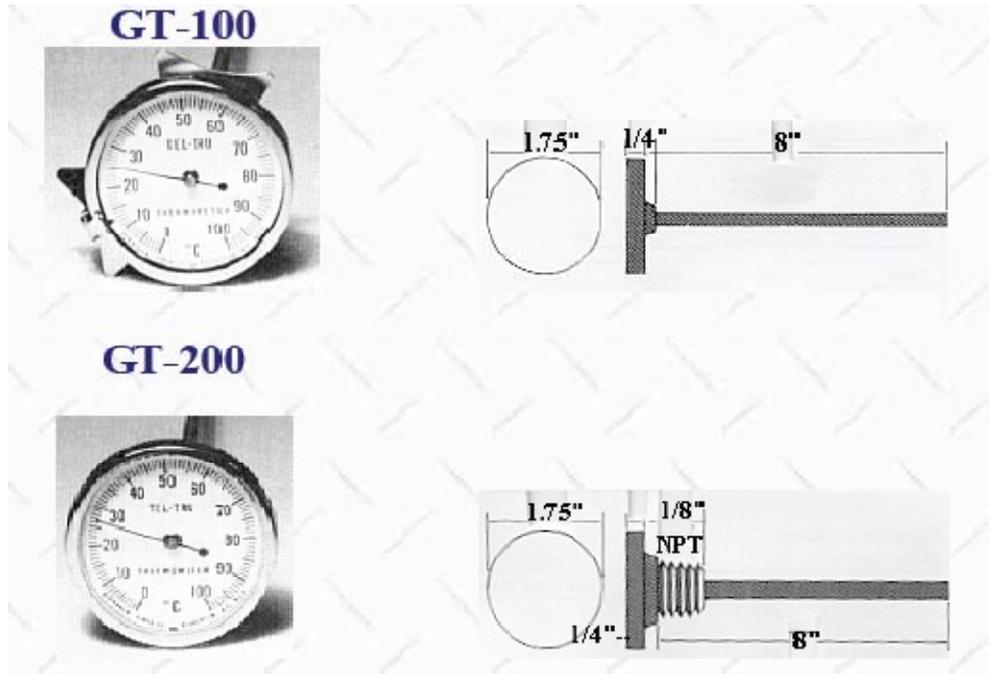



Features: GT-100 and GT-200

- | 18-8 stainless steel construction
- | Corrosion resistant to most chemicals
- | Rustproof, dustproof, leakproof, and hermetically sealed
- | Mounting fitting GT-200 only, 1/8" NPT
- | Head diameter: 1 3/4"
- | Stem diameter is .150"
- | Bi-metallic element dampened with silicone for minimum pointer vibration and maximum heat transfer
- | Guaranteed accurate within one-half of one percent around dial range

Standard Ranges	°/Div.
0° to 220°F	2
50° to 300°F	2
50° to 400°F	5
0° to 100°C	1
0° to 150°C	1

ЕЛЕКТРОЛУКС Electrolux

GT-300

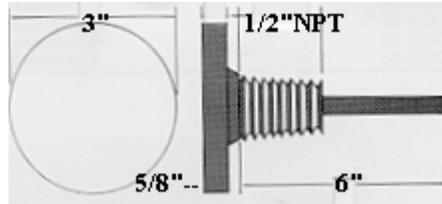

Features: GT-300

- | 18-8 stainless steel
- | All welded construction
- | Anti-Parallax dial avoids reading error
- | Stem diameter is 1/4" standard stem length
- | Guaranteed accurate within one percent around dial range
- | Mounting fitting is 1/2" NPT standard
- | Head diameter: 3"

Standard Ranges	°/Div.
50° to 300°F	2
50° to 550°F	5
0° to 100°C	1
0° to 250°C	2