


DEVI Pipeheat

- Ready made lengths
- Can be installed inside water pipes
- SEMKO, FIMKO and BBJ
- Holds VTT test certificate

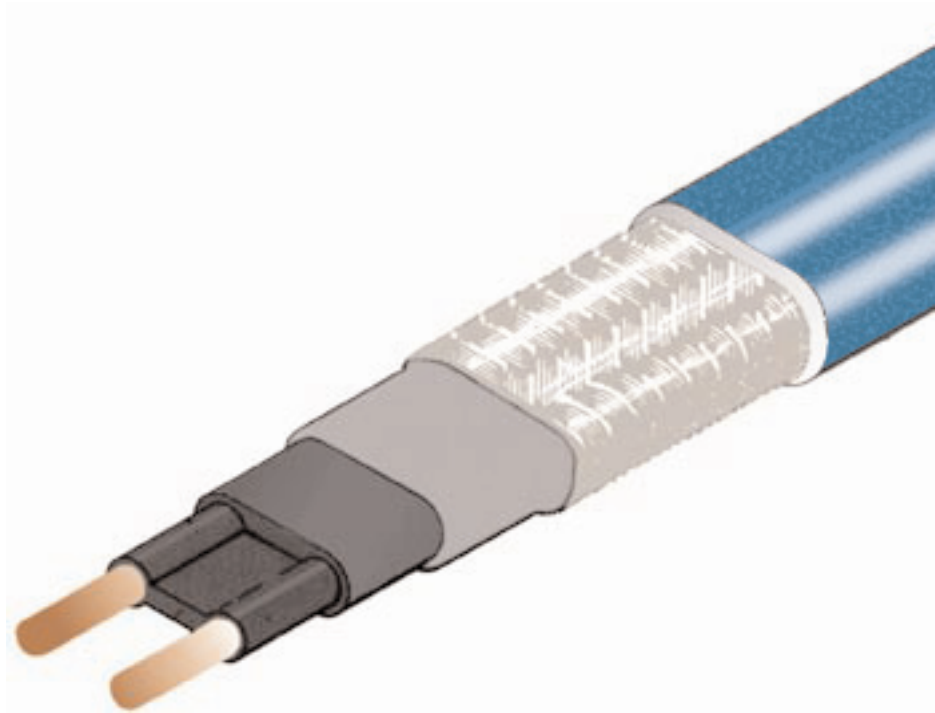

The Devi Pipeheat is a self-limiting parallel heating cable. The power output of the conductive core material increases or decreases in response to ambient temperature changes.

The Devi Pipeheat is used for freeze protection of pipes.

General Specifications

Power Output at 230 VAC	Max. Installation length with 10 A - circuit breaker at 5°
10 W/m	100 m
Minimum bending radius	35 mm (radius to the inside of the tape)
Minimum use temperature	- 30 °C
Max. permissible use temperature	65 °C Powered 85 °C Unpowered
Sheath	Fluoropolymer
Filler sheath	TPE
Max. resistance protective braid	18,2 R/km
Min. Braid Coverage	70 %
Dimensions	7.3 x 5.3 mm