

### Electrolux

Factory - Intelligent Engeneering, Shop, Sales and Service

### 6032 SERIES FUNCTIONAL FEATURES



Ovoj crtez e sopstvenost na Electrolux-Bitola. Bez negovo pismeno odobruvanje istiot nesmee da se prepisuva "umnozuva niti kopira bez soglasnost od Elrctroluks

vo sprotivno se snosat posledici vo smislana clenovite 163 i 164 od krivicniot zakon R.M. (povreda na avtorsko pravo)

















Folding chair that stands out because of its excellent balance between comfort and minimum use of space. The seat tips up automatically as well as the armrests.

The folding system lies in flipping up the armrests with the automatic return of the seat in a single movement.

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk

Elektrouks companies in Macedonia and other countries Elektroluks is registered trademark of



Factory - Intelligent Engeneering, Shop, Sales and Service

Thus, at the same time that the seat folds up automatically, the armrests move up to a vertical position so that the seat folded does not surpass the depth of 350mm. The sequence of movements described takes place automatically when the seat tips up. The backrest always keeps its fixed position.






Elektrouks companies in Macedonia and other countries

Elektroluks is registered trademark of



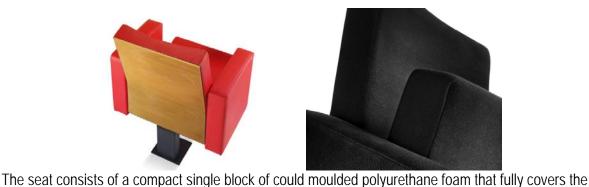

internal metal structure of the seat. This structure comprises a curved tubular frame, a mesh of flat springs and hinge pins for the seat to swivel on. The polyurethane foam block is covered with an easily removable and replaceable zip-on upholstery. The backrest is made in the same manner as the seat. Ergonomics has been the primary aspect for designing both seat and back cushions. Between the upholstery and the foam of both the seat and the back, there is a 5-mm thick TS System fire curtain that keeps fire from reaching the foam, thus preventing the emission of toxic gases and flames. The seat tips up automatically thanks to an extremely quiet double spring system inside the seat shell (tested to 500,000 cycles) that requires no lubrication of any kind and which is extremely quiet. The armrests also consist of a single upholstered block Inside the armrest there is also an extremely quiet return spring (tested at 500.000 cycles), that requires no lubrication and which is extremely quiet.

Ovoj crtez e sopstvenost na Electrolux-Bitola. Bez negovo pismeno odobruvanje istiot nesmee da se prepisuva ,umnozuva niti kopira vo sprotivno se snosat posledici vo smislana clenovite 163 i 164 od krivicniot zakon R.M. (povreda na avtorsko pravo)

bez soglasnost od Elrctroluks

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk



bez soglasnost od Elrctroluks

Ovoj crtez e sopstvenost na Electrolux-Bitola. Bez negovo pismeno odobruvanje istiot nesmee da se prepisuva ,umnozuva niti kopira

vo sprotivno se snosat posledici vo smislana clenovite 163 i 164 od krivicniot zakon R.M. (povreda na avtorsko pravo)


# Electrolux

Factory - Intelligent Engeneering, Shop, Sales and Service

Elektrouks companies in Macedonia and other countries

Elektroluks is registered trademark of

The set of seat, back and armrests, is supported by a central foot, which consists of a tubular column of steel with a steel plate for floor fixation and a central bridge. The housings for the hinges are located in this central bridge –with a blocking mechanism- where the axes of the seat are supported. In conjunction with the F 45 table, this is an ideal solution for long working sessions and conferences.



### TECHNICAL CHARACTERISTICS

STRUCTURE:

• Steel plate and tube, welded with continuous arc.

POLYURETHANE FOAM:

- Seat density: 65 Kg. m3
- Back density: 57 Kg. m3

Sto POLYURE Se Ba

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk



# Electrolux

Factory - Intelligent Engeneering, Shop, Sales and Service

### PAINT:

- Electrostatic powder epoxy
- Coating thickness: 70-80 micra
- Grid adherence: 100%

#### **UPHOLSTERY:**

Pilling: Index 5 BS 5811

### **ALUMINIUM:**

- Material: UNE L-2630
- Breaking Load: 20 Kg./mm2

### FIRE STANDARDS

England:

Ovoj crtez e sopstvenost na Electrolux-Bitola. Bez negovo pismeno odobruvanje istiot nesmee da se prepisuva ,umnozuva niti kopira bez soglasnost od Elrctroluks

BS5852. Section 5. Ignition Sources 0, 1 and 5

Germany:

DIN54342 part 1 and 2

Italy:

vo sprotivno se snosat posledici vo smislana clenovite 163 i 164 od krivicniot zakon R.M. (povreda na avtorsko pravo)

CSE RF/4/83 class 1. IM

Spain/France:

UNE 23727/NF 92-503

Upholstery: M1/Foam: M4/Plastic: M3

WEIGHT:

28 Kg.

**VOLUME:** 

0,18 m3 (K.D.)

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk

Elektrouks companies in Macedonia and other countries Elektroluks is registered trademark of