


DEVI Pipeguard

- Can be used with CONNECTO™
- Cut to length on site
- VDE, FIMKO and BBJ
- Black version is UV protected

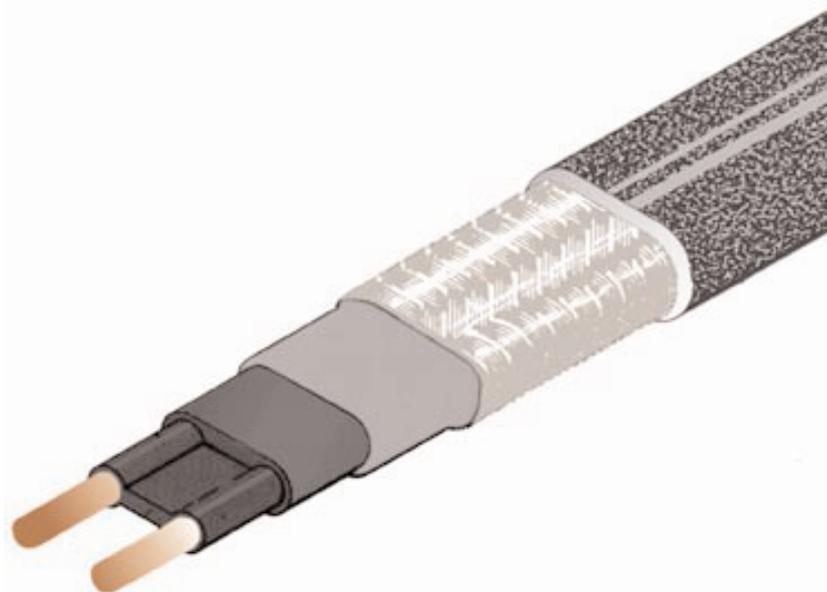

The Devi Pipeguard is a self-limiting parallel heating cable. The power output of the conductive core material increases or decreases in response to ambient temperature changes.

The Devi Pipeguard is used for freeze protection of roofs and gutters.

General Specifications

Power Output at 230 VAC	Max. Installation length with at 5°	
	10 A circuit breaker	16 A circuit breaker
10 W/m	115 m	190 m
15 W/m	60 m	80 m
25 W/m	55 m	80 m
Minimum bending radius	25 mm (radius to the inside of the tape)	
Minimum use temperature	- 30 °C	
Max. permissible use temperature	65 °C Powered 85 °C Unpowered	
Max. resistance protective braid	18,2 W/km	
Min. Braid Coverage	70 %	
Dimensions	11,5 x 5,5 mm	