


Devicell™ dry

For dry installations
direct under Wooden
floors

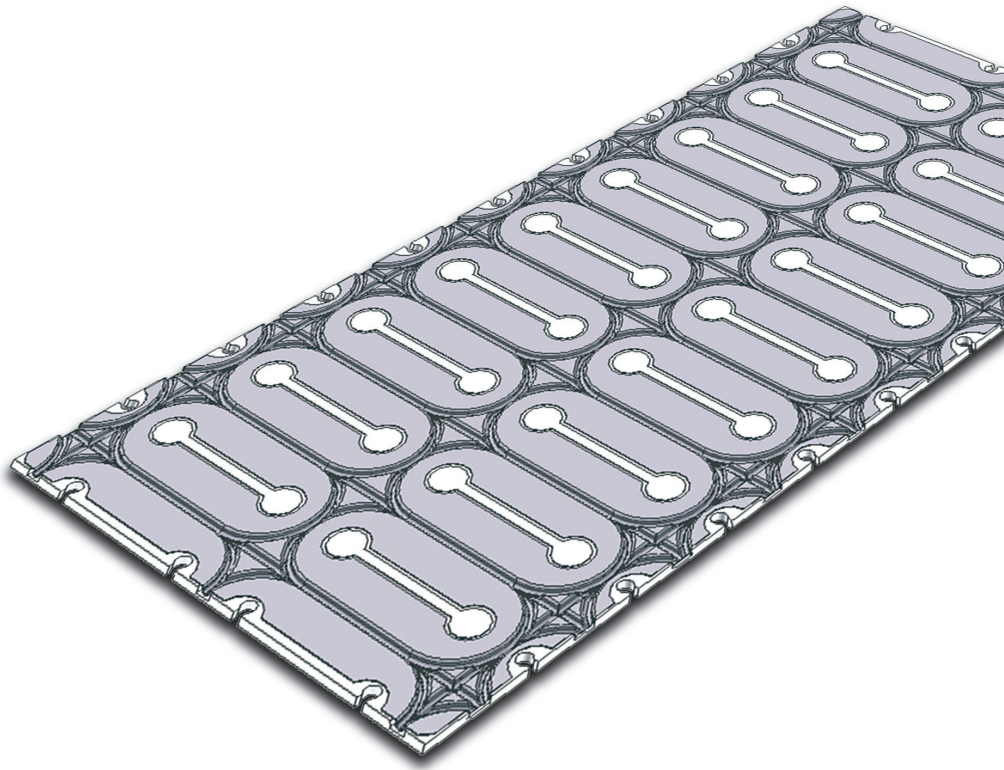

Features:

- Custom designed for DTIP and DTIE
- Interlocking for cable protection
- 100% heat coverage
- Quick response
- Perfect for timer thermostats
- Safe to walk on
- Grooves for easy cable installation

Technical data - in general:

Construction	Polystyren with aluminium
U value	3
Size	50 x 100 cm
Thickness	13 mm
Alu. thickness	1 mm
Insulation	12 mm fire retardent EPS
Deformation strenght	3670 kg/m ²
Max working temp.	80°C
Box size	10 plates, 5 m ²
Accessories	Sensor casing, flexpipe

DEVI A/S
Ulvehavevej 61
DK - 7100 Vejle
Tel.: +45 76 42 47 00
Fax.: +45 76 42 47 01
info@devi.com
www.devi.com

DEVI  TM
Member of the Danfoss Group