



# ЕЛЕКТРОЛУКС Electrolux

*Factory - Intelligent Engineering, Shop, Sales and Service*

## 6036 SERIES FUNCTIONAL FEATURES



Folding chair that stands out because of its excellent balance between comfort and minimum use of space. The seat tips up automatically.

The seat consists of a compact single block of cold moulded polyurethane foam that fully covers the internal metal structure of the seat. This structure comprises a curved tubular frame, a mesh of flat springs and hinge pins for the seat to tip up. The block is covered with an easily removable and replaceable zip-on upholstery. The backrest is constructed in the same manner as the seat.

**Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje**

**www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk**

Ovaj cifaz e sopstvenost na Electrolux-Bitola.Bez negovo pismeno odobruvanje istiot nesmee da se prepisuva ,umnozuvata niti kopira bez soglasnost od Electrolux vo sprotno se snosat posledici vo smislana clenovite 163 i 164 od kriticniot zakon R.M. (povreca na avtorsko pravo)

Electrolux is registered trademark of Elektroluks companies in Macedonia and other countries



# ЕЛЕКТРОЛУКС Electrolux

*Factory - Intelligent Engineering, Shop, Sales and Service*

Ovaj cifrez e sopstvenost na Electrolux-Bitola.Bez negovo pismeno odobruvanje isliot nesmee da se prepisuva ,umnozuvata niti kopira bez soglasnost od Electroluks vo sproitivno se snosat poslednici vo smislana clenovite 163 i 164 od kriticniot zakon R.M. (povreda na avtorsko pravo)

The armrests also consist of a compact single block of cold moulded polyurethane foam that fully covers the internal metal structure of the arm.

Ergonomics has been the primary aspect for designing both seat and back cushions and the seat enhances maximum comfort.



Between the upholstery and the foam of both the seat and the back, there is a 5-mm thick TS System fire curtain that keeps fire from reaching the foam, thus preventing the emission of toxic gases and flames.

Electroluks is registered trademark of Elektroluks companies in Macedonia and other countries

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk



# ЕЛЕКТРОЛУКС Electrolux


*Factory - Intelligent Engeneering, Shop, Sales and Service*

Ovaj cifrez e sopstvenost na Electrolux-Bitola.Bez negovo pismeno odobruvanje isliot nesmee da se prepisuva ,umnozava niti kopira bez soglasnost od Eictrroluks vo sproitivno se snosat posledici vo smislana clenovite 163 i 164 od kriviciot zakon R.M. (povreda na avtorsko pravo)

Electroluks is registered trademark of Elektroluks companies in Macedonia and other countries

The seat tips up automatically thanks to an extremely quiet double spring system inside the seat shell (tested to 500,000 cycles) that requires no lubrication of any kind. The chair is mounted on two feet connected by a central steel bridge which supports the backrest, and two side wings that also support the hinge pins on which the seats rests. In conjunction with the F 45 table, this is an ideal solution for long working sessions and conferences.

## TECNICAL CHARACTERISTICS

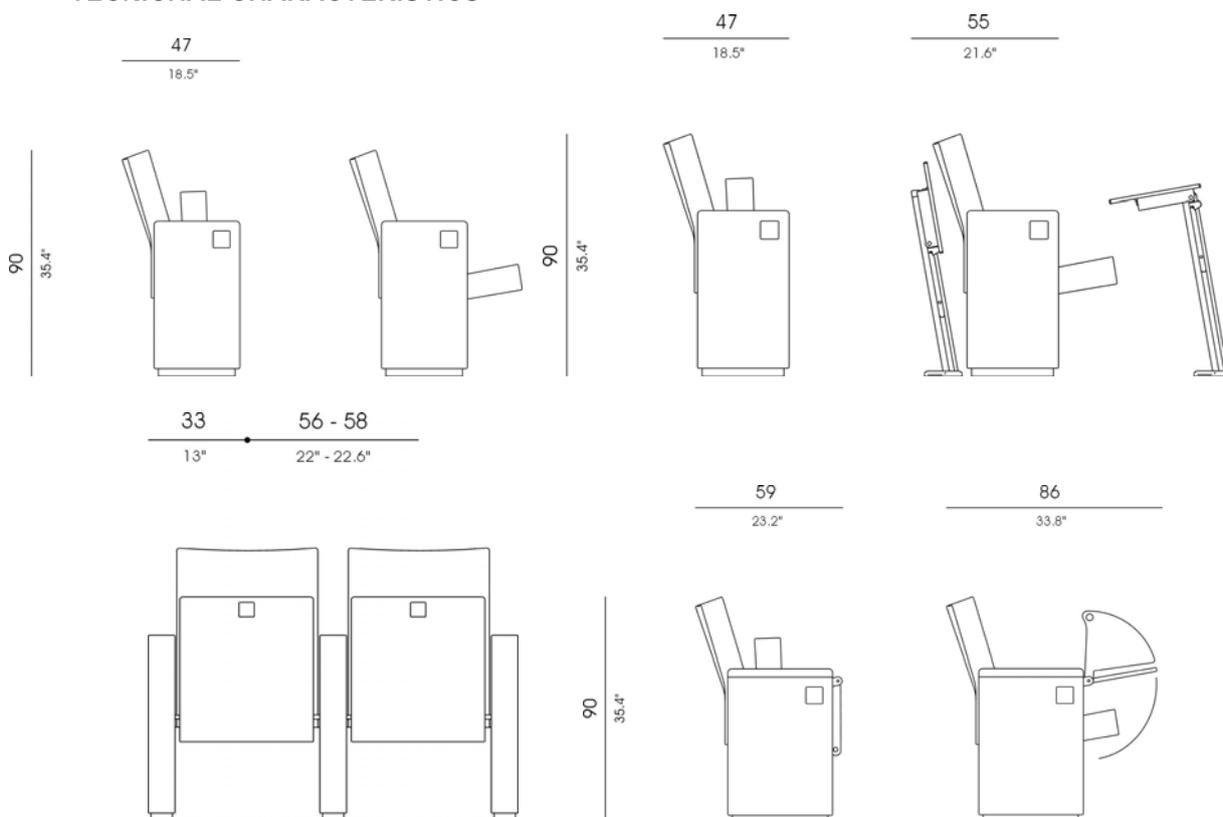

### STRUCTURE:

Steel plate and tube, welded with continuous arc.

### POLYURETHANE FOAM:

Seat density: 65 Kg. m3

Back density: 57 Kg. m3

**Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje**

**www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk**




# ЕЛЕКТРОЛУКС Electrolux

*Factory - Intelligent Engineering, Shop, Sales and Service*

Ovo je sveska sa sveskom na Electrolux-Bitola. Bez negovo pismeno odobruvanje istiot nesmee da se prepisuva, umnozava niti kopira bez soglasnost od Electroluks vo sprotivno se snosat posledici vo smislana clenovite 163 i 164 od kriviciot zakon R.M. (povreda na avtorsko pravo)

33 56 - 58  
13" 22" - 22.6"

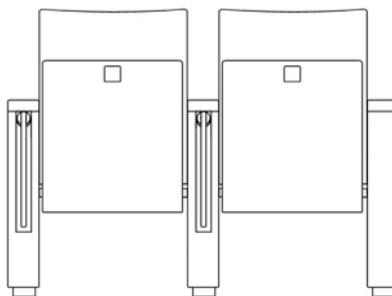

#### PAINT:

Electrostatic powder epoxy  
Coating thickness: 70-80 micra  
Grid adherence: 100%

#### UPHOLSTERY:

Pilling: Index 5 BS 5811

#### ALUMINIUM:

Material: UNE L-2630  
Breaking load: 20kg/sq mm

#### FIRE STANDARS

England: BS5852. Section 5. Ignition Sources 0, 1 and 5  
Germany: DIN54342 part 1 and 2  
Italy: CSE RF/4/83 class 1. IM  
Spain/France: UNE 23727/NF 92-503  
Upholstery: M1/Foam: M4/Plastic: M3

WEIGHT: 30 Kg.

VOLUME: 0,18 m3 (K.D.)

**Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje**

**www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk**

Electroluks is registered trademark of Elektroluks companies in Macedonia and other countries