




# LONGLIFE *stone*

*Extreme hard wearing stone-care for stone floors*

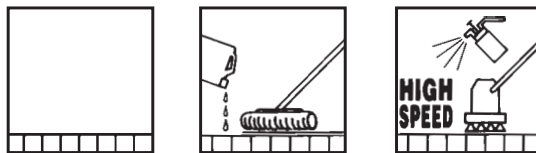

**Ingredients:**

LONGLIFE stone contains: <5% non-ionic surfactants, preservatives. Further ingredients: polymers, waxes, glycol ether, softener, perfumes.

**Performance:**

LONGLIFE Stone is a high gloss, particularly hard wearing protection for all natural and artificial stone floorings. Upon appropriate application LONGLIFE stone ensures a glossy, hard wearing protective film. This protective film has a high filling capacity, closes the pores and gives a uniform, high gloss appearance after the first application. The hard wearing property of the dispersion guarantees a sustained protection from soiling and black heel marks, and ensures a good slip-resistance. Makes Maintenance cleaning easier. Detergence resistance is excellent. Agreeable fragrance.

**Application notes:**

Convenient for stone floorings, natural or fabricated, including absorbent stone floors. Do not use on glazed tiles and fine stone surfaces.

**Usage:**

1. Stripping:

Remove any dirty or sticky residues on the floor with GR's or LINAX Plus by diluting in the ratio 1:10 to 1:2 (according to the level of soiling). Please observe the use of convenient pads or scrubbers. For most stone floorings the use of a scrubber is recommended, for natural stone floors dark pads (green to black) should be used. Make sure to wipe off with clean water.

2. Initial Care (Coating):

Apply LONGLIFE stone undiluted 2-3 times on the stripped and dry stone floor. Please make sure you let the floor dry sufficiently between the second and third application. For absorbent stone floors three applications are recommended. Used Quantity per application: 1,5 l - 2,5 l per 100 m<sup>2</sup>

3. Long-term Care:

Application as mentioned under point 2. After sufficient drying of the coating polish with a High-Speed or Super-High-Speed-Machine. Apply a second time, let the coating dry sufficiently and re-polish again. The protection film will be compressed and possesses a longer lasting durability.

4. Maintenance Cleaning (Coating):

We recommend the following wipe care products; VIONET, TAWIP or WIPGO with a solution of approx. 1%. For an application with Maintenance-Cleaners we recommend SR13 or FR66.

**Ecology:**

This product is subject to regulations governing the environmental compatibility of washing and cleaning agents and the associated regulations on the biological degradability of the raw materials used.

Comprehensive information about the environmental characteristics of this product is available on request.

Give only completely empty packaging to a special waste-disposer.

This product is designated for industrial use.

Keep from freezing.

UBA 0947 0785

Produkt-Code: GE 20

Waste-Key: 080299

|                |     |
|----------------|-----|
| Art.-Nr. 07623 | 10l |
| Art.-Nr. 07624 | 5l  |

