



XF 135

ARIANNA Dynamic

4 460 x 330

XF 130

ARIANNA Classic

4 460 x 330

XF 133

ARIANNA Manual Humidity

4 460 x 330

XF 119

STEFANIA Matic

3 460 x 330

	XF 135	XF 130	XF 133	XF 119
Capacity	4 460x330	4 460x330	4 460x330	3 460x330
Pitch	75 mm	75 mm	75 mm	75 mm
Voltage	230 V~ IN	230 V~ IN	230 V~ IN	230 V~ IN
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Electrical power	3 kW	3 kW	3 kW	3 kW
Max temperature	260 °C	260 °C	300 °C	260 °C
Dimensions	600x670x509 WxDxH mm	600x670x509 WxDxH mm	600x670x509 WxDxH mm	600x670x429 WxDxH mm
Weight	31 kg	31 kg	31 kg	25 kg
Humidity	x		x	x



XF 115

STEFANIA Dynamic

3 460 x 330

XF 110

STEFANIA Classic

3 460 x 330

XF 113

STEFANIA Manual Humidity

3 460 x 330

XF 100

CRISTINA Classic

3 342 x 242

	XF 115	XF 110	XF 113	XF 100
Capacity	3 460x330	3 460x330	3 460x330	3 342x242
Pitch	75 mm	75 mm	75 mm	75 mm
Voltage	230 V~ IN	230 V~ IN	230 V~ IN	230 V~ IN
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Electrical power	3 kW	3 kW	3 kW	3 kW
Max temperature	260 °C	260 °C	300 °C	260 °C
Dimensions	600x670x429 WxDxH mm	600x670x429 WxDxH mm	600x670x429 WxDxH mm	480x540x429 WxDxH mm
Weight	25 kg	25 kg	25 kg	20 kg
Humidity	x		x	




XF195

ROSSELLA Dynamic
4 600x400



XF190

ROSSELLA Classic
4 600x400

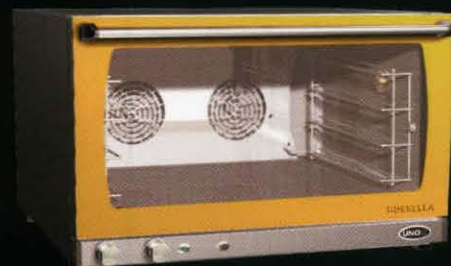

XF193

ROSSELLA Manual Humidity
4 600x400

	XF 195	XF 190	XF 193
Capacity	4 600x400	4 600x400	4 600x400
Pitch	75 mm	75 mm	75 mm
Voltage	230 V~ 1N / 400 V~ 3N	230 V~ 1N / 400 V~ 3N	230 V~ 1N / 400 V~ 3N
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Electrical power	6,3 kW	6,3 kW	6,3 kW
Max temperature	260 °C	260 °C	300 °C
Dimensions	800x790x509 WxDxH mm	800x790x509 WxDxH mm	800x790x509 WxDxH mm
Weight	49 kg	49 kg	49 kg
Humidity	x		x



XF 185 ELENA Dynamic

XF 188 ELENA Power Dynamic
3 600x400



XF 180

ELENA Classic
3 600x400



XF 183

ELENA Manual Humidity
3 600 x 400

	XF 185	XF 188	XF 180	XF 183
Capacity	3 600x400	3 600x400	3 600x400	3 600x400
Pitch	75 mm	75 mm	75 mm	75 mm
Voltage	230 V~ 1N	230 V~ 1N / 400 V~ 3N	230 V~ 1N	230 V~ 1N
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Electrical power	3,2 kW	4,6 kW	3,2 kW	3,2 kW
Max temperature	260 °C	260 °C	260 °C	300 °C
Dimensions	800x790x429 WxDxH mm	800x790x429 WxDxH mm	800x790x429 WxDxH mm	800x790x429 WxDxH mm
Weight	40 kg	40 kg	40 kg	40 kg
Humidity	x	x		x