


LCC50

Compact retractable locating pin unit

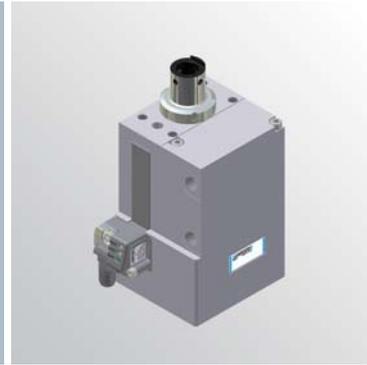

L	C	C	5	0	0	5	0	U	A	E	R
1	2	3		4			5	6	7	8	

1 Series	2 Version	3 Size
-----------------	------------------	---------------

LC = Retractable locating pin unit

C = Pneumatic compact

50 = \varnothing 50 mm

4 Strokes	5 Sensing style	6 Rod end style
------------------	------------------------	------------------------

015 = 15 mm
025 = 25 mm
040 = 40 mm

N = No sensor
(with protection plate)
U = Electronic 24 Vdc sensor with M12
swivel connector

A = Rod for off-set pins
B = Rod with profiled ends
C = Rod with cross-profiled ends
D = Rod for off-set pins with oversize
dowel holes

7 Rod orientation only with A and D rod end styles	8 Rod scraper
--	----------------------

E = east, standard



O = west



N = north




S = south



R = Rod scraper in stainless steel

■ Rod end style

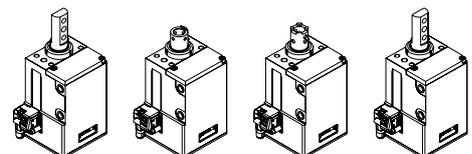

Type A


Type B

Type C

Type D



Compact pneumatic retractable locating pin unit

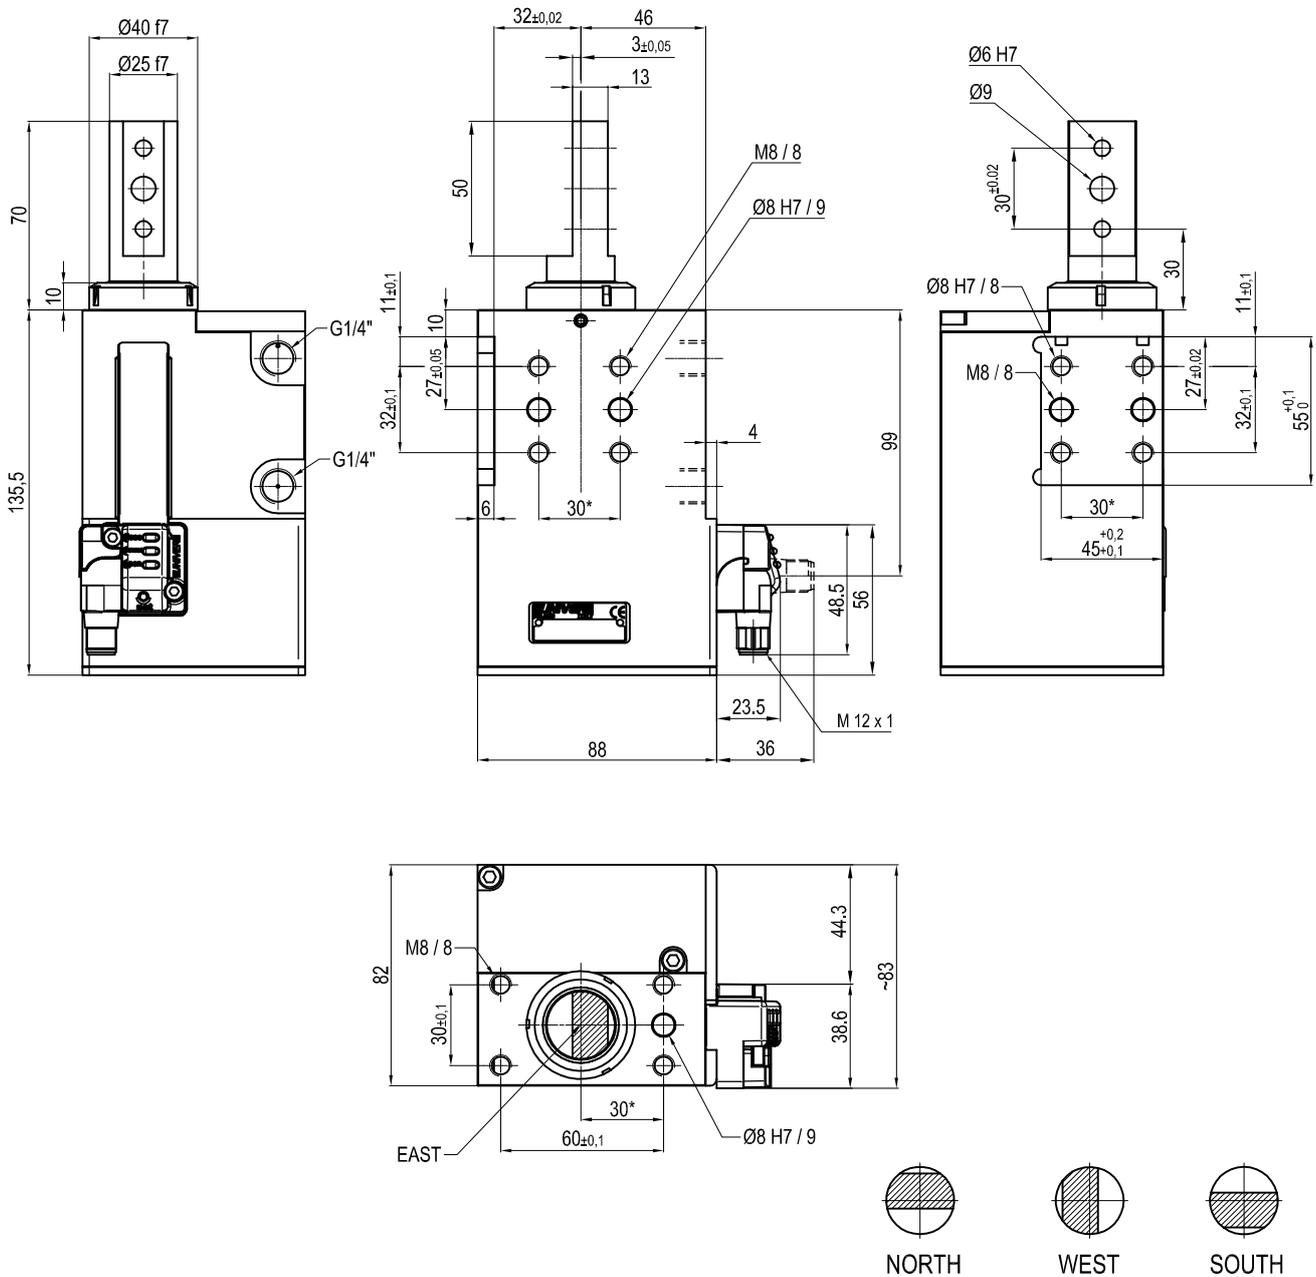

Bore Ø	Max. radial thrust	Max. axial thrust at 0.5 MPa	Max. torque	Max. deflection moment	Max. rotating on the rod	Max. deflection angle	Weight
50 mm	150 N	700 N	6 Nm	7.5 Nm	±0.03°	±0.03°	2.7 Kg

Min./max. operating pressure: **0,4 / 0,8 MPa**
 Operating temperature: **5° + 45° C**
 Strokes in mm.: **15 - 25 - 40**



Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°

Protection class: **IP 65**

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

Compact pneumatic retractable locating pin unit

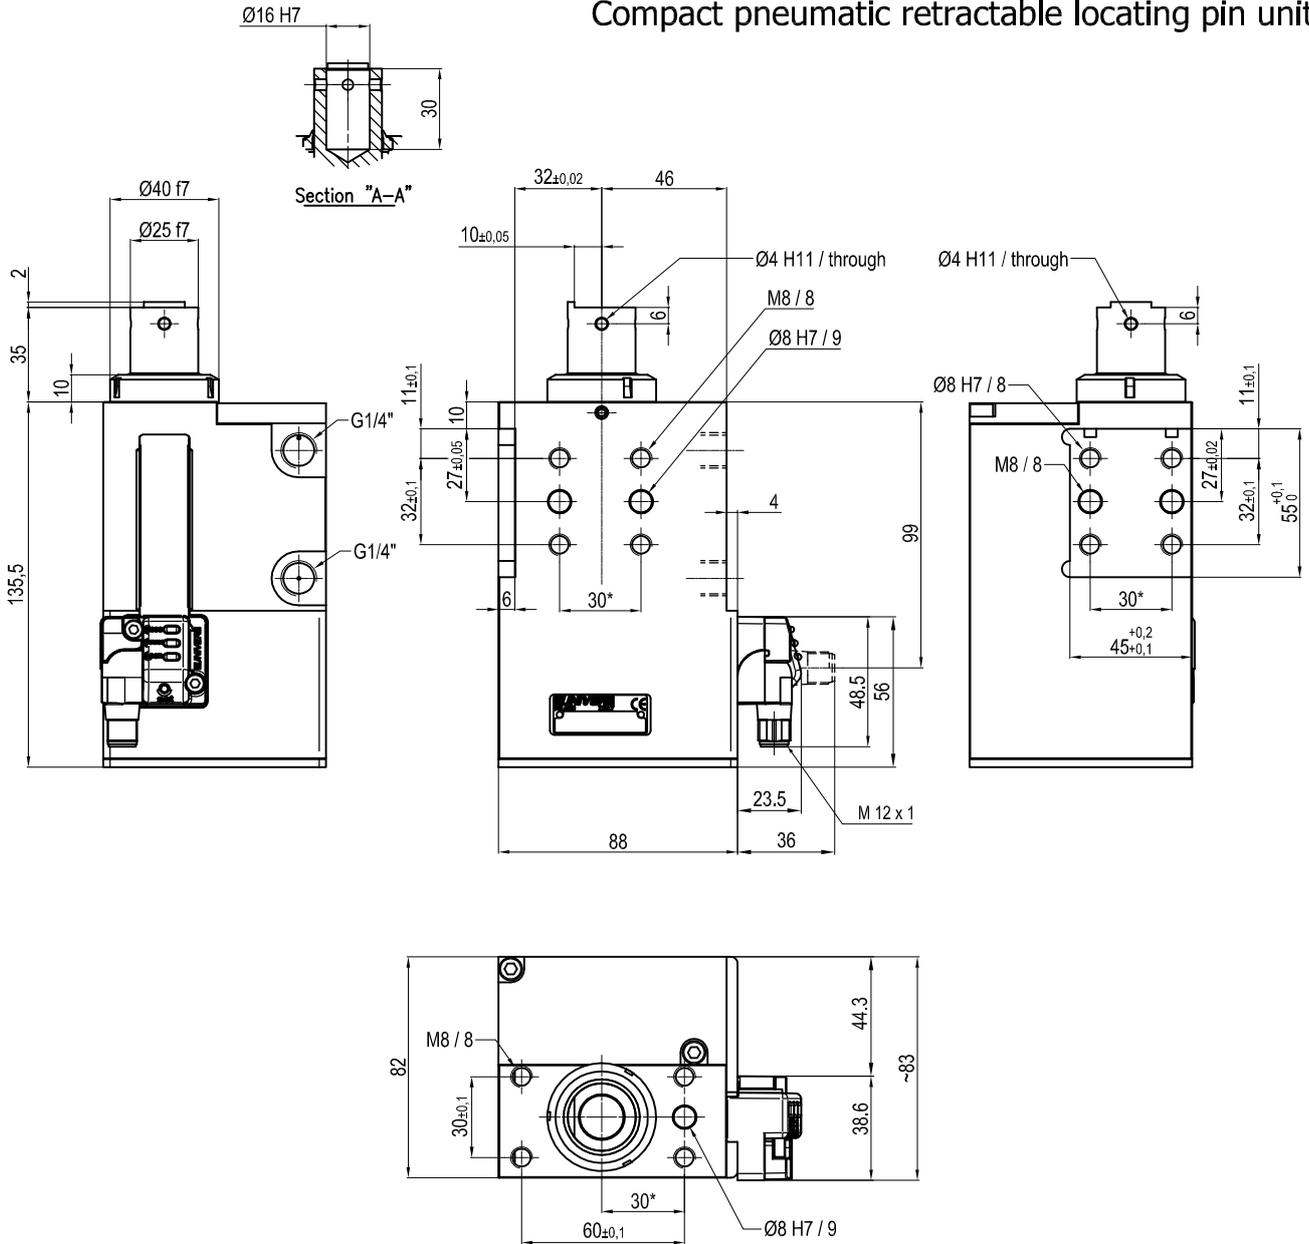

Min./max. operating pressure: **0,4 / 0,8 MPa**
 Operating temperature: **5° + 45° C**
 Strokes in mm.: **15 - 25 - 40**

Bore Ø	Max. radial thrust	Max. axial thrust at 0.5 MPa	Max. torque	Max. deflection moment	Max. rotating on the rod	Max. deflection angle	Weight
50 mm	150 N	700 N	6 Nm	7.5 Nm	±0.03°	±0.03°	2.7 Kg


Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°

Protection class: **IP 65**

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

Compact pneumatic retractable locating pin unit

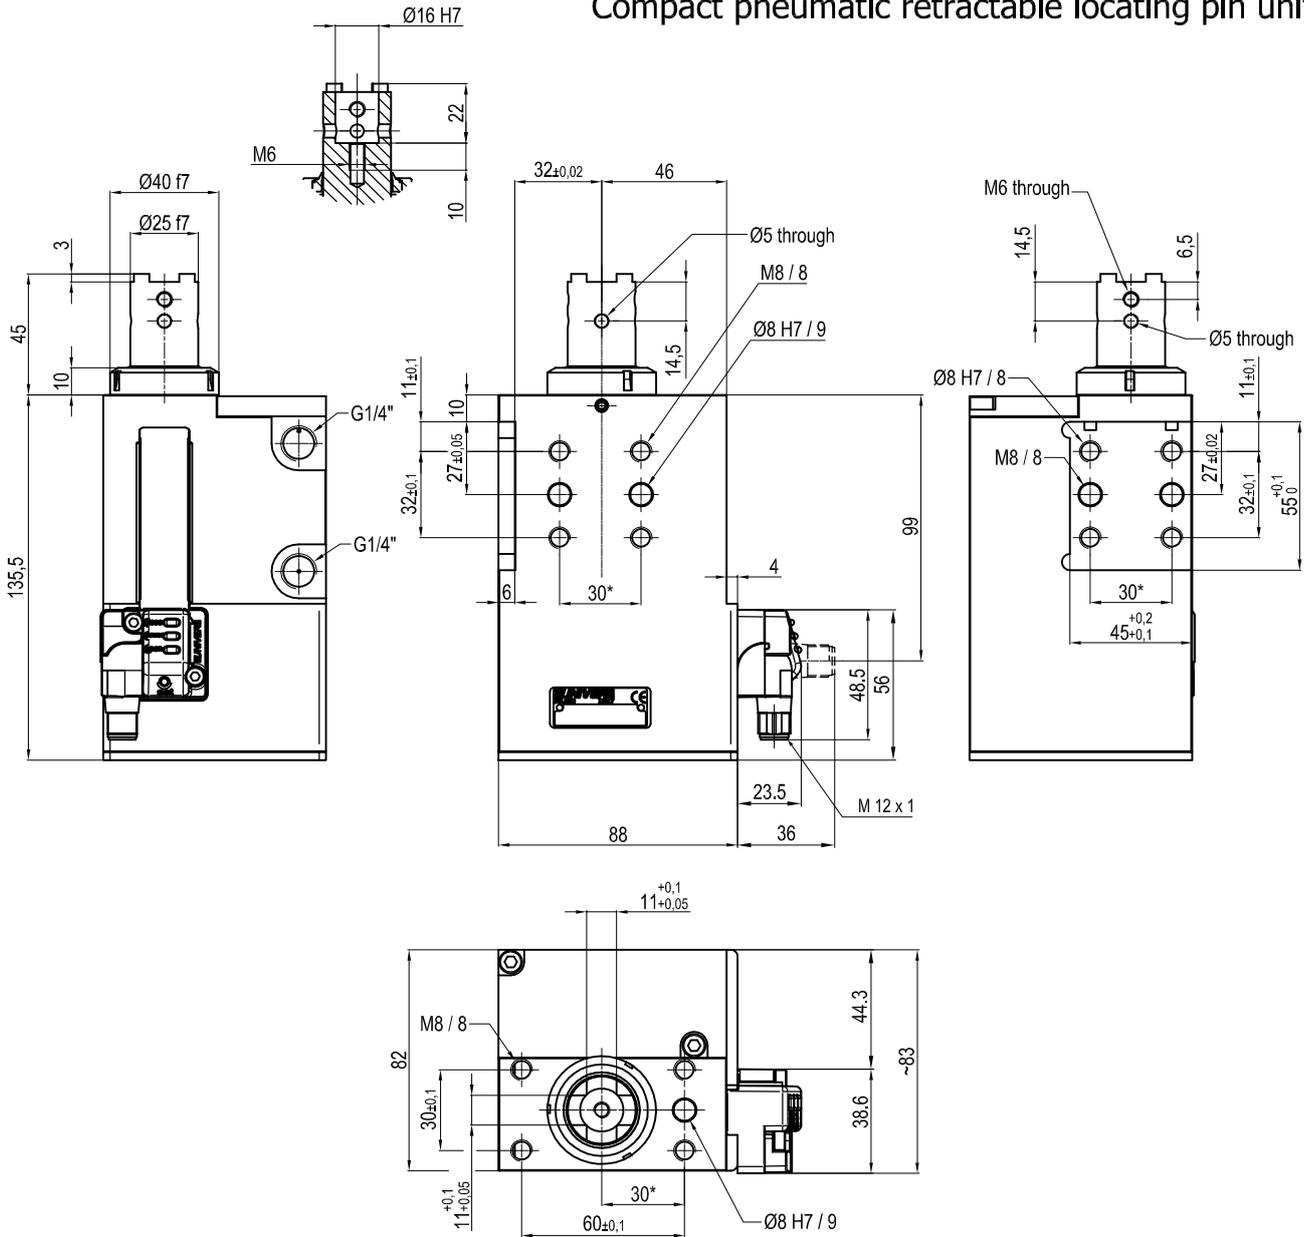

Bore Ø	Max. radial thrust	Max. axial thrust at 0.5 MPa	Max. torque	Max. deflection moment	Max. rotating on the rod	Max. deflection angle	Weight
50 mm	150 N	700 N	6 Nm	7.5 Nm	±0.03°	±0.03°	2.7 Kg

Min./max. operating pressure: **0,4 / 0,8 MPa**
 Operating temperature: **5° + 45° C**
 Strokes in mm.: **15 - 25 - 40**




Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°

Protection class: **IP 65**

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

Compact pneumatic retractable locating pin unit

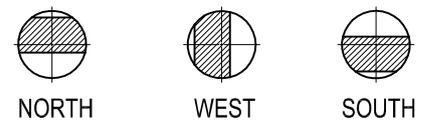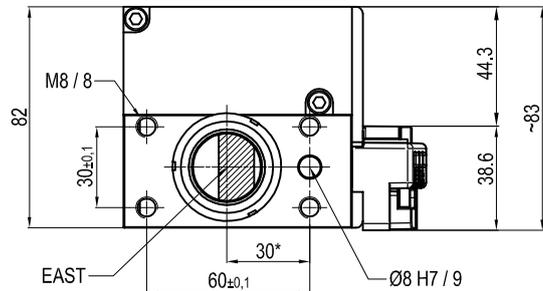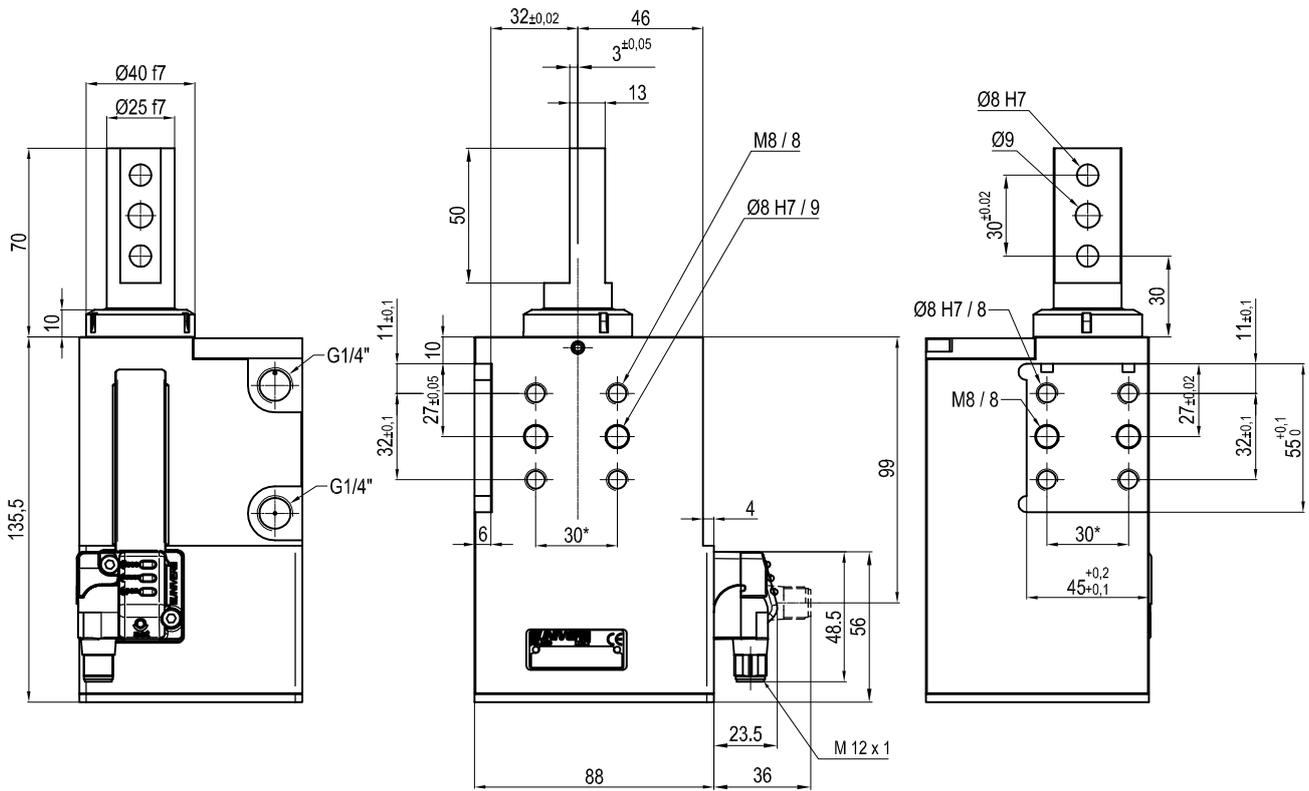

Bore Ø	Max. radial thrust	Max. axial thrust at 0.5 MPa	Max. torque	Max. deflection moment	Max. rotating on the rod	Max. deflection angle	Weight
50 mm	150 N	700 N	6 Nm	7.5 Nm	±0.03°	±0.03°	2.7 Kg

Min./max. operating pressure: **0,4 / 0,8 MPa**
 Operating temperature: **5° + 45° C**
 Strokes in mm.: **15 - 25 - 40**

Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°

Protection class: **IP 65**

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.