




bluepoint 4 ecocure

Highlights

- economical
- high intensity
- long lamp life
- adjustable lamp output

bluepoint 4 ecocure is an **economical high-performance point source** for all applications that need maximum UV intensity. Due to its **high intensity** short-cycle times can be realized.

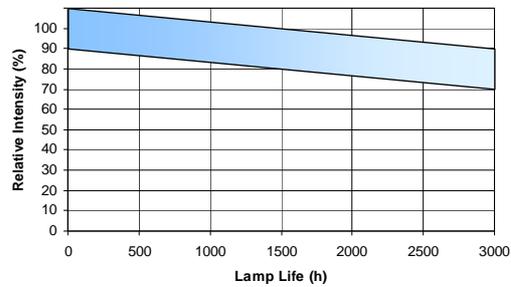

Typical UV intensity drop

The typical **lamp life is approx. 3.000 hours** (guaranteed lamp life 2.000 hours). It is possible to readjust the lamp output in order to maintain the intensity.



A slide out module at the front panel of the housing ensures an **easy replacement of the lamp**. A user-friendly operation is possible through a touch-sensitive keypad.

Lamp / shutter control

The exposure time is selectable between 0.1 and 999.9 seconds. It is also possible to operate the shutter by a foot-switch or a dry contact.

The **electrical lamp output can be adjusted in 1% steps from 60% to 100%**. The unit memorizes operating hours and lamp running hours.

Interfaces

bluepoint 4 ecocure has an interface for a software update and a dry contact for an error signal.

Additional features

The parameter settings can be memorized on 6 storage locations and loaded when needed. The current parameter settings are maintained even after switching off the mains supply.


Error and warning messages are indicated at the display. Furthermore, bluepoint 4 ecocure has a standby function when the lamp is switched off.

Language of menu texts can be chosen between German, English, French and Italian. Three different filters are available to adapt the spectral output to the application.

Light guides

The following light guides are available:

- Single light guide with the diameters 3 mm, 5 mm and 8 mm
- Double, triple and quadruple light guides with a diameter of the single arms of 3 mm each
- Standard lengths of 1 m and 1.5 m
- Differing lengths on request

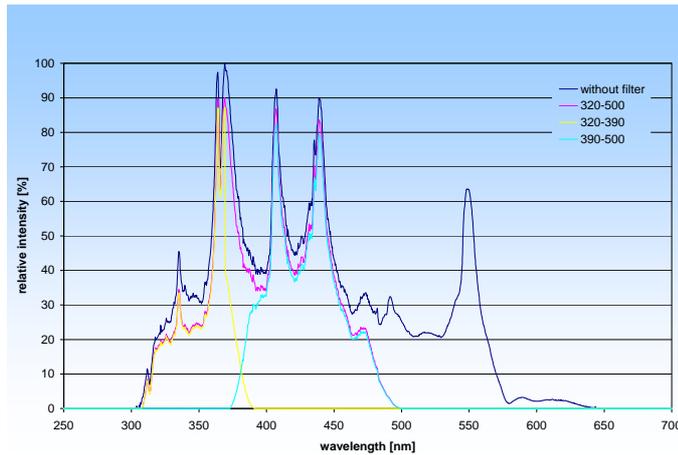


Spectra bluepoint 4 ecocure with different filters

Applications

bluepoint point sources are suitable for a large range of applications:


- Bonding, fixing or potting of components in the electronic, optical and medical industry
- Fluorescent excitation for material testing and image processing
- High-intensity UV irradiation for chemical, biological and pharmaceutical purposes

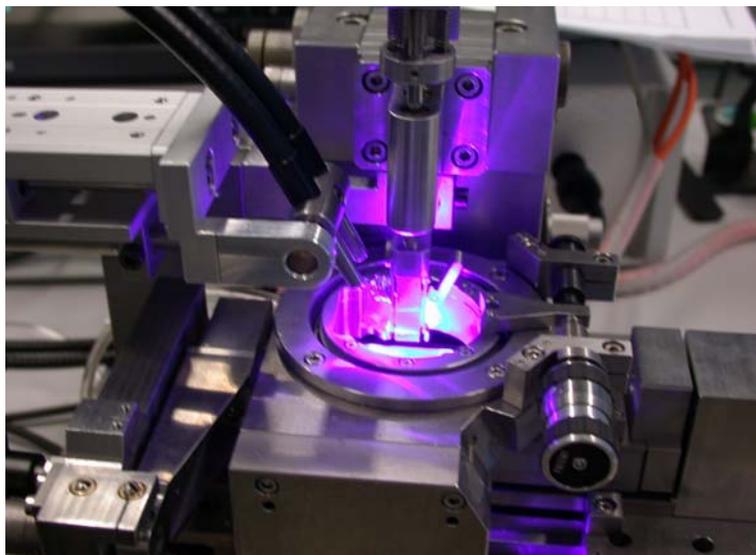

Technical data bluepoint 4 ecocure

UVA- Intensity *)	2000 – 14000 mW/cm ²
Typical lamp life	> 3.000 hours
Timer setting range	0,1 – 999,9 sec
High-pressure mercury lamp	150 W
Mains supply	90 V – 264 V, 47 Hz – 63 Hz
Input current max.	2,2 A
Power rating	200 W
Dimensions (H x W x D)	155 mm x 450 mm x 310 mm
Weight	9,5 kg

*) measured with 8mm test light guide and
Dr. Hönle UV meter with UVA light guide sensor

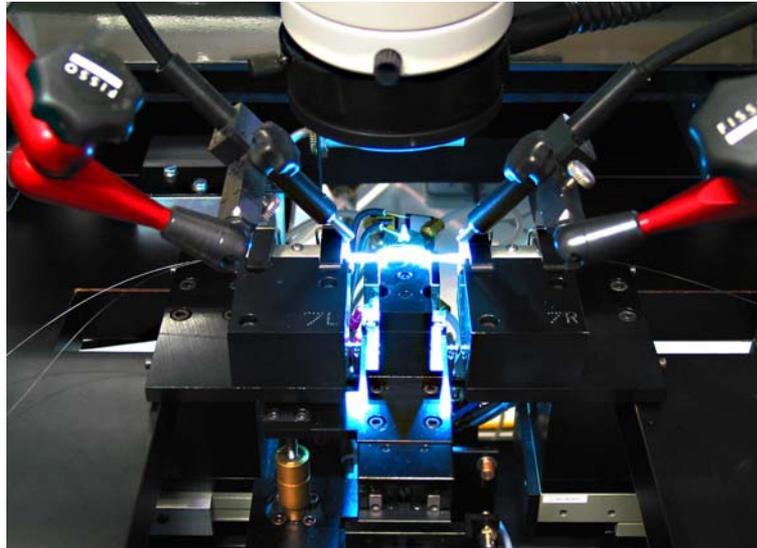

Dr. Hönle AG • UV Technology • Lochhamer Schlag 1 • D- 82166 Gräfelfing/München
Phone: +49 (0)89/8 56 08-0 • Fax: +49 (0)89/8 56 08-148 • E-Mail: uv@hoenle.de
Internet: www.hoenle.de

Operating parameters depend on production characteristics and may differ from the foregoing information. We reserve the right to modify technical data.



Certified
ISO 9001